

Merchandiser

SWING DOOR

- EDM-17
- EDMD-23
- EDMD-49
- EDM-17F
- EDMD-23F

STANDARD FEATURES

● DURABLE CONSTRUCTION

Our merchandisers boast a sturdy stainless steel floor and easy to clean, ETL approved white coated steel walls. Exterior is stylish black laminated vinyl for refrigerators and white vinyl for freezers.

● ERGONOMICALLY DESIGNED DOORS

"Low E" double pane thermal insulated glass doors on refrigerators and triple pane on freezers. Easy grip handles on the aluminium frame and self closing/90 ° stay open door feature, work together for customer convenience.

● LED LIGHT

"Low-E" consumption LED interior lights provide greater visibility, shadow-free illumination and enhanced product display and last up to 10 times longer than fluorescent lights.

● MAGNETIC DOOR GASKET

The one piece magnetic gasket is removable without tools. Positive seal closure assures ease of cleaning and replacement.

● TEMPERATURE CONTROLLER

Edesa's modern control system enables energy efficiency. Freezers come standard with digital controller for extra precision.

● HIGH DENSITY POLYURETHANE INSULATION

CFC-free polyurethane insulation foamed in place including the mullion for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

● EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F and R-404A Freezers maintain temperature from -8°F to -0°F. Hot gas evaporator in drain pan for efficient condensate evaporation.

● BOTTOM MOUNT COMPRESSOR

Allows easy access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment resulting in longer compressor life.

● SHELVES

Adjustable epoxy coated wire shelves.



EDM-17



EDM-17F




EDMD-23F




EDMD-49

OPTIONS & ACCESSORIES


Additional epoxy coated shelves / 2.5" Casters / 4" Casters / 6" Adjustable stainless steel legs / Factory reverse door hinging / 220V-50 cycles- 1 phase



MODEL	DOORS	CAPACITY (Cu.Ft)	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	Cord Length	Cabinet Dimensions			Shipping		
									W"	D"	H"	Wt. lbs.	Cubes	
REFRIGERATORS														
EDM-17	1	16'7	4	5.8	1/4	115/60/1	5-15P	8'	27	26 1/4	72 5/8	216	37	
EDMD-23	1	23	4	6.1	1/4	115/60/1	5-15P	8'	27	32	78 5/8	262	47	
EDMD-49	2	49	8	6.9	1/3	115/60/1	5-15P	8'	54	32	78 5/8	424	93	
FREEZERS														
EDM-17F	1	16	4	8.5	3/4	115/60/1	5-15P	8'	27	26 3/8	72 5/8	216	37	
EDMD-23F	1	23	4	8.8	3/4	115/60/1	5-15P	8'	27	32	78 5/8	262	47	

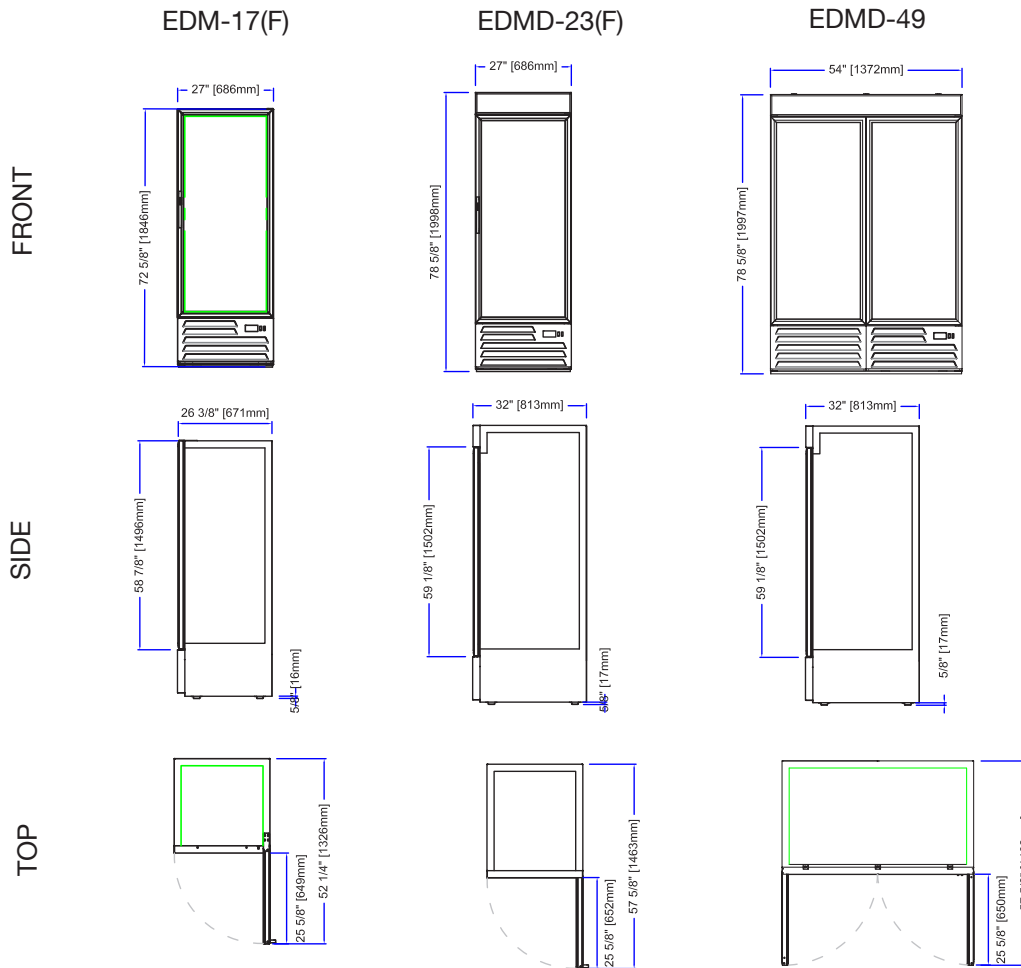

Specifications



CONSTRUCTION

- Our merchandisers boast a sturdy stainless steel floor and easy to clean, ETL approved white coated steel. walls Exterior is black (refrigerators) or white (freezers) laminated vinyl.
- "Low-E" consumption LED interior lights last up to 10 times longer compared to fluorescent light, providing greater visibility, shadow-free illumination and enhanced product display.

DOORS & SHELVES

- "Low E" double pane thermal insulate glass doors. Easy grip handles and self closing /90° stay open door feature.
- Adjustable epoxy coated wire shelves.

REFRIGERATION SYSTEM

- Factory engineered oversized and balanced refrigeration system. CFC-free R-134A refrigerators maintain temperature from 33° to 38°F and freezers maintain temperature from -8°F to -0°F.
- Bottom mount compressor allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment resulting in longer compressor life.
- Large fan motor and fan blades for better air circulation.

- Hot gas evaporator in drain pan for efficient condensation.
- Analog temperature control system for refrigerators and digital controller for freezers allows customers to maintain precision temperature.
- CFC-free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year:** Labor and parts warranty.
- **Five year:** Compressor warranty.
- **International:** One year, parts only.