



ITEM # .....

## Worktop Refrigerators & Freezers

- EDWR27-B • EDWR48-B • EDWR60-B • EDWR72-B
- EDWF27-B • EDWF48-B

### STANDARD FEATURES

#### ⌘ DURABLE STAINLESS STEEL

Our worktops boasts a sturdy stainless steel exterior and interior finish with a galvanized back panel provides strength and durability.

#### ⌘ ERGONOMICALLY DESIGNED SOLID DOORS

Standard doors come with easy grip handles and self closing and 120° stay open door feature, working together for customer convenience while ABS door lines provides thermal efficiency.

#### ⌘ MAGNETIC DOOR GASKET

One piece magnetic gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.

#### ⌘ HIGH DENSITY POLYURETHANE INSULATION

Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

#### ⌘ EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. R290 Hydrocarbon. Refrigerators maintain temperature from 33 °F to 38 °F and freezers maintain temperature from 0°F to -8°F.

#### ⌘ TEMPERATURE CONTROL

Analog thermostat for refrigerators and digital for freezers with automatic defrost.

#### ⌘ FRONT BREATHING

Allows unrestricted placement of the unit.

#### ⌘ COVERED CORNERS

Inside the cabinet to meet ETL requirements.

#### ⌘ 2 ADJUSTABLE WIRE SHELVERS PER DOOR

Heavy duty, epoxy coated.

#### HEAVY DUTY TOP WITH WELDED BACKSPASH.



EDWR27-B  
EDWF-27-B



EDWR60-B  
EDWF60-B



EDWR72-B

### ACCESSORIES


Additional epoxy coated shelves.




MODEL	DOORS	CAPACITY	SHELVES	AMPS.	HP	VOLTAGE	NEMA PLUG	CORD LENGTH	CABINET DIMENSIONS			SHIPPING	
									WIDTH	DEPTH	HEIGHT	WEIGHT	Ft <sup>3</sup>
<b>REFRIGERATORS</b>													
EDWR27-B	1	6.1	2	1.5	1/10	115/60/1	5-15P	8'	27"	30"	31"	204	21
EDWR48-B	2	11.8	4	2.5	1/3	115/60/1	5-15P	8'	48"	30"	31"	289	35
EDWR60-B	2	15.0	4	2.5	1/3	115/60/1	5-15P	8'	60"	30"	31"	343	47
EDWR72-B	3	18.2	6	3.0	1/3	115/60/1	5-15P	8'	72"	30"	31"	413	56
<b>FREEZERS</b>													
EDWF27-B	1	6.1	2	2.7	1/3	115/60/1	5-15P	8'	27"	30"	31"	214	21
EDWF48-B	2	11.8	4	6.5	1/2	115/60/1	5-15P	8'	48"	30"	31"	319	35

\*Depth does not include 1" rear bumper. \*\*Height does not include 6" overall for casters.


EDWR(F)27-B Top




EDWR(F)48 -B Top

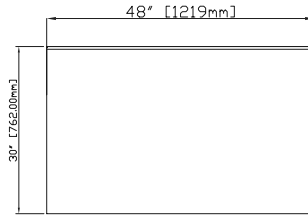


EDWR60-B Top

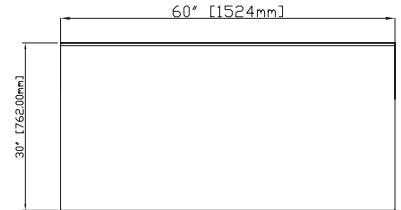


EDWR(F)27-B Front

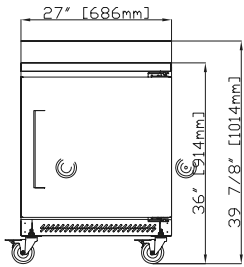


EDWR(F)48-B Front

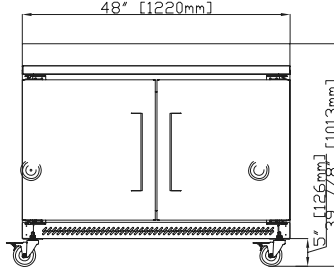


EDWR60-B Front

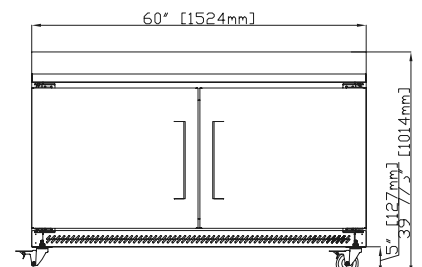


EDWR(F)72-B Top

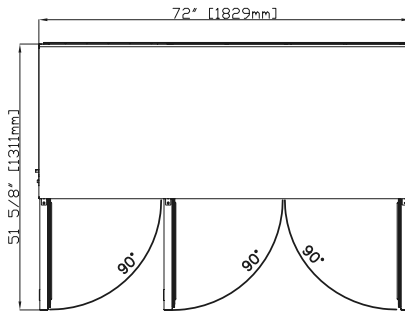

EDWR(F)72-B Front

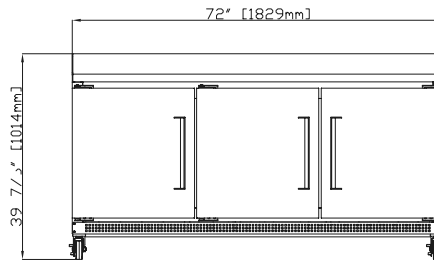

EDWR(F)-B Side Common View



## \* Specifications



### CABINET CONSTRUCTION

- Sturdy stainless steel exterior and interior finish with a galvanized back panel.
- Heavy duty top with welded back splash, one piece only.
- CABINET & DOOR : Entire foamed-in-place high-density, CFC-Free, polyurethane insulation. Covered corner floor to meet ETL requirements.
- CASTERS: 4" Diameter swivel casters, front two with brakes.
- SHELVES: 2 Adjustable heavy duty coated wire shelves per door

### REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Refrigerators maintain temperature from 33° to 38°F and R-404A freezers from -8°F to 0°F. Hot gas evaporator in drain
- Self-contained capillary tube system uses environmentally friendly refrigerant (CFC free)
- Front breathing allows unrestricted placement of the unit.
- Analog thermostat for refrigerators and digital for freezers with automatic defrost.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Access for the condensating unit behind the front grill, slides out for easy cleaning and maintenance.

### DOORS

- Stainless steel exterior with ABS interior liner.
- One piece construction magnetic gasket is removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

### ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.

### WARRANTY

Continental US & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.