

T

Mobile Enclosed Tray and Rack Dispensers

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- | | | | | | |
|----------|-----------|-----------|-------------------|------------|-------------------|
| • T-1014 | One stack | • T-1826 | One stack | • T-1418H | One stack, heated |
| • T-1216 | One stack | • T-2020 | One stack | • T-1422H | One stack, heated |
| • T-1221 | One stack | • T2-1014 | Two stack | • T-1826H | One stack, heated |
| • T-1418 | One stack | • T2-1216 | Two stack | • T-2020H | One stack, heated |
| • T-1422 | One stack | • T2-1221 | Two stack | • T2-1221H | Two stack, heated |
| • T-1622 | One stack | • T-1221H | One stack, heated | | |



T2-1216

Standard Features

T Series Only

- Cabinet top to be 16 gauge stainless steel, welded, polished and reinforced
- Cabinet sides to be 20 gauge stainless steel
- Cabinet bottom to be 14 gauge galvanized steel
- (4) 4.00" polyolefin swivel casters (all locking)
- Dispenser platform carrier shall be 18 gauge stainless steel and removable for cleaning
- Non-marring corner gray bumpers
- Self-leveling mechanisms shall be adjustable by adding and removing stainless steel extension springs located inside the elevator housing
- One year parts and 90 day labor standard warranty

T/T2-H Series Only

- Heated dispenser has a stainless steel liner and 2.00" of fiberglass insulation
- On/off switch and 9' cord and plug standard
- Dispenser is heated with convection heated modules
- Air intake is standard with filter

- Adjustable thermostat
- Temperature between 150-170°F (66-77°C)
- One year parts and 90 day labor warranty

Options & Accessories

- Flange-mount feet in lieu of casters
- Special tray & rack sizes
- Six, eight, or ten hole silverware bins with plastic or stainless steel cylinders
- Additional plastic or stainless steel silverware cylinders
- Wrap-around bumpers
- 4" or 5" polyurethane casters
- Laminate panels
- Special height

Specifications

Cabinet top shall be 16-gauge stainless steel with all corners welded, polished and reinforced with heavy-gauge channels. Cabinet exterior panels shall be 20-gauge stainless steel. Bottom shall be 14-gauge galvanized steel. Unit shall have (4) 4.00" (10cm) diameter polyolefin swivel casters (all locking), and non-marking gray bumpers at each corner.


Dispenser platform carrier shall be 18-gauge stainless steel and shall be removable for cleaning. Each dispenser shall be field adjustable by adding or removing stainless steel extension springs located inside the elevator housing.

The Following Applies To T/T2-H Heated Dispensers Only: Heated dispensers shall have a stainless steel liner separated from the outer panels by 2.00" (5cm) of fiberglass insulation.


Unit shall be supplied with 9' (2.7m) cord and plug as shown in the specifications table on reverse. Electrical connections shall be 120 volt, 60 hertz, and single phase.

Dispenser shall have one or two convection heating modules consisting of a single 700-watt heating element and fan motor, located in the center of the interior bottom cavity. (Heated T/ T2 models 1014-1422 shall have one module; larger models

have two modules.) Air intake shall have a filter. Dispenser shall have an adjustable thermostat and an ON/OFF switch on the side of the unit. Unit shall maintain a temperature between 150°F-170°F (66°C-77°C).



T: Mobile Enclosed Tray and Rack Dispensers

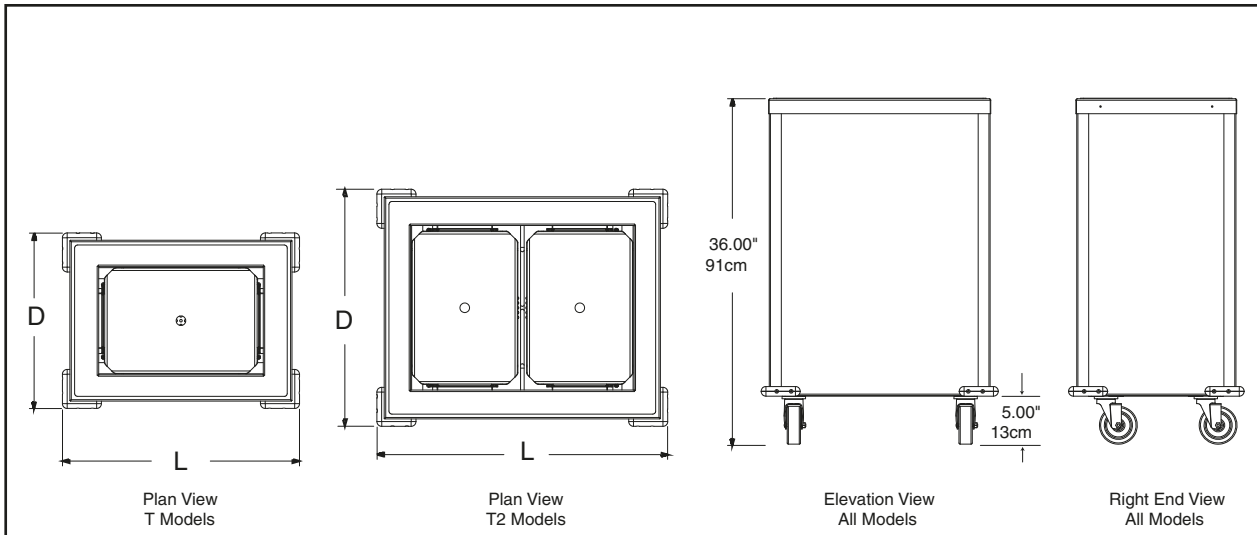

Specifications

Model	Length	Depth	Maximum Tray Size	Ship Weight	Amps	NEMA Plug
T-1014	24.87" (63cm)	18.50" (47cm)	10" x 15" (25cm x 38cm)	150lbs/68kg	NA	NA
T-1216	24.50" (62cm)	21.87" (56cm)	12" x 16" (30cm x 41cm)	153lbs/69kg	NA	NA
T-1221	29.50" (75cm)	21.87" (56cm)	12" x 21" (30cm x 53cm)	162lbs/74kg	NA	NA
T-1418	26.50" (67cm)	23.87" (61cm)	14" x 18" (36cm x 46cm)	153lbs/69kg	NA	NA
T-1422	30.50" (77cm)	23.87" (61cm)	14" x 22" (36cm x 56cm)	162lbs/74kg	NA	NA
T-1622	30.50" (77cm)	25.87" (66cm)	16" x 22" (41cm x 56cm)	177lbs/80kg	NA	NA
T-1826	34.50" (88cm)	27.87" (71cm)	18" x 26" (46cm x 66cm)	210lbs/95kg	NA	NA
T-2020	29.50" (75cm)	29.87" (76cm)	20" x 21" (51cm x 53cm)	175lbs/79kg	NA	NA
T2-1014	30.50" (77cm)	24.87" (63cm)	10" x 15" (25cm x 38cm)	177lbs/80kg	NA	NA
T2-1216	34.50" (88cm)	25.87" (66cm)	12" x 16" (30cm x 41cm)	177lbs/80kg	NA	NA
T2-1221	34.50" (88cm)	30.87" (78cm)	12" x 21" (30cm x 53cm)	185lbs/84kg	NA	NA
T-1221H	29.50" (75cm)	21.87" (56cm)	12" x 21" (30cm x 53cm)	127lbs/58kg	6.34	5-15P
T-1418H	26.50" (67cm)	23.87" (61cm)	14" x 18" (36cm x 46cm)	155lbs/70kg	6.34	5-15P
T-1422H	30.50" (77cm)	23.87" (61cm)	14" x 22" (36cm x 56cm)	155lbs/70kg	12.7	5-20P
T-1826H	34.50" (88cm)	27.87" (71cm)	18" x 26" (46cm x 66cm)	195lbs/89kg	12.7	5-20P
T-2020H	29.50" (75cm)	29.87" (76cm)	20" x 21" (51cm x 53cm)	185lbs/84kg	12.7	5-20P
T2-1221H	34.50" (88cm)	30.87" (78cm)	12" x 21" (30cm x 53cm)	185lbs/84kg	12.7	5-20P

- T2 models dispense two separate stacks of trays.
- T-H & T2-H models are 120 volt, 60 hertz, single phase, and include a 9' (2.7m) cord with plug.

Delfield reserves the right to make changes to the design or specifications without prior notice.