

# Master Electric Production Griddle

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

## Models

- ECG-36R
- ECG-48R
- ECG-60R
- ECG-72R



Model ECG-48R  
(Shown on optional stand)

## Standard Features

- Full-width front rail
- Rear grease trough with bottom drawer
- Three (3) flat bar heating elements, (4.3 kW total), per 12" (305mm) of griddle width
- 208 or 240 volt models
- Electric main on/off power switch w/ indicator light (green)
- On/off switch for each thermostat
- Electronic thermostat, (150°F/66°C - 450°F/232°C), for each 12" (305mm) heat zone
- "Heat-On" indicator light (amber)
- Stainless Steel sides
- Stainless steel front panel
- Stainless steel backguard
- Stainless steel grease trough
- Stainless steel side griddle splashguards
- Stainless steel 6" (152mm) deep, grease drawers with integral grease baffles. Capacity 1.6 gal/6 L.
- 6" (152mm) stainless steel adjustable legs
- Nickel-plated thermostat guards
- Eight-inch high backsplash
- Contoured grease chute opening
- 6' (1829mm) cord and plug standard on 36" - 48" 3-phase models

## Options & Accessories

- Other Non -CE agency approved voltages available, (220/240V/50Hz), upon request, direct connection to junction box is required. Contact factory for options
- 10-1/2" (266mm) deep grease drawers, no charge (stand models only). 1.4 gal/5.25 L
- Protective shield for controls
- All stainless steel open stand, 30.292" (769mm) high with bottom shelf on adjustable legs or casters


## Specifications

Heavy-duty electric griddles, available in four sizes, 36", 48", 60" & 72" wide. High performance, volume production with even, consistent, controlled temperatures One-inch (25mm) thick griddle plate. Electronic thermostat with embedded sensor and three efficient flat bar heating elements per 12" (305mm) of griddle width. All stainless steel exterior. Full-width front rail, high capacity, sloped bottom grease drawers. 6" (152mm) legs standard, or optional stand.

NOTE: Griddles supplied with casters must be installed with an approved restraining device.



Master Electric Production Griddle

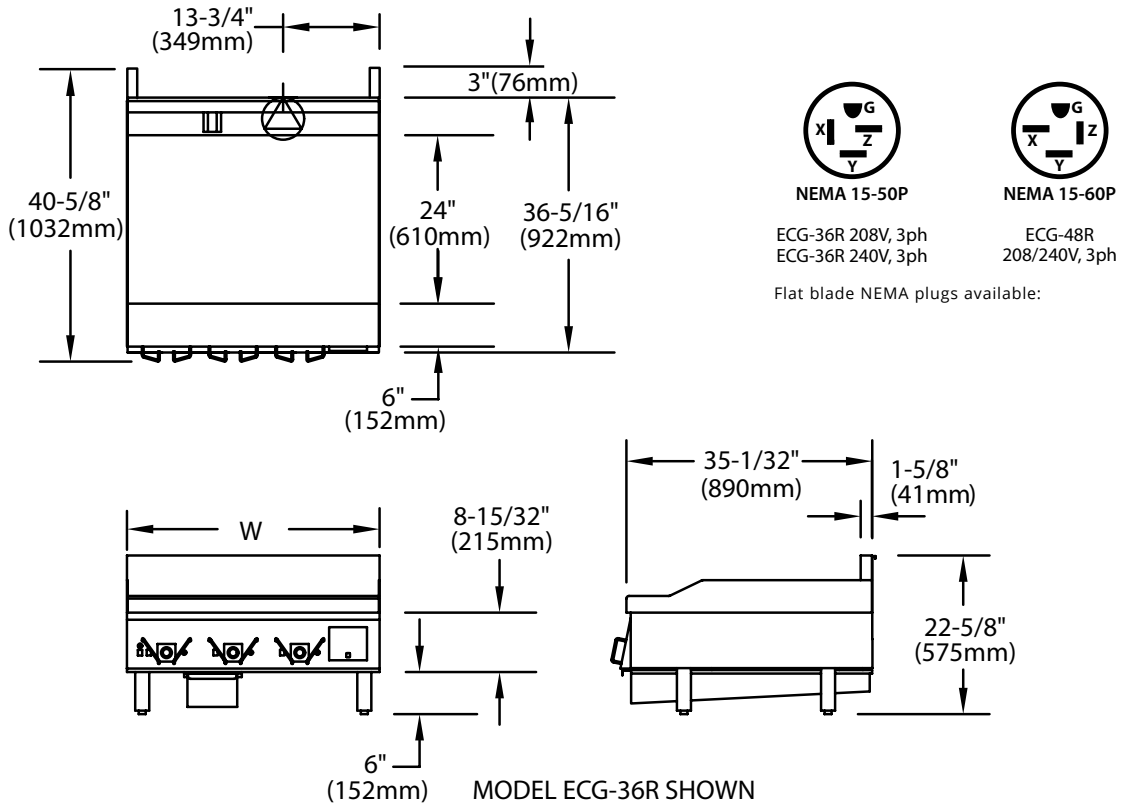

Model	Width (W)	Voltage	Total kW Load	Load Per Phase			Amps Per Phase			Amps 1 phase	Shipping Wt.
				X-Y	X-Z	Y-Z	X	Y	Z		
ECG-36R	36" (914mm)	208.0	12.90	4.30	4.30	4.30	35.8	35.8	35.8	62.0	400 lbs. (181 kg)
		240.0	12.90	4.30	4.30	4.30	31.0	31.0	31.0	53.8	
ECG-48R	48" (1219mm)	208.0	17.20	5.60	6.00	5.60	48.3	46.6	48.3	82.7	500 lbs. (227 kg)
		240.0	17.20	5.60	6.00	5.60	41.9	40.4	41.9	71.7	
ECG-60R	60" (1524mm)	208.0	21.50	6.90	7.30	7.30	59.1	59.1	60.8	103.4	600 lbs. (277 kg)
		240.0	21.50	6.90	7.30	7.30	51.2	51.2	52.7	89.6	
ECG-72R	72" (1929mm)	208.0	25.80	8.60	8.60	8.60	71.6	71.6	71.6	124.0	700 lbs. (318 kg)
		240.0	25.89	8.60	8.60	8.60	62.1	62.1	62.1	107.5	

Clearances			
Installation		Entry	
Sides	Back	Crated	Uncrated
6" (152mm)	6" (152mm)	40" (1016mm)	38" (965mm)

Welbilt reserves the right to make changes to the design or specifications without prior notice.