



# SINGLE OVERHEAD CALROD WARMERS

MODELS: FD, FDL



APW Wyott Single Overhead Calrod Warmers provide a streamlined option for warming prepared food on the cookline. Our standard warmers deliver 22% more heat to food than competitive models, while our high watt models deliver 15% more power than competitive models.

The FD and FDL warmers are available in a wide range of lengths, with or without lighting, toggle switch, or infinite control with the option for remote on/off.

## OPTIONS & ACCESSORIES

- Remote control box with pilot light switch box, control and cover with single, dual, or triple controls
- Tubular stand kit with 1 pair legs for permanent mounting (48" or smaller units only)
- Portable leg kit with 1 pair legs and accessories for freestanding operation
- Cord & plug set for portability, includes adapter bushing. (120V units, 48" and smaller only)
- Chain supports for overhead suspension without flush mount

## FEATURES AT A GLANCE

- Delivers over 22% more heat to your prepared food than competitive models
- Unique heating system provides the highest wattage in the category. High watt version has 15% more power than competition
- Aluminized steel reflectors behind heating elements radiate more heat toward food
- Stainless steel construction resists corrosion, is easy to clean, and presents an attractive appearance
- Control components are insulated in a ventilated box
- All units come standard with sturdy stainless steel mounting brackets
- Select how to support your overhead warmer with leg stands, tubular post mount stand, or chain suspension
- Extra electrical conduit knockout locations allow flexibility in installation
- Available with either an infinite or toggle control that can be supplied within the unit or in a remote control box. Installer provides wiring between remote control box and unit.
- Available in either high or low wattage.

## CERTIFICATIONS

Certified by the following agencies:




## WARRANTY

APW Wyott overhead warming equipment is backed by a 2 year warranty on heating elements and a 1 year parts and labor warranty



#### EQUIPMENT DIMENSIONS

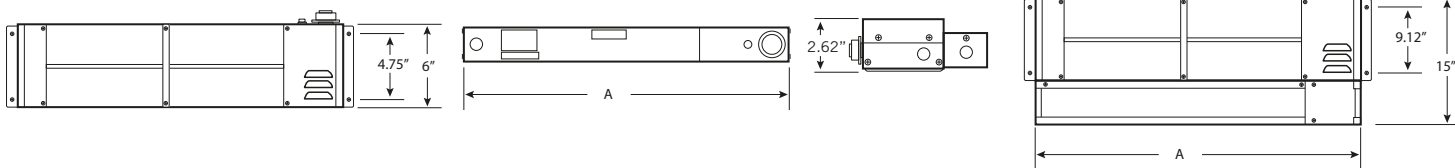

#### MECHANICAL SPECIFICATIONS

Model #	Width	Watts	Overall Dimensions Width (A) x Height* x Depth**	Ship Weight	Model #	Width	Watts	Overall Dimensions Width (A) x Height* x Depth**	Ship Weight
FD - High Wattage Non-Lighted	18"	400	19.55" x 3.5" x 6"	7 lbs.	FDL - High Wattage Lighted	18"	480	19.55" x 3.5" x 9.125"	7 lbs.
	24"	575	25.55" x 3.5" x 6"	7 lbs.		24"	655	25.55" x 3.5" x 9.125"	8 lbs.
	30"	760	31.55" x 3.5" x 6"	8 lbs.		30"	840	31.55" x 3.5" x 9.125"	9 lbs.
	36"	920	37.55" x 3.5" x 6"	9 lbs.		36"	1,080	37.55" x 3.5" x 9.125"	11 lbs.
	42"	1,100	43.55" x 3.5" x 6"	12 lbs.		42"	1,260	43.55" x 3.5" x 9.125"	12 lbs.
	48"	1,265	49.55" x 3.5" x 6"	12 lbs.		48"	1,425	49.55" x 3.5" x 9.125"	12 lbs.
	54"	1,425	55.55" x 3.5" x 6"	13 lbs.		54"	1,585	55.55" x 3.5" x 9.125"	14 lbs.
	60"	1,610	61.55" x 3.5" x 6"	14 lbs.		60"	1,850	61.55" x 3.5" x 9.125"	15 lbs.
	66"	1,800 <sup>†</sup>	67.55" x 3.5" x 6"	16 lbs.		66"	2,040 <sup>†</sup>	67.55" x 3.5" x 9.125"	17 lbs.
	72"	1,980 <sup>†</sup>	73.55" x 3.5" x 6"	17 lbs.		72"	2,220 <sup>†</sup>	73.55" x 3.5" x 9.125"	18 lbs.
FD - Low Wattage Non-Lighted	18"	250	19.55" x 3.5" x 6"	7 lbs.	FDL - Low Wattage Lighted	18"	330	19.55" x 3.5" x 9.125"	6 lbs.
	24"	350	25.55" x 3.5" x 6"	7 lbs.		24"	430	25.55" x 3.5" x 9.125"	8 lbs.
	30"	450	31.55" x 3.5" x 6"	8 lbs.		30"	530	31.55" x 3.5" x 9.125"	9 lbs.
	36"	575	37.55" x 3.5" x 6"	9 lbs.		36"	735	37.55" x 3.5" x 9.125"	11 lbs.
	42"	675	43.55" x 3.5" x 6"	12 lbs.		42"	835	43.55" x 3.5" x 9.125"	12 lbs.
	48"	800	49.55" x 3.5" x 6"	12 lbs.		48"	960	49.55" x 3.5" x 9.125"	12 lbs.
	54"	925	55.55" x 3.5" x 6"	13 lbs.		54"	1,085	55.55" x 3.5" x 9.125"	14 lbs.
	60"	1,050	61.55" x 3.5" x 6"	14 lbs.		60"	1,290	61.55" x 3.5" x 9.125"	15 lbs.
	66"	1,160 <sup>†</sup>	67.55" x 3.5" x 6"	16 lbs.		66"	1,400 <sup>†</sup>	67.55" x 3.5" x 9.125"	17 lbs.
	72"	1,275 <sup>†</sup>	73.55" x 3.5" x 6"	17 lbs.		72"	1,515 <sup>†</sup>	73.55" x 3.5" x 9.125"	18 lbs.


\*Height includes 1" mounting bracket. Depth does not include toggle switch, infinite control, or remote box depth. † Sizes above 60" are only available in 208/240V versions.

#### REQUIRED CLEARANCES

	Combustible
Top	1" (25 mm)
Sides	2" (51 mm)
Back	2" (51 mm)

#### ELECTRICAL INFORMATION

Specify voltage and wattage; also, infinite control or toggle switch (remote control units that are operated by optional remote control kits). Remote control units use separate/optional remote control kits to allow for maximum installation flexibility. Up to 3 remote units can be controlled by a single triple remote control kit. Sizes above 60" are only available in 208/240V versions.



Freight Class: 100 Sizes 60" and above  
ship LTL only FOB: Smithville, 37166

APW Wyott reserves the right to modify specifications or discontinue models  
without incurring obligation. Dimensions nominal.