		Project Name:		AIA#	AIA#:	
	Model #:		Location:			
_		Iten	n #:	Quantity:		



NEW!

# **Power Drive Units**

## More Power, More Versatility!

Chop, grate, shred, slice and tenderize! Globe Power Drive Units boost food prep productivity with a heavy-duty 1 HP motor and an industry standard #12 attachment hub.











#### Models

- GPD-L 200 RPMs
- ☐ GPD-H 700 RPMs

### **Standard Features**

- Powerful 1 HP fan-cooled motor
- Industry standard #12 Attachment Hub
- Brushed stainless steel construction with onepiece cast hub face
- Interlocked power switch prevents inadvertent operation
- #12 attachment coupler built into shaft
- Overload protection with manual reset button
- Non-scratch, non-slip feet

## Warranty


1-year parts and labor warranty


## **Optional Accessories/Attachments**

- XVSGH 9" slicer/shredder/grater housing
- XASP Adjustable slicing plate (vegetables only)
- XPH Plate holder (requires plate below) Shredder/Grater plates:
  - ☐ **XSP332** 3/32" (2.3 mm) shredding plate
  - □ **XSP316** 3/16" (4.7 mm) shredding plate
  - □ XSP14 1/4" (6.3 mm) shredding plate
  - □ **XSP516** 5/16" (7.9 mm) shredding plate
  - □ XSP12 1/2" (2.3 mm) shredding plate
  - □ **XGP** grating plate
- XMCA-SS Meat Grinder Assembly (GPD-L only) Grinding plates:
  - □ **L00772** 1/16" (2 mm) plate
  - □ **L00668** 5/32" (4 mm) plate
- □ **L00439** 1/4" (6 mm) plate
- □ **L00669** 5/16" (8 mm) plate
- □ **L00773** 3/8" (10 mm) plate
- □ **L00774** 1/2" (12 mm) plate □ **L00775** 9/16" (14 mm) plate
- □ **L00776** 5/8" (16 mm) plate
- □ **L00777** stuffing plate *Must be used with stuffing*
- tube when stuffing sausage casings

To select options see back

Approved by:	Date:
· · · · · · · · · · · · · · · · · · ·	-



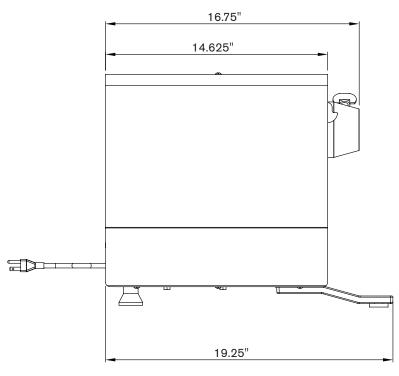

SPECIFICATIONS							
Model	RPMs	Motor	Amps	Volts	Capacity per Minute		
Model					Ground Beef	Parmesan Cheese	Lettuce
GPD-L	200	1 HP	5	115 V / 60 Hz	1 lb.	.67 lb.	7 lbs.
GPD-H*	700	1 HP	5	115 V / 60 Hz	Not recommended	1.5 lb.	10.35 lbs.

<sup>\*</sup>High speed model not recommended for grinding meat

Cord & Plug: Attached 6 foot flexible 3-wire cord with molded plug fits a grounded receptacle. NEMA 5-15 ( )



DIMENSIC	ONS   SHIPPING INFORMATION						
Item ships in I	Item ships in reinforced box. GPD-L Freight Class 65 / GPD-H Freight Class 70						
Model	Overall Dimensions	Net Weight	Shipping Dimensions	Shipping Weight			
GPD-L	9.875" W x 19.25" D x 15.56" H (25.1 cm x 48.9 cm x 39.5 cm)	79 lbs. (36 kg)	14" W x 22.75" D x 19" H (36.6 cm x 57.8 cm x 48.3cm)	85 lbs. (38.5 kg)			
GPD-H	9.875" W x 19.25" D x 15.56" H (25.1 cm x 48.9 cm x 39.5 cm)	72 lbs. (33 kg)	14" W x 22.75" D x 19" H (36.6 cm x 57.8 cm x 48.3cm)	77 lbs. (34.9 kg)			

Globe Power Drive Units constructed of stainless steel with one-piece cast hub. Power Drive Units have 1 HP fan cooled motors with overload protection and manual reset. #12 attachment hub with coupler built into shaft. Interlocked power switch prevents inadvertent operation. Non-slip, non-scratch feet. Units are CSA design certified, NSF and cETLus listed. One-year parts and labor warranty.

#### **OPTIONAL/ADDITIONAL ACCESSORIES** ■ XVSGH 9" Slicer/Shredder/Grater Housing ■ XASP Adjustable Slicing Plate (vegetables only) **XPH** Plate Holder Shredder/Grater plates:

☐ **XSP332** 3/32" (2.3 mm) shredding plate

☐ **XSP316** 3/16" (4.7 mm) shredding plate

☐ XSP14 1/4" (6.3 mm) shredding plate

☐ XSP516	5/16"	(7.9)	mm)	shredding	plate

☐ XSP12 1/2" (2.3 mm) shredding plate

☐ **XGP** grating plate ■ XMCA-SS Meat Grinder Assembly (GPD-L only)

**Grinding plates:** 

□ **L00772** 1/16" (2 mm) plate □ **L00668** 5/32" (4 mm) plate □ L00439 1/4" (6 mm) plate

□ **L00669** 5/16" (8 mm) plate

□ **L00773** 3/8" (10 mm) plate □ L00774 1/2" (12 mm) plate

□ **L00775** 9/16" (14 mm) plate

□ **L00776** 5/8" (16 mm) plate

□ **L00777** stuffing plate *Must be used with* stuffing tube when stuffing sausage casings

2153 Dryden Rd., Dayton, OH 45439 937-299-5493 | 800-347-5423 | Fax: 937-299-4147 | www.globefoodequip.com