



18600BSTMP

Self-Contained Refrigerated Work Tables With Backsplash

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

18600BSTMP

Models

- 18648BSTMP 48" Worktop Refrigerator with 4" Backsplash
- 18660BSTMP 60" Worktop Refrigerator with 4" Backsplash
- 18672BSTMP 72" Worktop Refrigerator with 4" Backsplash
- 18691BSTMP 91" Worktop Refrigerator with 4" Backsplash
- 18699BSTMP 99" Worktop Refrigerator with 4" Backsplash
- 186114BSTMP 114" Worktop Refrigerator with 4" Backsplash



18600BSTMP

Standard Features

- Stainless steel exterior is standard
- Compressor is located on right
- Finished stainless steel ends
- Stainless steel top
- 4" high backsplash
- Environmentally friendly R290 refrigerant
- Standard on casters
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Electronic Control
- Three year parts and labor warranty and an additional two year compressor parts warranty

Options & Accessories

- Laminate facing (full front)
- Laminate end
- Laminate back
- Tray racks
- Cutting board (20" wide x .5" thick)
- 18" deep single tier stainless steel overself
- Refrigerated drawers
- Lock
- 4" casters
- 6" legs
- Additional shelf (specify door size)
- Celsius readout for electronic control

Specifications

Exterior Top: Constructed of heavy duty stainless steel, with integral 2.12" (5cm) high square nosing at the front. Top is insulated with high-density insulation. Exterior back and bottom are galvanized steel. Exterior ends are finished with stainless steel.

Interior base has stainless steel back and bottom. Interior ends and door frames are thermoformed ABS plastic. Base is insulated with high-density foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Each interior door section has (1) removable epoxy-coated wire shelf.

Door(s) have stainless steel exterior front, with a thermoformed ABS plastic interior liner. Black recessed handle(s) and a snap-in magnetic gasket which is readily replaceable.

Base has a machine compartment, standard on right, with a condensing unit with condensate evaporator and an electrical junction box installed. Machine

compartment has a removable louver for access to condensing unit. Blower coil(s) with expansion valve are located behind the door mullions.

Refrigeration System: R290 refrigerant, and maintains 36°F (2°C) to 40°F (4°C) interior cabinet temperature. Interior cabinet is cooled with mullion style blower coils (coated) with expansion valves mounted between each door/drawer section for even air and temperature control.

Electronic temperature controls and pre-wired condensing unit with hot gas condensate evaporator are installed in the machine compartment. Electronic control for base reads air temperature. On/Off switches for base are located behind the louvered panel.

Electrical Connections: 115 volts, 60 Hertz, single phase. Unit has a 8' (2.4m) long cord and plug.

Casters: Unit is mounted on 5" (13cm) diameter casters; overall height of casters is 6.13" (16cm).



R290



18600BSTMP





18648BSTMP



18660BSTMP

31.50in
[80.01cm]





18672BSTMP



18691BSTMP


31.50in
[80.01cm]

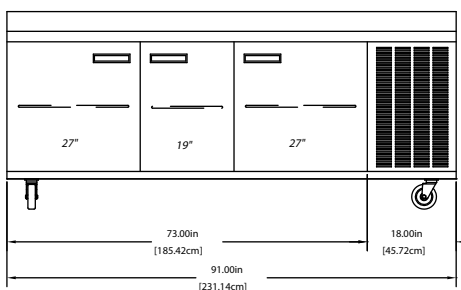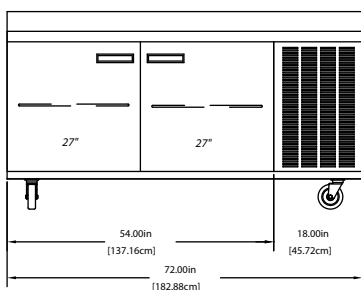



18600BSTMP



18699BSTMP


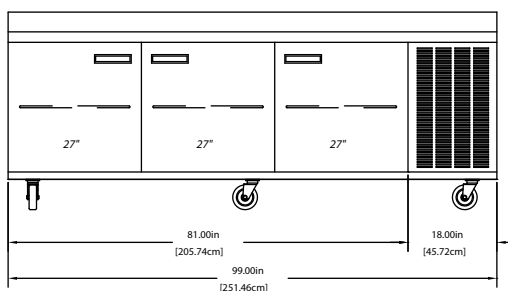


186114BSTMP

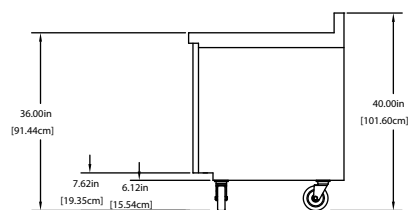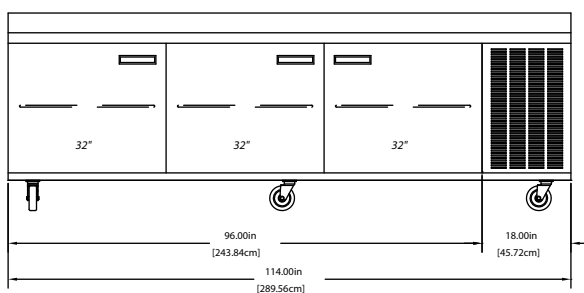


TYPICAL END

Mechanical Data



Door Swing

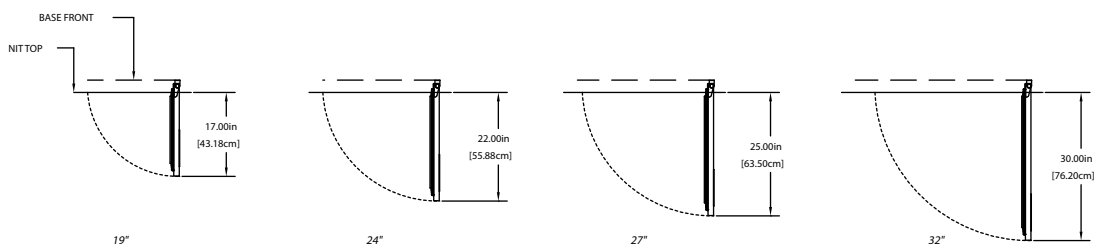

18600BSTMP

Specifications

Model	Number of Doors	Shelf Area	Volume	BTU Load Base/Heat of Rejection	BTU Sys. Cap Base @ 100F	H.P.	V/Hz/Ph	Amps	Nema Plug	Ship Weight	Energy KWH/Day
18648BSTMP	(1) 27"	3.95	10.25	384	1550	0.20	115/60/1	2.9	5-15P	390lbs/177kg	1.07
18660BSTMP	(1) 19" & (1) 27"	6.51	15.1	456	1550	0.20	115/60/1	2.9	5-15P	435lbs/197kg	1.2
18672BSTMP	(2) 27"	7.9	18.04	501	1550	0.20	115/60/1	4.8	5-15P	495lbs/225kg	1.47
18691BSTMP	(2) 27" & (1) 19"	10.29	24.44	726	2440	0.25	115/60/1	4.8	5-15P	535lbs/243kg	2.01
18699BSTMP	(3) 27"	11.85	27.31	771	2440	0.25	115/60/1	4.8	5-15P	594lbs/269kg	2.1
186114BSTMP	(3) 32"	14.46	33	854	2936	0.33	115/60/1	6.3	5-15P	685lbs/310kg	2.68

Welbilt reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
5517A_DEL_18BSTMP
03/17

