

8100-EFP

Drop-In Self-Contained LiquiTec™ Refrigerated Cold Pans

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- 8118-EFP One 12" x 20" pan capacity
- 8132-EFP Two 12" x 20" pan capacity
- 8145-EFP Three 12" x 20" pan capacity
- 8159-EFP Four 12" x 20" pan capacity
- 8172-EFP Five 12" x 20" pan capacity
- 8186-EFP Six 12" x 20" pan capacity



8159-EFP

Standard Features

- Stainless steel top construction
- LiquiTec® cold pans with eutectic fluid technology
- Flush mounted 12" x 20" individual stainless steel wells
- Standard 1/2" stainless steel drains with manifold
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation throughout unit
- Electronic temperature control and expansion valve standard
- Non-marring press fit top gasket
- Environmentally friendly R290 refrigerant
- 8' cord and plug
- Stainless steel louver for field installation
- 1 year parts and labor standard warranty

Options & Accessories

- Single or double service flip-up sneezeguards
- Relocate compressor
- Drain valve
- 220V/50 cycle electrical available in 404a custom sku# version

* Inclusion of this option will alter electrical specifications of the unit

Specifications

LiquiTec™ Cold Pans with Eutectic Fluid technology allows food in food pans to be flush with top of counter. Cold pan meets NSF standard 7; and can be dropped into Delfield Mark 7, Shelleyglas® or Shelleysteel™ counters or existing counters.

Top: is one-piece stainless steel, with 0.62" (1.6cm) overhang around perimeter and die stamped 19.87" x 11.87" (50cm x 30cm) openings with depressed edges. Formed well below each opening is 6.25" (16cm) deep with 0.5" (1.3cm) stainless steel drain and copper manifold. Each well, flush with the top, for flush mount pans to accommodate 12" x 20" (30cm x 51cm) pans 4" (10cm) or 6" (15cm) deep supplied by others. Product temperatures of 33°F (1°C) to 41°F (5°C) are maintained at 86°F (30°C) ambient room temperature, meeting NSF 7 requirements.

Sides and bottom: are insulated with high-density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) closed-cell polyurethane. Exterior housing is galvanized steel.

Refrigeration: system uses R290 refrigerant. Eutectic fluid is used as the heat transfer medium. Condensing unit is suspended below the cold pan on a steel frame. Electronic temperature control.

A stainless steel louver is provided for field installation; cutout dimension is 12" x 23.5" (32cm x 60cm).


Electrical system is 115V/60Hz/1Ph with NEMA 5-15P plug.



8100-EFP: Drop-In Self-Contained LiquiTec™ Refrigerated Cold Pans

8100-EFP

Drop-In Self-Contained LiquiTec™ Refrigerated Cold Pans

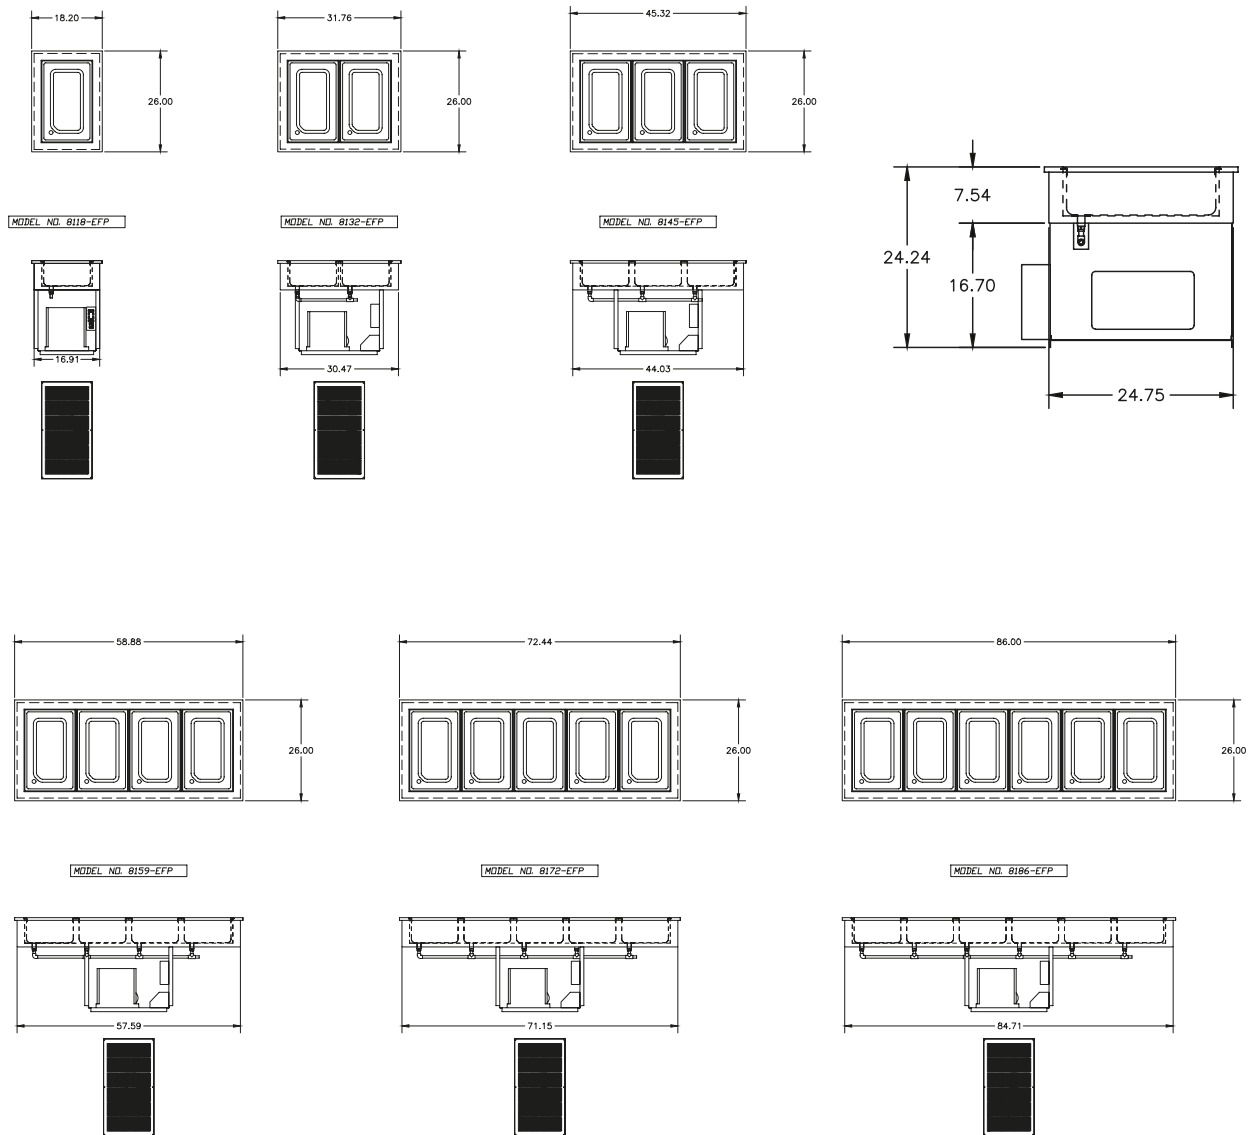

Model	Counter Cutout Dimensions	12"x20" Pan Capacity	V/Hz/Ph	Amps	H.P.	Nema Plug	BTU Load	System Capacity	Ship Weight
8118-EFP	17.00" X 25.00" (43cm X 64cm)	1	115/60/1	2.4	1/5	5-15P	218	576	180lbs/82kg
8132-EFP	30.75" x 25.00" (78cm x 64cm)	2	115/60/1	2.4	1/5	5-15P	408	856	225lbs/103kg
8145-EFP	44.25" x 25.00" (112cm x 64cm)	3	115/60/1	3.7	1/4	5-15P	598	1254	235lbs/107kg
8159-EFP	57.87" x 25.00" (147cm x 64cm)	4	115/60/1	3.7	1/4	5-15P	788	1462	285lbs/130kg
8172-EFP	71.50" x 25.00" (182cm x 64cm)	5	115/60/1	4.8	1/3	5-15P	979	1985	295lbs/134kg
8186-EFP	85.00" x 25.00" (216cm x 64cm)	6	115/60/1	4.8	1/3	5-15P	1169	2162	306lbs/139kg

Welbilt reserves the right to make changes to the design or specifications without prior notice.