

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

GAFRIP Roll-Ins

Specification Line® Roll-In Freezer

Models

☐ GAFRI1P-S ☐ GAFRI2P-S


GAFRI1P-S

Standard Features

- GreenGenius™ R290 top mount refrigeration system featuring TXV expansion valve and hot gas condensate removal
- easyTouch Control with remote monitoring capability
- Digital exterior temperature display with high/low temp visual alarms
- Energy saving LED interior light
- Raised ABS interior door liner
- Smart door hinge that auto closes up to 90° and stays open past 90°
- Energy efficient door gasket – removable without tools
- Door locks
- Includes 14 GA s/s ramp 1" tall with a 10 degree slope
- 10' cord and plug attached
- Stainless steel exterior front, sides & interior
- 115V / 60C / 1 P Standard
- Three year parts and labor warranty and an additional 2 year compressor parts warranty.

Options & Accessories

- S/S finish door liner
- Stainless steel back
- Laminate – front, ends, shroud
- Heat shield end – max temp 400 degrees
- Trim strips
- Flat ramp

Specifications


Refrigeration system: All components are mounted to the top cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R290 refrigerant is used. System has the capability of maintaining between -5°F and 0°F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve. System is controlled using an electronic temperature control, which provides improved pull down times, reducing compressor cycling and longer compressor life with lower energy consumption. Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

Units are completely insulated with high density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.



R290

GAFRIP Roll-Ins

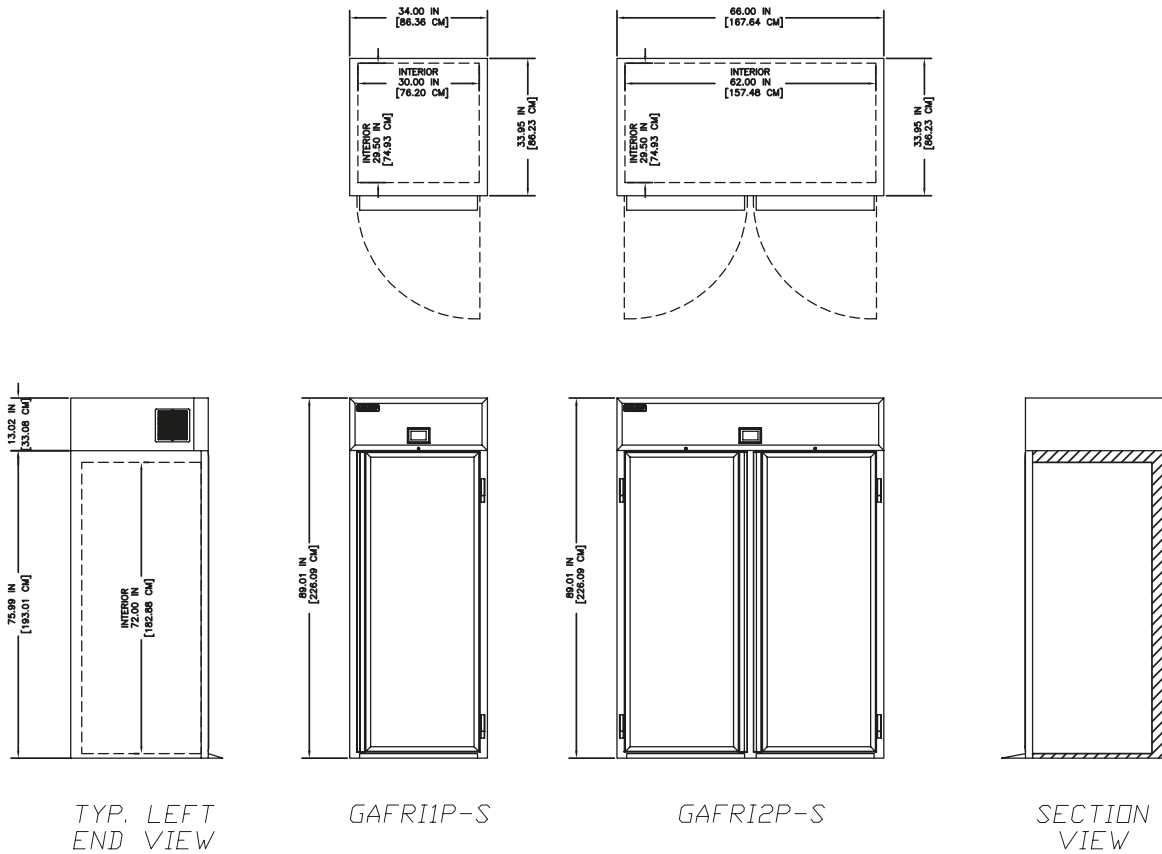

Note: roll-in door openings are 28.28" wide by 72.30" high

Specifications									
Model	V/Hz/Ph	Amps	Volume Cu. Ft.	SHELF CAPACITY SQ. FT.	No. of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug
GAFRI1P-S	115/60/1	10	37	N/A	N/A	0.68	2194	466	5-15P
GAFRI2P-S	115/60/1	14.7	76.5	N/A	N/A	(2X)0.55	3936	690	5-20P

Welbilt reserves the right to make changes to the design or specifications without prior notice.