

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

# GAHRI Roll-Ins

## Specification Line® Heated Roll-In

### Models

☐ GAHRI1-S

☐ GAHRI2-S


GAHRI1-S

### Standard Features

- easyTouch Control with remote monitoring capability
- Digital exterior temperature display with high/low temp visual alarms
- Raised ABS interior door liner
- Smart door hinge that auto closes up to 90° and stays open past 90°
- Energy efficient door gasket – removable without tools
- Door locks
- Includes 14 GA s/s ramp 1" tall with a 10 degree slope
- Stainless steel interior door liner
- 40 watt incandescent light
- 10' cord and plug attached
- Stainless steel exterior front, sides & interior
- 208V / 60C / 1 P Standard
- Three year parts and labor warranty

### Options & Accessories


- S/S finish door liner
- Stainless steel back
- Laminate – front, ends, shroud
- Heat shield end – max temp 400 degrees
- Trim strips

### Specifications

**Heating system:** Cabinets are designed to maintain temperatures between 120°F and 200°F. Heating elements are located behind the vertical ducts. The design of the heater, which is full length of the vertical duct, allows for optimal air flow and energy efficiency. Fan motor is mounted outside of the heated compartment. System is controlled using an electronic temperature control.

Units are completely insulated with high density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.



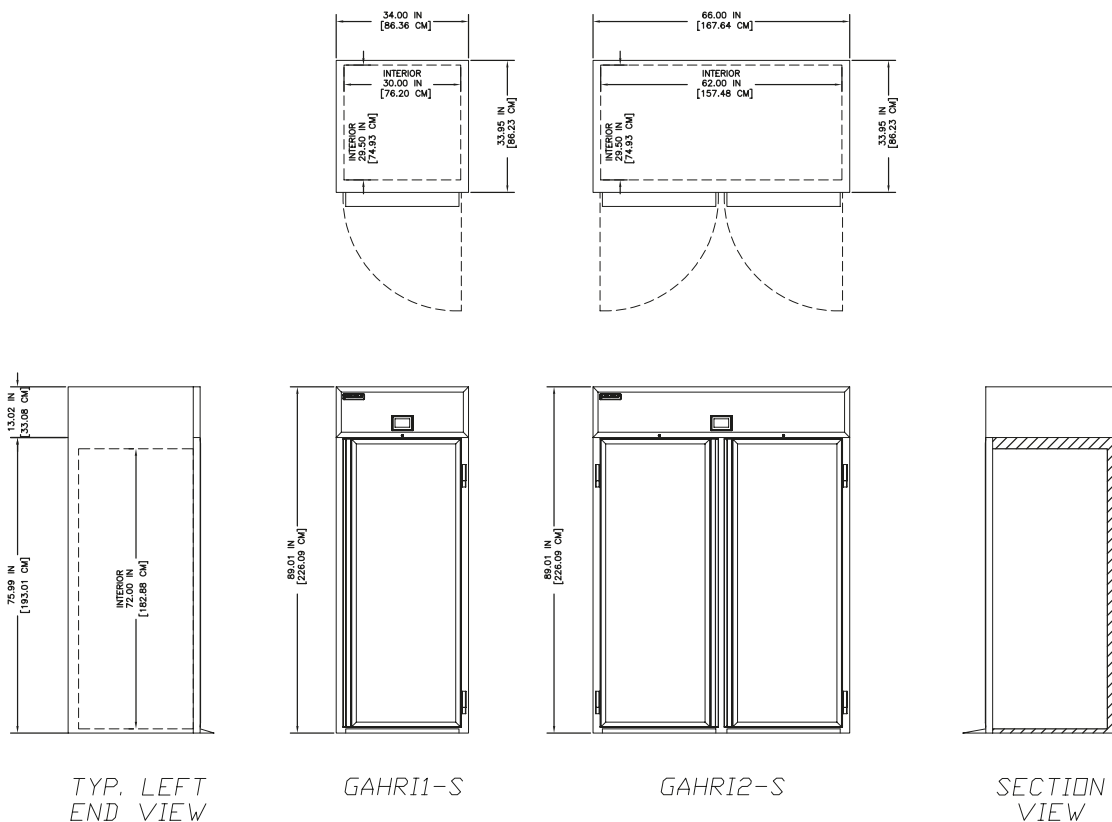

**Note:** roll-in door openings are 28.28" wide by 72.30" high

## GAHRI Roll-Ins

Specifications								
Model	V/Hz/Ph	Amps	Volume Cu. Ft.	SHELF CAPACITY SQ. FT.	No. of Shelves	Unit H.P.	Ship Weight	Nema Plug
GAHRI1-S	208-240/60/1	6	37	N/A	N/A	N/A	446	6-20P
GAHRI2-S	208-240/60/1	10.5	76.5	N/A	N/A	N/A	715	6-20P

Welbilt reserves the right to make changes to the design or specifications without prior notice.