

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

# GARRIP Roll-Ins

Specification Line® Roll-In Refrigerators w/Glass Doors

## Models

☐ GARRI1P-G ☐ GARRI2P-G



GARRI1P-G

## Standard Features

- GreenGenius™ R290 top mount refrigeration system featuring TXV expansion valve and hot gas condensate removal
- easyTouch Control with remote monitoring capability
- Digital exterior temperature display with high/low temp visual alarms
- Energy saving LED interior light
- Smart door hinge that auto closes up to 90° and stays open past 90°
- Energy efficient door gasket – removable without tools
- Door locks
- Includes 14 GA s/s ramp 1" tall with a 10 degree slope
- 10' cord and plug attached
- Stainless steel exterior front, sides & interior
- 115V / 60C / 1 P Standard
- Three year parts and labor warranty and an additional 2 year compressor parts warranty.

## Options & Accessories

- Stainless steel back
- Laminate – front, ends, shroud
- Heat shield end – max temp 400 degrees
- Trim strips
- Flat ramp

## Specifications


**Refrigeration system:** All components are mounted to the top cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R290 refrigerant is used. System has the capability of maintaining between 33°F and 40°F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve. System is controlled using an electronic temperature control, which provides improved pull down times, reducing compressor cycling and longer compressor life with lower energy consumption. Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

Units are completely insulated with high density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.



R290



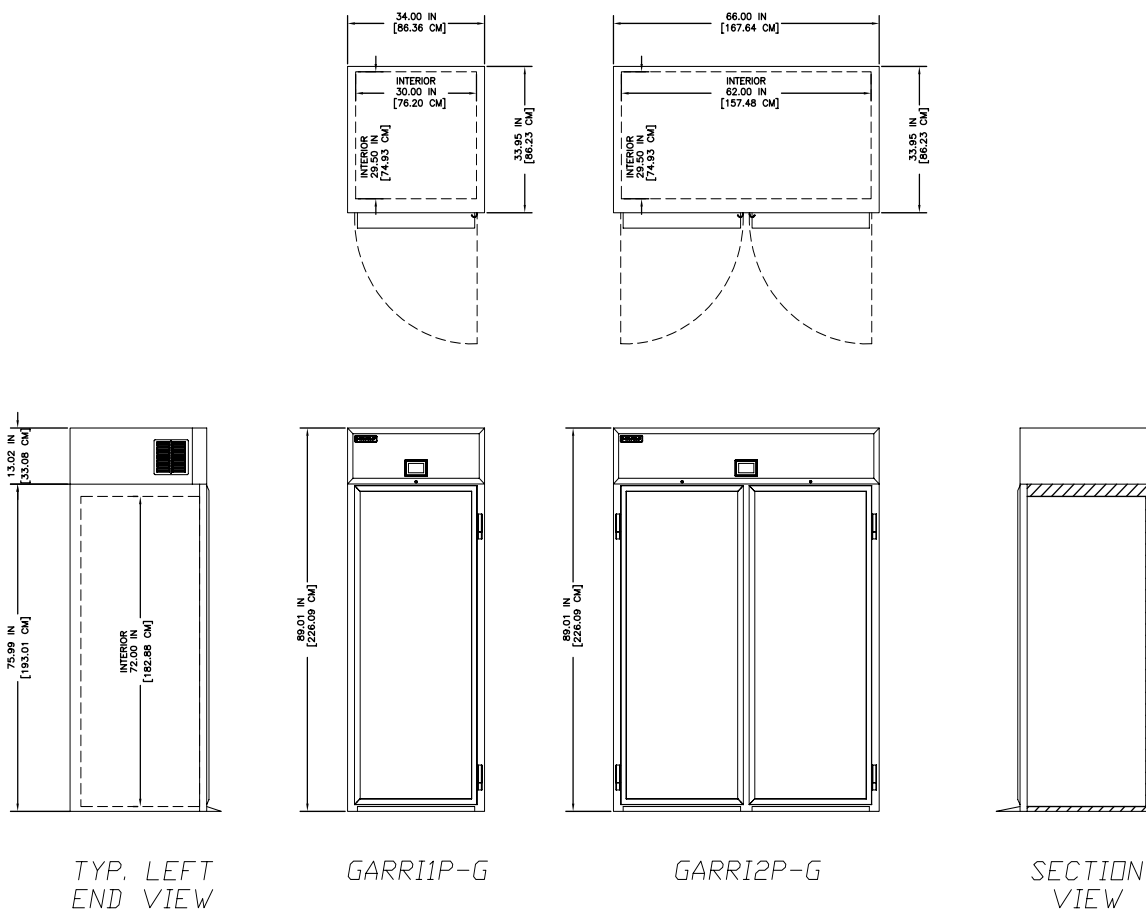

| Specifications |          |      |                |                        |                |           |                   |             |           |
|----------------|----------|------|----------------|------------------------|----------------|-----------|-------------------|-------------|-----------|
| Model          | V/Hz/Ph  | Amps | Volume Cu. Ft. | SHELF CAPACITY SQ. FT. | No. of Shelves | Unit H.P. | Btu/Hr System Cap | Ship Weight | Nema Plug |
| GARRI1P-G      | 115/60/1 | 6    | 37             | N/A                    | N/A            | 0.35      | 2385              | 486         | 5-15P     |
| GARRI2P-G      | 115/60/1 | 6.5  | 76.5           | N/A                    | N/A            | 0.38      | 3320              | 745         | 5-15P     |

Welbilt reserves the right to make changes to the design or specifications without prior notice.