
HEAVY DUTY COOKING

VULCAN

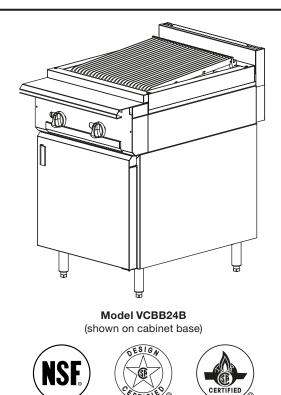

SPECIFICATIONS

24" wide heavy duty gas range, Vulcan Model No. VCBB24 (modular) or VCBB24B (cabinet base). Stainless steel front, plate ledge, front top ledge with pull-out condiment rails, sides, base, stub back and 6" adjustable legs. 1¹/₄" diameter front gas manifold. Four burners, totaling 65,000 BTU/hr. Cast burners and char-radiants with stainless steel super-charger burner dividers. Individual pilots and controls for each burner. Heavy duty cast slant grates, easy lift-off of 4 each for 24" wide units. Total input 65,000 BTU/hr.

Exterior Dimensions:

36³/₄"d x 24"w x 36"h on 6" adjustable legs

HEAVY DUTY GAS RANGE 24" WIDE CHARBROILER GAS RANGE

- U VCBB24 24" Charbroiler / Modular
- U VCBB24B 24" Charbroiler / Cabinet Base

STANDARD FEATURES

- Stainless steel front, front top ledge, burner box, sides, base, and stub back
- 1¼" diameter front gas manifold with ¾" rear gas connection (capped)
- 65,000 BTU/hr. (4 burners)
- Individual pilots for each burner
- Heavy-duty slant cast grates and char-radiants
- Stainless steel supercharger burner dividers
- 4" stainless steel stub riser
- 6" adjustable stainless steel legs for "B" models (no legs for modular model)
- Stainless steel cabinet base door
- Universal rack guides, with one removable shelf (cabinet base)
- One year limited parts and labor warranty

OPTIONAL FEATURES (Factory Installed)

- □ Cap and cover front manifold
- 4" adjustable flanged feet for modular models
- Less legs for dolly mounting of cabinet base models
- □ 3" high toe base for curb mounting for "S", "C", & "B" models

ACCESSORIES (Packaged & Sold Separately)

- ³/₄", 1", or 1¹/₄" gas pressure regulator (specify gas type pack loose)
- Set of 4 casters, 6" high (two locking)
- 6" adjustable flanged feet for cabinet base models
- Extra removable shelves for use with Universal rack guides (cabinet base)
- Banking strip
- □ 10", 22", or 34" high back risers (no shelf)
- □ 22" single deck solid or flo-thru high shelf risers
- □ 34" double deck solid or flo-thru high shelf risers
- Flexible gas hose with quick disconnect and restraining device
- Common condiment type, telescoping plate rail (starting at 24" length)



a division of ITW Food Equipment Group LLC

VULCAN

HEAVY DUTY GAS RANGE 24" WIDE CHARBROILER GAS RANGE

INSTALLATION INSTRUCTIONS

- A properly sized gas pressure regulator suitable for battery or single unit application must be furnished and installed. Natural gas 6.0" W.C., propane gas 10.0" W.C.
- An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.
- These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.


4.	<u>Clearances</u>	<u>Rear</u>	<u>Sides</u>
	Combustible	10"	10"
	Non-combustible	0"	0"


- For proper combustion, install equipment on adjustable legs or casters. On curb or platform, allow 3¹/₂" front overhang. Toe base with leveling bolts are required for curb installation. Specify when ordering.
- 6. Cannot be batteried with GH series equipment.
- 7. This appliance is manufactured for commercial installation only and is not intended for home use.


NOTE: In line with its policy to continually improve its product, Vulcan reserves the right to change materials and specifications without notice.


Specify type of gas when ordering. Specify altitude when above 2,000 feet.

40¾"









TOP CONFIGURATION	MODEL NUMBER	DESCRIPTION	TOTAL INPUT BTU / HR	SHIPPING WEIGHT LBS / KG
	VCBB24	24" Charbroiler / Modular	65,000	305 / 139
	VCBB24B	24" Charbroiler / Cabinet Base	65,000	405 / 184



P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

F37429 (07/16)