

**HEATED HOLDING****VULCAN****VPT SERIES  
PASS THROUGH HOLDING CABINETS****Model VPT15**

UL Listed. UL Listed to Canadian safety standards.  
Classified by UL to NSF Std. #4.

**SPECIFICATIONS**

Vulcan Model No. VPT pass through holding cabinets. Blower motor for gentle and even temperature distribution. Complete with 5" heavy duty casters (2 swivel with brakes and 2 rigid). Simple knob actuated electronic control for holding at temperatures up to 190°F. Adjustable racking will hold 18" x 26" or 12" x 20" pans or a combination of both on 1½" centers. Lip-load racking will hold 18" x 26" pans on 3" centers. Shelving will hold a variety of pan sizes. Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted handles, magnetic action door latch, and full insulation; 1½" in side walls and 2" in top. Integrated stainless steel frame for maximum strength. Field reversible doors. Complete with side mounted cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. One year limited parts and labor warranty. After the first year, lifetime parts warranty on the heating elements.

Units with adjustable racking:

- ☐ **VPT7** (see reverse for capacities)
- ☐ **VPT13** (see reverse for capacities)
- ☐ **VPT15** (see reverse for capacities)
- ☐ **VPT18** (see reverse for capacities)

Units with lip-load racking:

- ☐ **VPT7LL** (Fifteen 18" x 26" x 1" sheet pans)
- ☐ **VPT15LL** (Thirty 18" x 26" x 1" sheet pans)

Units with shelves:

- ☐ **VPT7SL** (Three Shelves)
- ☐ **VPT15SL** (Six Shelves)

**STANDARD FEATURES**

- Pass-Thru Holding Capacity:
  - 18" x 26" sheet pans.
  - 12" x 20" pans, or a combination of both on 1½" centers.
  - Other pan sizes on shelves.
- Blower motor for gentle and even temperature distribution.
- Dutch doors (VPT15 and VPT18).
- 5" heavy duty casters (2 swivel with brakes and 2 rigid).
- Recessed side mounted handles.
- Simple knob actuated electronic control for holding at temperatures up to 190°F.
- Universal tray slides adjustable on 1½" centers. VPT15 & VPT13 ship with 10 pairs of tray slides, VPT7 ships with 5 pairs and VPT18 ships with 15 pairs.
- Interior and the exterior are both constructed out of 20 gauge stainless steel.
- Fully insulated with 1½" in side walls and 2" in top.
- Integrated stainless steel frame for maximum strength.
- Magnetic action door latch.
- Field reversible doors.
- Side mounted cord.
- Complete with cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts.
- One year limited parts and labor warranty. After the first year, lifetime parts warranty on the heating elements.

**OPTIONS**

- ☐ 208/240 volt
- ☐ Humidity pan
- ☐ Full perimeter bumper
- ☐ Glass Dutch doors (VPT15 & VPT7 only)
- ☐ Wire shelves to sit on tray slides (RACK-VCH)
- ☐ Additional tray slides

**VULCAN**


a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote &amp; Order Fax: 1-800-444-0602




## VPT SERIES PASS THROUGH HOLDING CABINETS


Drawings shown with  
optional bumper

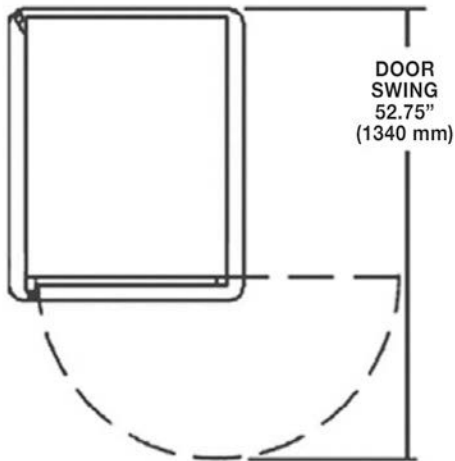


All Models Top View

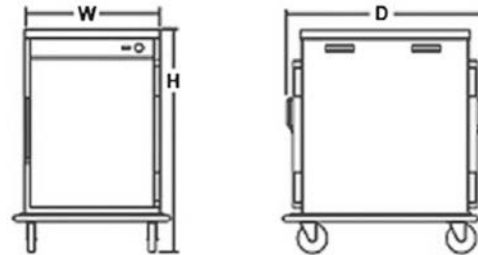

VPT7 Front & Side Views

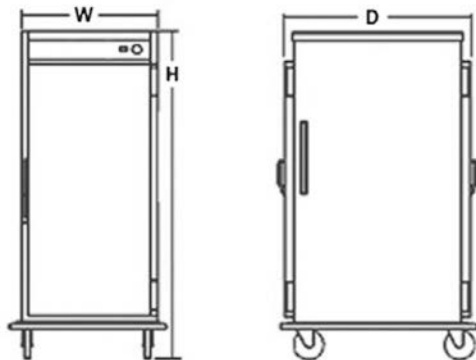

VPT13 Front & Side Views

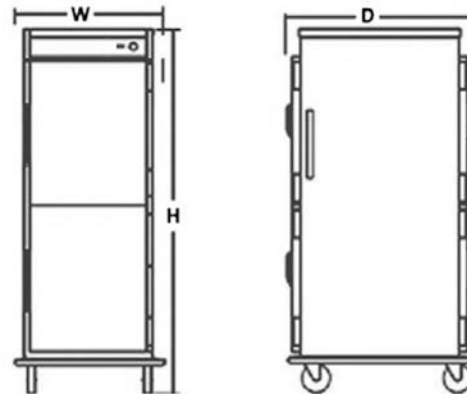

VPT15 Front & Side Views

| MODEL   | DIMENSIONS                    | CAPACITY                  |                      | ELECTRICAL |       |      | SHIPPING WEIGHTS |     |
|---------|-------------------------------|---------------------------|----------------------|------------|-------|------|------------------|-----|
|         | EXTERIOR                      | 12" x 20" x 2 1/2" PANS   | 18" x 26" SHEET PANS | VOLTS      | WATTS | AMPS | LBS              | KG  |
| VPT7    | 27" W x 34 1/2" D x 40" H     | 14                        | 7                    | 120/240    | 1,500 | 12.5 | 198              | 90  |
| VPT7LL  | 27" W x 34 1/2" D x 40" H     | NA                        | 15                   | 120/240    | 1,500 | 12.5 | 198              | 90  |
| VPT7SL  | 27" W x 34 1/2" D x 40" H     | Unit comes with 3 shelves |                      | 120/240    | 1,500 | 12.5 | 198              | 90  |
| VPT13   | 27" W x 34 1/2" D x 61" H     | 26                        | 13                   | 120/240    | 1,500 | 12.5 | 270              | 123 |
| VPT15   | 27" W x 34 1/2" D x 66 1/2" H | 30                        | 15                   | 120/240    | 1,500 | 12.5 | 297              | 135 |
| VPT15LL | 27" W x 34 1/2" D x 66 1/2" H | NA                        | 30                   | 120/240    | 1,500 | 12.5 | 297              | 135 |
| VPT15SL | 27" W x 34 1/2" D x 66 1/2" H | Unit comes with 6 shelves |                      | 120/240    | 1,500 | 12.5 | 297              | 135 |
| VPT18   | 27" W x 34 1/2" D x 73 1/2" H | 36                        | 18                   | 120/240    | 1,500 | 12.5 | 337              | 153 |

\*per compartment

Optional bumper adds 3 1/4" to the width and 1 5/8" to the depth.



a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

**NOTE:** In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.