1094 SURECLOSE HYDRAULIC DOOR **CLOSER**

ITEM# 1094

CONCEALED MOUNTING

NSF.

COMPONENT

- Powerful gas-loaded hydraulic cylinder guarantees controlled closure.
- Exposed and concealed mounting models.
- Patented solid steel enclosed housing and bend-resistant hook assure long wear in heavy use.
- Extra-wide hook ensures roller pick-up and overcomes align ment problems.
- Life-cycle tested to operate reliably even after a half-million closures.
- Easily replaces any conventional door closer.
- Kason walk-in hinges and latches where self-closing doors with controlled closure are needed.
- Mounting slots on hook allow for easy adjustment to compensate for door sag, keeping roller aligned with hook for proper function.

1094S DUAL-SPEED CLOSER

All the features of the 1094 Sure-Close, with the additional benefit of a specially developed snubbing mechanism. Initial fast closing action allows unit to withstand slamming force, while secondary, slower action provides gradual closing to lessen final impact.

SPECIFICATIONS

MATERIAL: Heavy gauge steel. Housing and hook also available in stainless steel

FINISH: **Polished or** brushed chrome, stainless steel, or powder coat

MOUNTING: Holes drilled for No. 10 (5.0 mm) screws (included)

11094000026


11094000027

11094000926

11094000927

PACKAGING: Closers and hooks packaged separately; 24 to a carton

WEIGHT: See order information

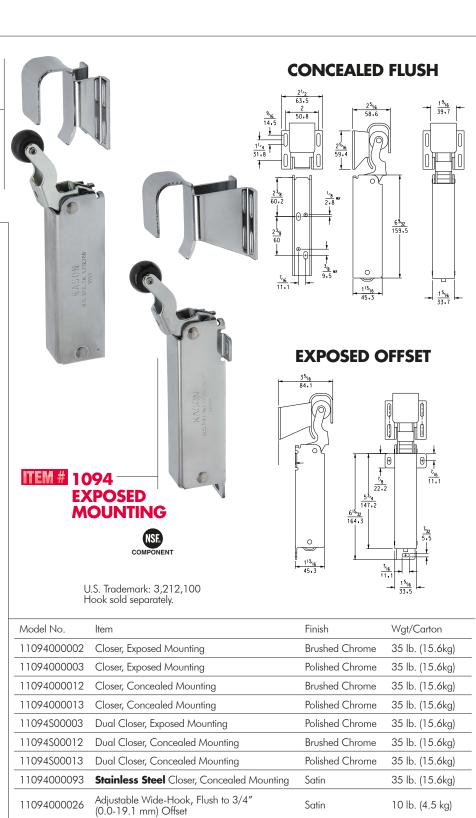

Satin

Satin

Satin

Satin



© 2016 Kason Industries, Inc.

Adjustable Wide-Hook, 7/8"-1-5/8"

Adjustable Stainless Steel Wide-Hook, Flush

Adjustable Stainless Steel Wide-Hook,

7/8"-1-5/8" (22.2-41.3 mm) Offset

(22.2-41.3 mm) Offset

to 3/4" (0.0-19.1 mm) Offset

10 lb. (4.5 kg)

13 lb. (5.9kg)

10 lb. (4.5 kg)

13 lb. (5.9kg)