

STAR-MAX[®] 30 Ib. ELECTRIC FRYER Model 530FF

Features/Benefits:

- ★ Star-Max® 30 lb. electric countertop fryer is designed for high volume operations and offers excellent frying flexibility for many types of menu items.
- ★ NEW longer lasting, heavy-duty metal knobs.
- ★ One-piece 30 lb. lift-out nickel plated steel kettle for easy straining of oils.
- ★ Immersion tubular heating elements provide even heat distribution and swing up making cleaning a snap.
- ★ Snap-action thermostat ranges from 200°F to 375°F and provides quick response to temperature change.
- ★ Hi-limit safety thermostat, on/off switch and two indicator lights provide safe and easy operation.
- ★ Two large nickel plated steel mesh side hanging baskets (8-3/4"W x 5-1/4"D x 10"L) provide continuous flow of product during peak periods
- ★ All stainless steel cabinet for maintenance free operation.
- ★ Heavy-duty 4" adjustable legs to match the height of other Star-Max equipment in your line.

Applications:

Star-Max® 30lb. electric fryer requires only 24" of counter space and designed for high volume operations. No matter what the menu items; onion rings, fries, chicken or fish, Star-Max electric fryers will meet your operation's demand.

Quality Construction:

Star-Max® 30lb. electric fryer features all stainless steel construction. Snap-action thermostat ranges from 200°F to 375°F. A one-piece nickel plated steel lift-out kettle with tubular two position swing up elements. A terminal block for making line connections is provided, fryer operates on 208 or 240 volts.

Warranty:

Star-Max®electric fryer is covered by Star's **TWO YEAR** parts and labor warranty.







Star Manufacturing - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800 Phone: (314) 678-6303 - FAX: (314) 781-5445 - www.star-mfg.com


S103/1062



Star-Max[®] Electric Fryer

🖪 Star Manufacturing

STAR-MAX[®] 30 lb. ELECTRIC FRYER

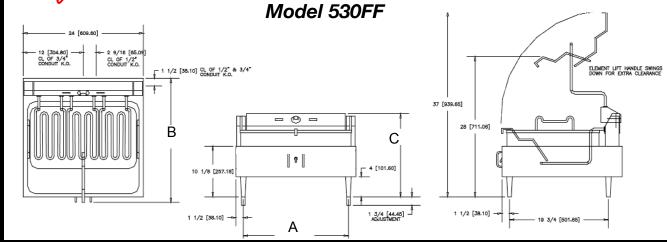

Performance Data									
Model No. Pre-Heat to 350°F		Fat Capacity	Pounds of French Fries	Watts to Maintain 350°F					
			Per Hour	Per Hour					
530FF	5 Minutes	30 lbs. (13.6 kg)	65 lbs. (29 kg)	860					

Dimensions & Weight

	Overall Dimension	ons			
(A)	(B)	(C)	Cooking Surface	Approximat	e Weight
Width	Depth	Height	Height	Installed	Shipping
Inches	Inches	Inches	Inches	lbs.	lbs.
(cm)	(cm)	(cm)	(cm)	(kg)	(kg)
24	24-3/4	16-5/8	10-1/2	63	92
(61.0)	(62.9)	(42.3)	(26.7)	(28.6)	(41.75)
Fat Container			Foam Compartment		
Width	Depth	Height	Width	Depth	Height
Inches	Inches	Inches	Inches	Inches	Inches
(cm)	(cm)	(cm)	(cm)	(cm)	(cm)
20-7/8	12-1/2	4-3/4	21-7/8	18	2-3/4
(53.0)	(31.6)	(12.1)	(55.6)	(45.7)	(7.0)
	(A) Width Inches (cm) 24 (61.0) Width Inches (cm) 20-7/8	Overall Dimension (A) (B) Width Depth Inches Inches (cm) (cm) 24 24-3/4 (61.0) (62.9) Fat Containe Width Depth Inches Inches (cm) (cm) 20-7/8 12-1/2	Overall Dimensions(A)(B)(C)WidthDepthHeightInchesInchesInches(cm)(cm)(cm)2424-3/416-5/8(61.0)(62.9)(42.3)Fat ContainerWidthDepthHeightInchesInchesInches(cm)(cm)(cm)20-7/812-1/24-3/4	Overall Dimensions(A)(B)(C)Cooking SurfaceWidthDepthHeightHeightInchesInchesInchesInches(cm)(cm)(cm)(cm)2424-3/416-5/810-1/2(61.0)(62.9)(42.3)(26.7)Fat ContainerWidthDepthHeightWidthInchesInchesInches(cm)(cm)(cm)20-7/812-1/24-3/421-7/8	Overall Dimensions(A)(B)(C)Cooking SurfaceApproximatWidthDepthHeightInchesInstalledIss.InchesInchesInchesInchesIbs.Iss.(cm)(cm)(cm)(cm)(kg)2424-3/416-5/810-1/263(61.0)(62.9)(42.3)(26.7)(28.6)Fat ContainerWidthDepthHeightWidthDepthInchesInchesInchesInchesInches(cm)(cm)(cm)(cm)(cm)12-1/220-7/812-1/24-3/421-7/818

Legs Adjustable 4" to 5-3/8" (10.2 cm to 13.7 cm)

Electrical Data

Model	Rated Wattage		Nominal Amps Per Line		
No.	208V	240V	Single Phase	Three Phase	
			208V 240V	208V 240V	
530FF	8640	11500	41.5 47.9	24 27.7	

Typical Specifications

Electric fryer has a stainless steel body. A 200°F - 375°F (93°C - 191°C) adjustable thermostat and a hi-limit safety thermostat, and a separate on-off switch are standard. A one piece nickel plated, lift out 30 lb. (13.5 kg) capacity steel kettle and 4" heavy-duty adjustable legs are standard. Unit has a tubular type, two position, swing-up element with a rated wattage of 11,500 watts on 240 volts. Two side mounted nickel plated, perforated steel mesh baskets are provided as standard. A terminal block for making line connections is provided, fryer operates on 208 or 240 volts. UL listed to US and Canadian standards. UL Classified to NSF STD 4. Printed in the U.S.A.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

Star Manufacturing - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800 Phone: (314) 678-6303 - FAX: (314) 781-5445 - www.star-mfg.com