Project:	AIA#
Item:	
Location:	SIS#
Approved:	

HORIZONTAL BOTTLE COOLERS

DW49HC Deep Well Series Hydrocarbon Series MODELS: DW49HC-S

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty



CABINET CONSTRUCTION

- Stainless steel exterior
- · Interior is galvanized with stainless steel floor
- Full electronic control
- Tops include easy glide, stainless steel lids and stainless steel counter top
- · Countertop with integral glass stops
- Three (3) Epoxy coated adjustable wire dividers
- Bottle cap & cap catcher standard
- Constructed with high cooling RPM fans to provide fast cooling

OPTIONS & ACCESSORIES

- Black exterior
- · Stainless steel interior
- Wire divider
- Lid Locks
- 3" casters or 6" Adjustable leg with plate
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Forced air refrigeration system holds product between 36° 40°F














3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	DW49HC-S	
EXTERNAL DIMENSIONAL DATA		
Width Overall	50"	
Depth Overall	26 ½"	
Depth Overall with Cap Catcher	27 ³ ⁄ ₄ "	
Height Overall	33 ¾"	
Number of Lids	2	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	13.7	
Internal Width Overall (in)	46"	
Internal Depth Overall (in)	22 ³ ⁄ ₄ "	
Internal Height Overall at Step (in)	15 ½"	
Internal Height Overall (in)	26 ³ ⁄ ₄ "	
Number of Dividers	3	
12 oz. Bottle Capacity	17 ½ Cases	
12 oz. Can Capacity	23 ¾ Cases	
ELECTRICAL DATA		
Full Load Amperes	2.5	
REFRIGERATION DATA		
Horsepower*	1/4	
Capacity (BTU/Hr)*	1702	
SHIPPING DATA		
Gross Weight - Crated	266 lbs	
Height - Crated	40"	
Width - Crated	53"	
Depth - Crated	30"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Horizontal Bottle Coolers-Deep Well Models Models: DW49HC-S

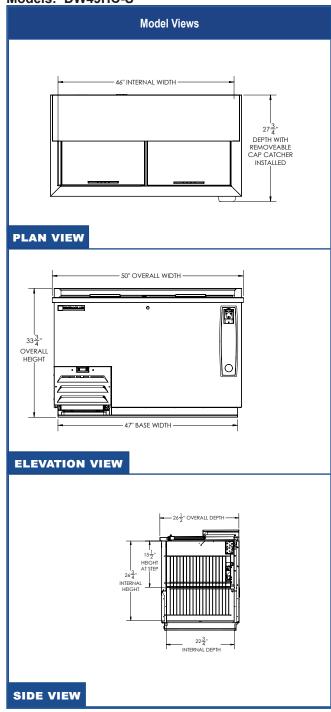















Units pre-wired at factory 115/60/1 NEMA 5-15P and include 8' long cord and plug set.