Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

HORIZONTAL BOTTLE COOLERS

DW79HC Deep Well Series Hydrocarbon Series

MODELS:
DW79HC-S-29



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty



CABINET CONSTRUCTION

- Stainless steel exterior
- · Interior is galvanized with stainless steel floor
- Full electronic control
- Tops include easy glide, stainless steel lids and stainless steel counter top
- · Countertop with integral glass stops
- Three (3) Epoxy coated adjustable wire dividers
- Bottle cap & cap catcher standard
- Constructed with high cooling RPM fans to provide fast cooling

OPTIONS & ACCESSORIES

- Black exterior
- · Stainless steel interior
- Wire divider
- Lid Locks
- 3" casters or 6" Adjustable leg with plate
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Forced air refrigeration system holds product between 30° 32°F














3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	DW79HC-S-29	
EXTERNAL DIMENSIONAL DATA		
Width Overall	80"	
Depth Overall	26 ½"	
Depth Overall with Cap Catcher	27 ¾"	
Height Overall	33 ³ ⁄ ₄ "	
Number of Lids	3	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	24.1	
Internal Width Overall (in)	76"	
Internal Depth Overall (in)	26 ¾"	
Internal Height Overall at Step (in)	15 %"	
Internal Height Overall (in)	26 ¾"	
Number of Dividers	5	
12 oz. Bottle Capacity	32 Cases	
12 oz. Can Capacity	45 3/4 Cases	
ELECTRICAL DATA		
Full Load Amperes	2.5	
REFRIGERATION DATA		
Horsepower*	1/4	
Capacity (BTU/Hr)*	1702	
SHIPPING DATA		
Gross Weight - Crated	432 lbs	
Height - Crated	38"	
Width - Crated	83"	
Depth - Crated	30"	

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

FROSTY Horizontal Bottle Coolers-Deep Well Models Models: DW79HC-S-29

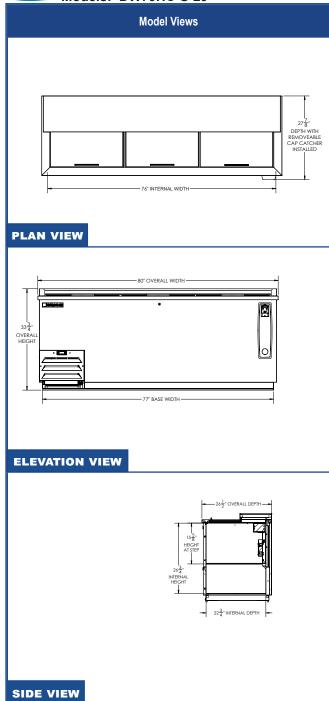







115/60/1 NEMA 5-15P and include 8' long cord and plug set.

