

| Project:  | AIA# |
|-----------|------|
| Item:     |      |
| Location: | SIS# |
| Approved: |      |

## P-SERIES TOP MOUNT REACH-THRU REFRIGERATOR

PRD2HC-1BHG Half-Glass Door Refrigerator Hydrocarbon Series

MODEL: PRD2HC-1BHG



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

### CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top, bottom & back)
- Interior is made of corrosion resistant aluminum
- · Full electronic control
- Expansion valve technology
- Variable speed compressor technology
- · Self-closing doors with 120° stay-open feature
- Glass pass-thru half doors
- · LED interior light
- · Cylinder locks
- · Snap-in magnetic gaskets for positive door seal
- Hinged front shroud
- · Energy saving thermal breaker
- · Stainless steel breaker caps
- Heavy-duty epoxy wire coated shelves
- 6" High adjustable stainless steel legs
- · 8' Cord and plug (see electrical data for details)

## **OPTIONS & ACCESSORIES**

- · Stainless steel case back
- · Additional shelves
- Shelf clips
- 3" or 6" Casters
- 6" Seismic legs
- Tray slides (type A & A/C)
- · Door swing orientation (at time of order)
- Remote option\* (see note back on page)

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Refrigerator capable of maintaining product temperature 36°F to 38°F




















| MODEL                                 | PRD2HC-1BHG               |  |
|---------------------------------------|---------------------------|--|
| EXTERNAL DIMENSIONAL DATA             |                           |  |
| Width Overall                         | 52 ½"                     |  |
| Depth Overall with Handle             | 36"                       |  |
| Height Overall                        | 84 ½"                     |  |
| Number of Doors                       | 8                         |  |
| Depth with Both Side of Door Open 90° | 83 3/8"                   |  |
| Door Opening (in)                     | 21 ½" x 25 ¼"             |  |
| INTERNAL DIMENSIONAL DATA             |                           |  |
| NET Capacity (cubic ft.)              | 48.33                     |  |
| Internal Width Overall (in)           | 48 ½"                     |  |
| Internal Depth Overall (in)           | 26"                       |  |
| Internal Height Overall (in)          | 56 %"                     |  |
| No. of Shelves                        | 6                         |  |
| ELECTRICAL DATA                       |                           |  |
| Full Load Amperes* 115/60/1           | 8.5                       |  |
| REFRIGERATION DATA                    |                           |  |
| Horsepower*                           | 3/4                       |  |
| Capacity (BTU/Hr)*                    | Variable Speed Technology |  |
| SHIPPING DATA                         |                           |  |
| Gross Weight (crated lbs)             | 650 lbs                   |  |
| Height - Crated                       | 88"                       |  |
| Width - Crated                        | 45"                       |  |
| Depth - Crated                        | 60"                       |  |

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# Top Mount Reach-Thru Refrigerator

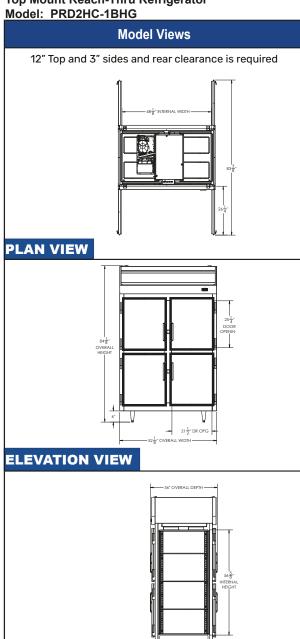



















Units pre-wired at factory 115/60/1 and include 8' long cord and plug set.





SIDE VIEW