刀
$\leq$
$\overline{\infty}$
Ĭ
<u></u>
W
Ö
-
9
$\leq$
2
4
刀
П
0
I
Z
S
• •



Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## RI REACH-IN REFRIGERATORS

RI18HC Half Glass Door Bottom Mount Refrigerator **Hydrocarbon Series** 

MODELS: RI18HC-HG



# 3 Year Parts/Labor Warranty **Additional 4 Year Compressor Warranty**

### **CABINET CONSTRUCTION**

- Stainless steel exterior and interior
- Full electronic control
- Interior LED Light
- Five (5) shelves standard
- One piece grille
- Self-closing doors with 120° Stay-open feature, on spring loaded hinges
- Snap-in magnetic door gasket
- 3" heavy duty casters standard
- Maintains temperature between 36° and 38°F

### **OPTIONS & ACCESSORIES**

- Epoxy shelves & clips
- 6" casters or 6" leg optional
- Wire shelf dividers
- Right or left hinged door
- Remote option (see note on back page)

#### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	RI18HC-HG	
EXTERNAL DIMENSIONAL DATA		
Width Overall	27 1/4"	
Depth Overall	29 1/4"	
Height Overall	72 3/8"	
Number or Doors	2	
Depth with Door Open 90°	52 15/16"	
Door Opening (in)	24 3/4" x 24 1/16"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	16.85	
Internal Width Overall (in)	24 1/4"	
Internal Depth Overall (in)	23 7/8"	
Internal Height Overalls (in)	Front 52 15/16" Rear 46 11/16"	
Number of Shelves	5	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	5.5	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity BTU	1997	
WEIGHT DATA		
Gross Weight (Crated lbs)	334 lbs	
Height - Crated	75"	
Width - Crated	30"	
Depth - Crated	32"	

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# **Bottom Mount Reach-In Half Glass Door**

Models: RI18HC-HG

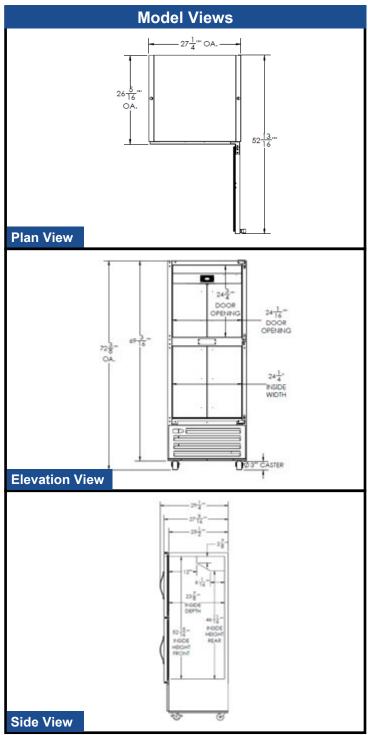

#### **ELECTRICAL CONNECTION**















Unit pre-wired at factory and include 8' long cord and plug set.



