Location:	Approved:		BEVERAGE-AIR	Project: Item: Location:
-----------	-----------	--	--------------	--------------------------------

## RI REACH-IN REFRIGERATORS

RI18HC Half Solid Door Bottom Mount Hydrocarbon Series MODELS: RI18HC-HS

AIA#

SIS#



## 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Stainless steel exterior and interior
- Full electronic control
- Interior LED Light
- Five (5) shelves standard
- One piece grille
- Self-closing doors with 120° Stay-open feature, on spring loaded hinges
- Snap-in magnetic door gasket
- 3" heavy duty casters with two brakes standard
- Maintains temperature between 36° and 38°F

#### **OPTIONS & ACCESSORIES**

- Epoxy shelves & clips
- 6" casters or 6" leg optional
- Wire shelf dividers
- · Right or left hinged door
- Remote option (see note on back page)

### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	RI18HC-HS		
EXTERNAL DIMENSIONAL DATA			
Width Overall	27 1/4"		
Depth Overall	29 1/4"		
Height Overall with 3" Casters	72 3/8"		
Number or Doors	2		
Depth with Door Open 90°	52 13/16"		
Door Opening (inches)	24 3/4" x 24 1/16"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	16.85		
Internal Width Overall (in)	24 1/4"		
Internal Depth Overall (in)	23 7/8"		
Internal Height Overall—(in)	Front 52 15/16" Rear 46 11/16"		
Number of Shelves	5		
ELECTRICAL DATA			
Full Load Amperes 115/60/1	5.5		
REFRIGERATION DATA			
Horsepower	1/4		
Capacity BTU	1997		
WEIGHT DATA			
Gross Weight (Crated lbs)	328 lbs		
Height - Crated	75"		
Width - Crated	30"		
Depth - Crated	32"		

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# **Bottom Mount Reach-In**

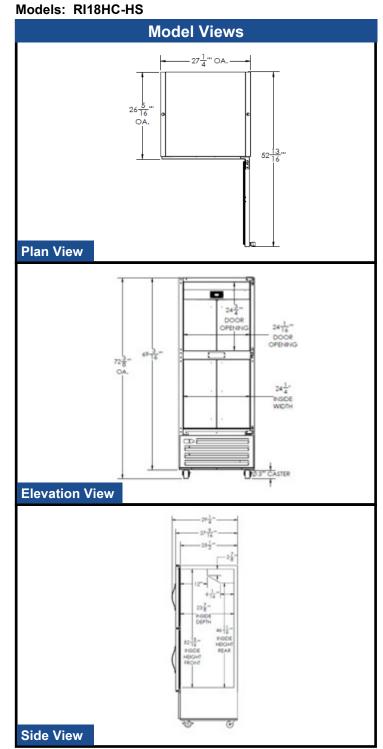

## **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord and plug set.

















