Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## SCHOOL MILK FORCED AIR COOLER

SMF34HC Single Access Cooler Hydrocarbon Series

**MODELS:** SMF34HC-1-S SMF34HC-1-W





# 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

## **CABINET CONSTRUCTION**

- · SS units: Stainless steel exterior and interior
- White units: White coated steel exterior. Interior features galvanized walls with stainless steel floor for maximum milk crate support
- Stainless steel lids, hinges doors and door latches
- Full electronic control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter
- Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 6" Heavy-duty plate casters (2 with locks)
- · Balanced, forced-air refrigeration system provides rapid chilling of product
- Maintains continuous milk temperature between 36° 40°F

#### **OPTIONS & ACCESSORIES**

- Stainless steel interior on white models -02
- Corner bumpers
- · Cafeteria tray slide
- Graphics

#### **REFRIGERATION SYSTEM**

• Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more




















MODEL	SMF34HC-1 (white & stainless steel models)	
EXTERNAL DIMENSIONAL DA	ТА	
Width Overall	34"	
Depth Overall	30 %"	
Height Overall with Casters	46 ½"	
Number of Lids/Doors	Single Access	
NTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	13.49	
Internal Width Overall (in)	31"	
Internal Depth Overall (in)	27"	
Internal Height Usable (in)	25 ¾"	
CASE CAPACITY		
13" X 13" 11"	8	
19" X 13" 11"	4	
LECTRICAL DATA		
Full Load Amperes	3.0	
REFRIGERATION DATA		
Horsepower	1/6	
Capacity (BTU/Hr)	1010	
SHIPPING DATA		
Gross Weight - Crated	367 lbs	
Height - Crated	48"	
Width - Crated	38"	
Depth - Crated	39"	

School Milk Cooler Model: SMF34HC-1

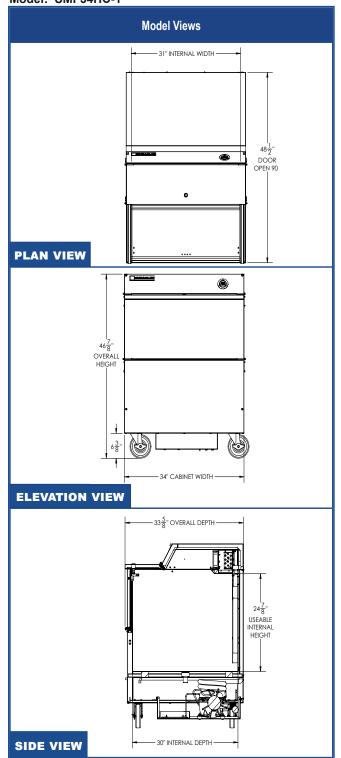

### \*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P

Units pre-wired at factory and include 8' long cord and plug set.

