Project:	AIA#
Item:	
Location:	SIS#
Approved:	

SCHOOL MILK COLD WALL COOLER

ST34HC Dual Access Cooler Hydrocarbon Series

MODELS: ST34HC-S ST34HC-W





3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- · SS units: Stainless steel exterior and interior
- White units: White coated steel exterior. Interior features a one piece, stainless steel back, front, floor with galvanized side walls for maximum milk crate support
- Stainless steel lids, hinges doors and door latches
- Dual sided access
- Full electronic control
- · Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- · Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 4" Heavy-duty plate casters (2 with locks)
- Maintains product temperature between 36° 40°F
- Cold wall milk coolers are designed to hold product temperature during service. Product should be removed at the end of service and moved to long-term, refrigerated storage

OPTIONS & ACCESSORIES

- Corner bumpers
- · Cafeteria tray slide
- Graphics

REFRIGERATION SYSTEM

• Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more




















MODEL	ST34HC (white & stainless steel models)	
EXTERNAL DIMENSIONAL DATA		
Width Overall	34"	
Depth Overall	31 ¼"	
Height Overall with Casters	41 ½"	
Number of Lids/Doors	Dual Access	
Both Lids Extended	61"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	12.37	
Internal Width Overall (in)	31"	
Internal Depth Overall (in)	27"	
Internal Height Usable (in)	25 ½"	
CASE CAPACITY		
13" X 13" 11"	8	
19" X 13" 11"	4	
ELECTRICAL DATA		
Full Load Amperes	3.7	
REFRIGERATION DATA		
Horsepower	1/2	
Capacity (BTU/Hr)	1690	
SHIPPING DATA		
Gross Weight - Crated	277 lbs	
Height - Crated	48"	
Width - Crated	33"	
Depth - Crated	37"	

School Milk Cooler

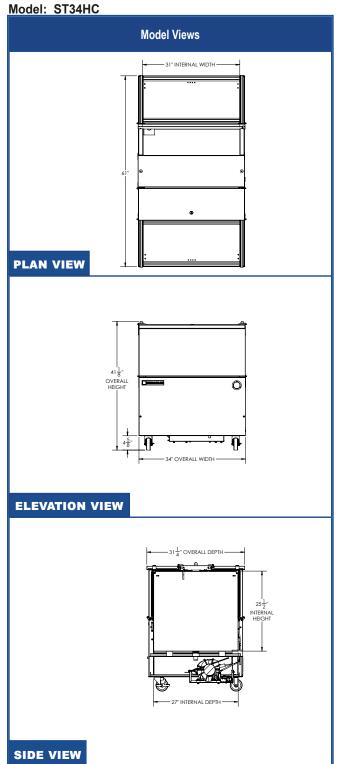

*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P

Units pre-wired at factory and include 8' long cord and plug set.

