B A	BEVERAGE-AIR	\ @
-----	--------------	------------

SCHOOL MILK FORCED AIR COOLER

STF49HC Dual Access Cooler Hydrocarbon Series







OPTIONS & ACCESSORIES

- Stainless steel interior on white models -02
- Corner bumpers
- · Cafeteria tray slide
- Graphics

CABINET CONSTRUCTION

- · SS units: Stainless steel exterior and interior
- White units: White coated steel exterior. Interior features galvanized
- · Stainless steel lids, hinges doors and door latches
- Full electronic control
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 5" Heavy-duty plate casters (2 with locks)
- · Balanced, forced-air refrigeration system provides rapid chilling of product
- Maintains product temperature between 36° 40°F

REFRIGERATION SYSTEM

- Uses environmentally friendly and meets all regulatory requirements for CARB, SNAP, DOE &
- · Epoxy coated evaporator coil


















AIA#

SIS#



MODEL	STF49HC (white & stainless steel models)		
EXTERNAL DIMENSIONAL DATA			
Width Overall	49"		
Depth Overall	34"		
Height Overall with Casters	47 3/4		
Number of Lids/Doors	Dual Access		
Both Lids Extended	64"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	20.55		
Internal Width Overall (in)	46"		
Internal Depth Overall (in)	30"		
Internal Height Usable (in)	24 5/8"		
CASE CAPACITY			
13" X 13" 11"	12		
19" X 13" 11"	8		
ELECTRICAL DATA			
Full Load Amperes	3.3		
REFRIGERATION DATA			
Horsepower	1/3		
Capacity (BTU/Hr)	2052		
SHIPPING DATA			
Gross Weight - Crated	334 lbs		
Height - Crated	54"		
Width - Crated	38"		
Depth - Crated	54"		

School Milk Cooler Model: STF49HC

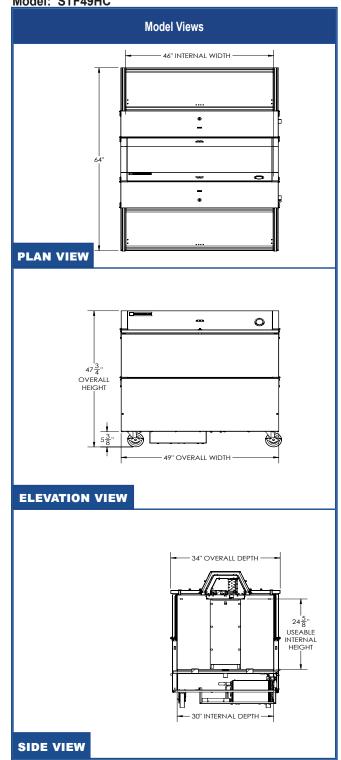

*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P

Units pre-wired at factory and include 8' long cord and plug set.

