Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## SCHOOL MILK FORCED AIR COOLER

STF58HC Dual Access Cooler Hydrocarbon Series

MODELS: STF58HC-1-S STF58HC-1-W





# 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

### **CABINET CONSTRUCTION**

- · SS units: Stainless steel exterior and interior
- White units: White coated steel exterior. Interior features galvanized
- Stainless steel lids, hinges doors and door latches
- Full electronic control
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 5" Heavy-duty plate casters (2 with locks)
- · Balanced, forced-air refrigeration system provides rapid chilling of product
- Maintains product temperature between 36° 40°F

#### **OPTIONS & ACCESSORIES**

- Stainless steel interior on white models -02
- Corner bumpers
- · Cafeteria tray slide
- Graphics

#### REFRIGERATION SYSTEM

- Uses environmentally friendly and meets all regulatory requirements for CARB, SNAP, DOE &
- Epoxy coated evaporator coil


















3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	STF58HC (white & stainless steel models)	
EXTERNAL DIMENSIONAL DATA		
Width Overall	58"	
Depth Overall	34"	
Height Overall with Casters	47 3/4	
Number of Lids/Doors	Dual Access	
Both Lids Extended	64"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	24.3	
Internal Width Overall (in)	46"	
Internal Depth Overall (in)	30"	
Internal Height Usable (in)	24 5/8"	
CASE CAPACITY		
13" X 13" 11"	16	
19" X 13" 11"	10	
ELECTRICAL DATA		
Full Load Amperes	3.3	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2052	
SHIPPING DATA		
Gross Weight - Crated lbs	496 lbs	
Height - Crated	54"	
Width - Crated	38"	
Depth - Crated	63"	

School Milk Cooler Model: STF58HC

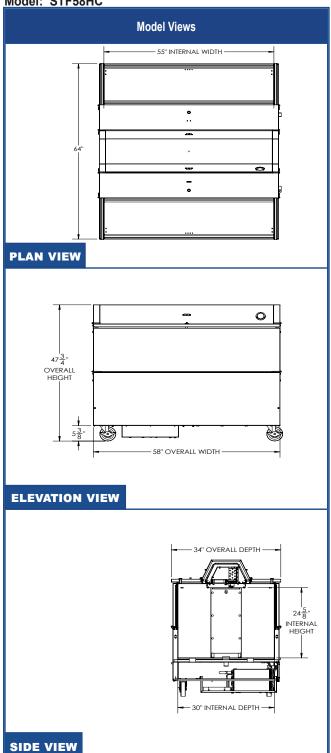

## \*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P

Units pre-wired at factory and include 8' long cord and plug set.

