

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

# **DELI/BAKERY CASE**

MODEL: CDR6HC-1-B

CDR6HC Deli/Bakery Case Refrigerator Hydrocarbon Series

## 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty



#### **CABINET CONSTRUCTION**

- Exterior has black powder coated galvanized steel
- Stainless steel interior with mirrored end caps
- Sliding glass, removable doors
- Curved front glass
- Full electronic control with various set points
- · LED lighting with on and off switch
- Electrical outlet for scale
- · Adjustable shelves for better product display
- Price tag molding standard
- · Open food rated

#### **OPTIONS & ACCESSORIES**

- Dry case (add -D to refrigerated models)
- 3" casters
- 5" casters

#### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- · Hot gas condensate evaporator
- · Hot gas defrost system
- · Maintenance free condenser
- Refrigerator maintains product temperatures between 33°F to 41°F
- Direct sunlight should be avoided
- Tested to 75°F and 55% relative humidity




3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	CDR6HC-B	
EXTERNAL DIMENSIONAL DATA		
Width Overall	73 <sup>11</sup> / <sub>16</sub> "	
Depth Overall	35 <sup>47</sup> / <sub>64</sub> "	
Height Overall	48 %16"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	21	
Internal Width Overall (in)	69 <sup>31</sup> / <sub>32</sub> "	
Internal Depth Top & Middle Overall (in)	14 <sup>31</sup> / <sub>32</sub> "	
Internal Depth Overall Bottom (in)	24 7⁄32"	
Internal Height Overall (in)	38 <sup>43</sup> / <sub>64</sub> "	
Number of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	5.0	
REFRIGERATION DATA		
Horsepower	1/4	
Energy Consumption	8.33 kw-hr/24 hrs	
SHIPPING DATA		
Gross Weight- Crated	654 lbs	
Height - Crated	58 <sup>5</sup> ∕16"	
Width - Crated	80 <sup>13</sup> ⁄16"	
Depth - Crated	40"	

### Deli/Bakery Case Refrigerator

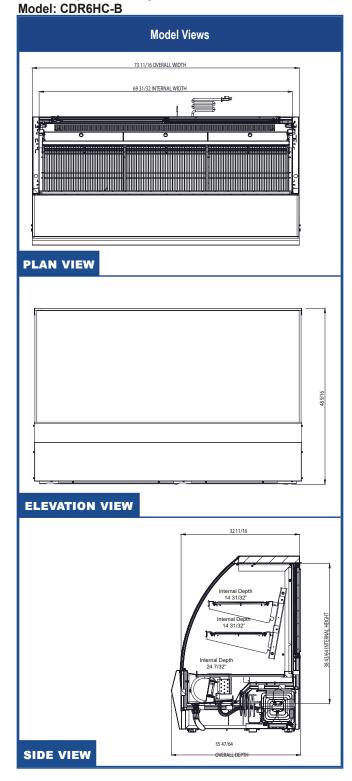

#### \*ELECTRICAL CONNECTION



120/60/1

Units pre-wired at factory and include 8' long cord NEMA 5-15P and plug set.

