

# EXTREMEAIR® GXT & EXT HAND DRYER SPECIFICATIONS



White ABS



White Steel



Black Graphite



Satin Chrome



Stainless Steel

## COMPACT·HIGH SPEED·ENERGY EFFICIENT

### STANDARD FEATURES

#### Adjustable Sound & Speed

New technology allows the hand dryer to be adjusted to your preference - providing the perfect balance of speed, energy efficiency and sound. **It's ideal for sports stadiums, schools or a quiet library.**

A dial inside of the dryer provides easy adjustment of the sound from **83 to 69 dB** with a speed of 19,000 to 10,000 LFM. There is NO need to upgrade or replace parts.

#### Universal Voltage

The new **EXTREMEAIR** can be connected to any voltage from 100 to 240 volts, 50/60 Hz. The dryer configures itself to your voltage, making installation easier.

#### Antimicrobial-Infused Air Delivery System

While all of our hand dryers eliminate paper towel mess, the **EXTREMEAIR** goes one step further with antimicrobial-infused air surfaces. There is NO need for expensive filter replacements.

**80 - 90% LESS ENERGY 3X FASTER 98% COST SAVINGS**

### GXT SERIES - HEAT

**FASTEST** • **MAXIMUM**  
performance

**best selling** • **energy efficient**

**135° F Air Temperature**  
At 72° F room temperature

**10 + seconds**  
Adjustable Drying Time

**1500 - 800 watts**  
Adjustable Power

#### GXT MODEL REFERENCE CHART

ABS White	Steel White	Black Graphite	Steel Chrome	Stainless Steel
GXT9	GXT9-M	GXT9-BG	GXT9-C	GXT9-SS

#### ELECTRICAL

**Universal Voltage**  
**100-240 V 50/60 Hz**  
12.5 A max. @ 120 V  
6.5 A max. @ 240 V

For ADA accessories visit [americandryer.com](http://americandryer.com)

### EXT SERIES - NO HEAT

**GREENEST** • **NO dedicated**  
line required

**Connect up to 3 dryers on one line!**

**85° F Air Temperature**  
At 72° F room temperature

**12 + seconds**  
Adjustable Drying Time

**540 - 300 watts**  
Adjustable Power

#### EXT MODEL REFERENCE CHART

ABS White	Steel White	Black Graphite	Steel Chrome	Stainless Steel
EXT7	EXT7-M	EXT7-BG	EXT7-C	EXT7-SS

#### ELECTRICAL

**Universal Voltage**  
**100-240 V 50/60 Hz**  
4.5 A max. @ 120 V  
2.3 A max. @ 240 V

For ADA accessories visit [americandryer.com](http://americandryer.com)

# EXTREMEAIR® GXT & EXT HAND DRYER SPECIFICATIONS



## New Smart Sensor

Ultra energy efficient microprocessor-controlled sensor turns dryer on when hands are under the outlet for up to 35 seconds. Standby power is only one watt. RoHS compliant lead-free design.



## New Longer Lasting Motor

New motor lasts up to 25% longer and is quieter. The 5/8 HP motor is adjustable between 14,000 to 24,000 RPM. Automatic resetting thermal protector.



## Compact

The EXTREMEAIR is the most compact high speed hand dryer in the industry. It's 43% smaller than old "industry standard" high speed hand dryers.



## Vandal Resistant

Two tamper proof screws secure the heavy duty vandal resistant cover to the steel base. Motor and heater are inaccessible to vandals. Air intake is shielded for additional safety.



## Heating Element

The heating element has an automatic thermal protector and operates in the black range for maximum life.



## Heavy Duty One-Piece Cover Options

Flame retardant white ABS  
Steel with white epoxy finish (M)  
Steel with black graphite epoxy finish (BG)  
Steel with satin chrome finish (C)  
Stainless steel with #4 brush finish (SS)



## 5 Year Premium Warranty

Includes same-day factory repair or shipment of replacement parts.

**DRYER PLACEMENT** - Dryers should be placed at least 2 feet apart and at least 12" from washbasin. Do not install dryer over washbasin. Automatic dryers should be at least 18" above any projection which may interfere with the operation of the automatic sensor.

**ELECTRICAL REQUIREMENTS** - GXT dryers connect to a single phase dedicated 15 or 20 amp line. EXT dryers do NOT require a dedicated line. Do not connect more than three EXT hand dryers to one 20 amp line.

**MOUNTING** - One side of dryer should be mounted to a stud. All surface mount dryers are provided with conduit entrances for both in-wall and surface wiring.

Quantity Estimate:

Average traffic washroom.....1 dryer per 2 washbasins  
Heavy traffic washroom.....1 dryer per washbasin  
54" wash fountain.....4 dryers per sink

**DIMENSIONS - Surface:** 10-1/8" W x 9-3/8" H x 5-5/8" D

**MOUNTING HEIGHTS:**

Men	44"
(From floor to bottom of hand dryer)	Women 42"
	Children 32-42"
	Handicapped 36"

**SHIPPING WEIGHT:**


EXTREMEAIR 9 lbs, EXTREMEAIR-M/BG/C/SS 10 lbs

## ACCESSORIES

**NEW**



ADA-WG WALL GUARD	ADA-RK RECESS KIT	AP ADAPTER PLATE
Accessories Reference Chart		
ADA-WG	ADA Compliant seamless stainless steel wall guard	
ADA-RK	ADA Compliant seamless stainless steel recess kit	
AP	Stainless steel universal adapter plate	
For more information, visit <a href="http://americandryer.com">americandryer.com</a>		

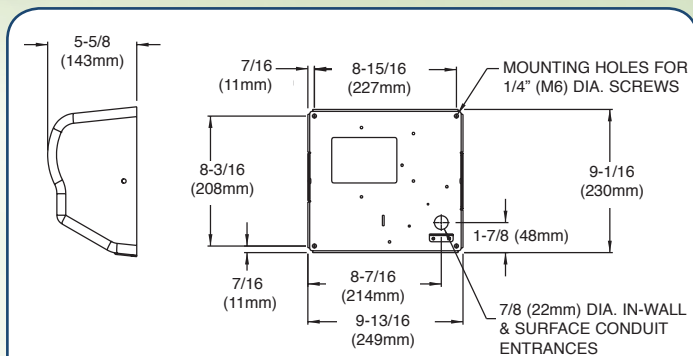

EXTREMEAIR Series Surface Mount



**American Dryer, Inc.**

33067 Industrial Road | Livonia, MI 48150 | U.S.A.  
Toll Free 800.485.7003 U.S. | Ph: 734.421.2400 | Fax 734.421.5580

Web: [www.americandryer.com](http://www.americandryer.com)  
Email: [sales@americandryer.com](mailto:sales@americandryer.com)

© American Dryer, Inc. All Rights Reserved. Rev. July 2013