

Cuisine Series Heavy Duty French Top Range

i	
Pro	ject
Ite	m
Qu	antity
CSI	Section 11400
Ар	proved
Da	te

Models

- C836-15
- C0836-15
- C0836-15M

Model C386-15 Range with Three 12" French Tops

Standard Features

- 15,000 BTU per 12" (305mm) hot top section
- 30,000 BTU open burners
- Full-range top burner valve control
- One-piece cast iron top grates
- Stainless steel front and sides
- Stainless steel front rail w/ position adjustable bar
- 1-1/4" NPT front gas manifold
- Can be installed individually or in a battery
- 6" (152mm) H stainless steel stub back
- 6" (152mm) chrome steel adj. legsStainless steel oven interior w/
- Stainless steel oven interior w removable porcelain bottom
- removable porcelain bottom40,000 BTU oven burner
- One chrome plated rack per oven four positions
- · Fully insulated oven interior
- 100% safety oven pilot
- Oven thermostat control -150°-500°F (66°- 60°C)

Options & Accessories

- Stainless steel back
- Range base convection oven (add RC)
- Porcelain oven interior in lieu of stainless steel interior – NC
- Single or double deck high shelf or back riser
- Modular unit w/ legs & shelf (suffix M)
- Modular unit w/o legs on Refrig. Base (change suffix M to PC)
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Continuous plate shelf, 48-72" for battery installations
- Gas shut-off valves 3/4", 1", 1 1/4"
 NPT (Specify)
- Gas regulator: 3/4"- 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect 3/4", 1", 1 1/4" (Specify)
- Stainless steel legs (set of four)
- · Flanged feet set of four
- Set of(4)polyurethane non- marking swivel casters w/front brakes.
- Extra oven rack
- Rear Gas Connection:, 3/4" NPT (max 250.000 BTU's) or 1-1/4" NPT
- · Stainless steel burner box top interior

Specifications

U.S. Range Cuisine 36" (914mm) wide Heavy Duty Range Series. Model _____ with total BTU/hr rating of _____ when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

Ovens - One piece oven door. Stainless steel oven interior with a heavy- duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C). One chrome plated oven rack for standard ovens and three for convection ovens.

12" (305mm) French Tops - 30,000 BTU/hr open top burner under front open - top section and 15,000 BTU/hr burner under rear hot top section.

Note: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall














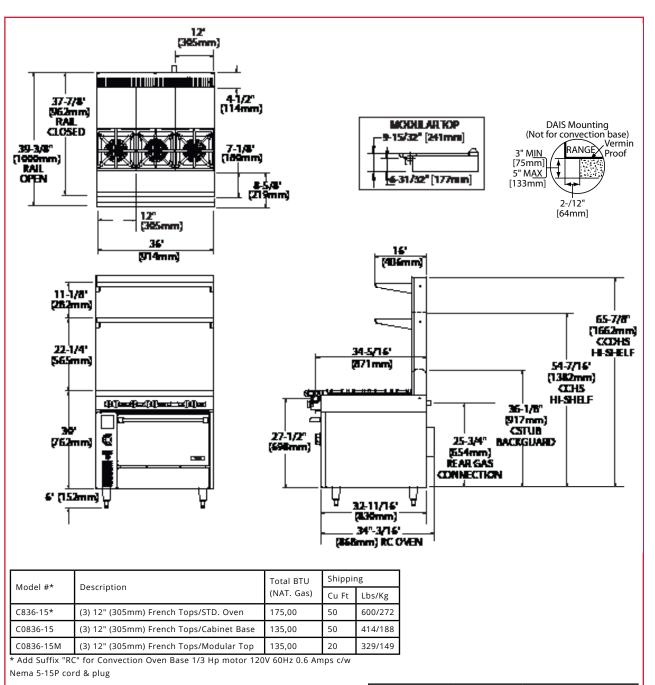

Individual Burner Ratings (BTU/hr)						
Burner	NAT.	PRO.	Burner	NAT.	PRO.	
Open Top	30,000	28,000	Std. Oven	40,000	35,000	
12" Hot Top	15,000		Conv. Oven	37,000	35,000	

Combustible Wall Clearance			
Sides	Back		
6" (152mm)	6" (152mm)		

Interior Dimensions: In (mm)				
Product	Height	Width	Depth	
Standard Oven	13-1/2(323)	26-/1/4 (667)	29 (737)	
Convection Oven	13-1/2(323)	26-/1/4 (667)	25 (635)	
Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)	

	Gas Pressure	NAT.	PRO.	
	Minimum Supply	7" WC	11" WC	
	Manifold Operating Pressure	6" WC	10" WC	
Gas Manifold 1-1/4" NPT				

Welbilt reserves the right to make changes to the design or specifications without prior notice.

