

Cuisine Series Heavy Duty Even Heat Hot Top Range

Project	
Item	_
Quantity	
CSI Section 11400	
Approved	
Date	

Models

- C836-9
- C0836-9
- C0836-9M



Model C836-9 Range with Two 18" Even Heat Hot Tops

Standard Features

- 32,500 BTU per 18"(457mm) hot top section
- Full-range burner valve control
- · Stainless steel front and sides
- Stainless steel front rail w/position adjustment bar
- 1-1/4" NPT front gas manifold
- Can be installed individually or in a battery
- 6" (152mm) H stainless steel stub back
- 6" (152mm) lchrome steel adj. legs
- Stainless steel oven interior w/ removable porcelain bottom
- 40,000 BTU oven burner
- One chrome placed rack per oven four positions
- Fully insulated oven interior
- 100% safety oven pilot
- Oven thermostat control 150°-500°F (66°-260°C)

Options & Accessories

- Range base convection oven (add RC)
- · Stainless steel back
- Porcelain oven interior in lieu of stainless steel interior NC
- Single or double deck high shelf or back riser
- Modular unit w/ legs & shelf (suffix M)
- Modular unit w/o legs on Refrig. Base (change suffix M to PC)
- Stainless steel intermediate shelf for
 sabinet base
- Stainless steel door(s) for cabinet base
- Continuous plate shelf, 48-72" for battery installations
- Gas shut-off valves 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4"- 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect 3/4", 1", 1 1/4" (Specify)
- Stainless steel legs (set of four)
- Flanged feet set of four
- Set of(4)polyurethane non-marking swivel casters w/front brakes.
- Extra oven rack
- Rear Gas Connection:, 3/4" NPT (max 250,000 BTU's) or 1-1/4" NPT
- Stainless steel burner box top interior

Specifications

U.S. Range Cuisine 36" (914mm) wide Heavy Duty
Range Series. Model _____ with total BTU/hr rating of
____ when used with natural/propane gas. Stainless
steel front and sides. 6" (152mm) legs with adjustable

Ovens - One piece oven door. Stainless steel oven interior with a heavy- duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C). One chrome plated oven rack for standard ovens and three for convection ovens.

18" (457mm) Section Even Heat Hot Tops - 32,500 BTU/hr each burner with one per plate.

Note: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall

NOTE: Ranges suppled with casters must be installed with an approved restraining device.














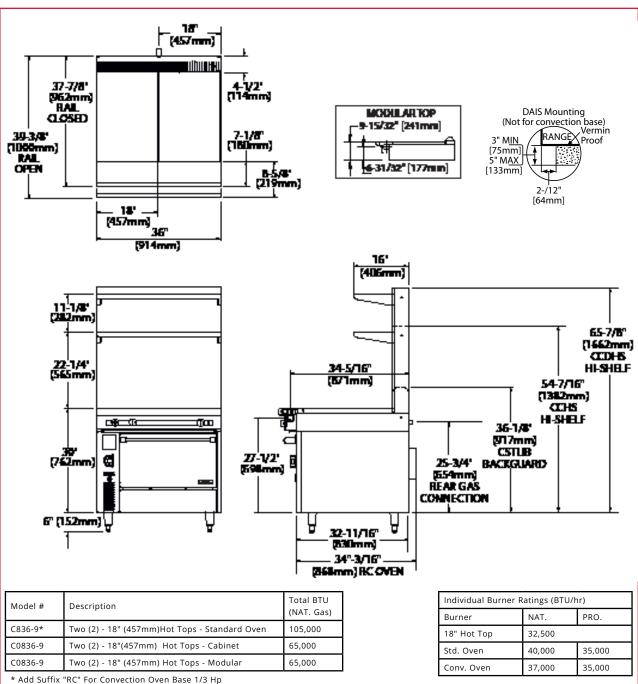

* Add Suffix	"RC" For	Convectio	n Oven Base	1/3 Hp
motor 120V	60Hz 0.6	Amps c/w	Nema 5-15F	cord & plug

Combustible Wall Clearance			
Sides	Back		
6" (152mm)	6" (152mm)		

	10 1100 100	10 1100 100		32,300	
	Std. Oven	Std. Oven			35,000
	Conv. Oven	Conv. Oven			35,000
Interior Dimensions: In (mm)					
Product	Height	Width		De	epth

Interior Dimensions: In (mm)			
Product	Height	Width	Depth
Standard Oven	13-1/2(323)	26-/1/4 (667)	29 (737)
Convection	13-1/2(323)	26-/1/4 (667)	25 (635)
Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)

Gas Pressure	NAT.	PRO.
Min. Supply	7" WC	11" WC
Manifold Operating	6" WC	10" WC
Gas Manifold 1-1/4" NPT		

Welbilt reserves the right to make changes to the design or specifications without prior notice.

