

# Designer Series Gas Fryer

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

## Models

- GD-15F



Model GD-15F

## Standard Features

- Stainless steel front and sides
- 4" (102mm) Sanitary legs
- Easy clean features
- Open pot design, no tubes
- Deep cold zone, keeps contaminants out of cooking area, extending shortening life
- Cold rolled steel frypot
- Front drain ball valve 1" (25.4mm) IPS
- 15 lbs shortening capacity
- 100% safety system
- 1° F snap action thermostat
- Piezo spark ignition
- Rear gas connection w/pressure regulator
- Natural or propane gas
- 45,000 total BTU
- Twin fryer baskets

## Options & Accessories

- Stainless steel back and bottom


Note: Stands are available see form # CS24/CSD

## Specifications

Gas designer series fryer, Model GD-15F; 15" (381mm) wide, 24" (610mm) deep x 20" (508mm) high, easy clean design, with stainless steel front and sides. Steel frypot with open pot design, 15 lbs. shortening capacity and deep cold zone. Exclusive 1° F snap action thermostat. Piezo spark ignition, natural or propane gas, 45,000 total BTU input. Designed as free standing or to be banked with other GD series equipment.




Designer Series Gas Fryer

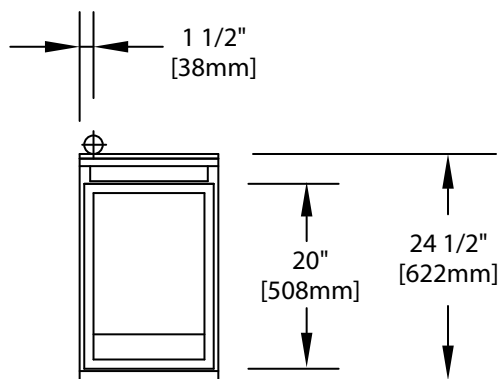

Gas Input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

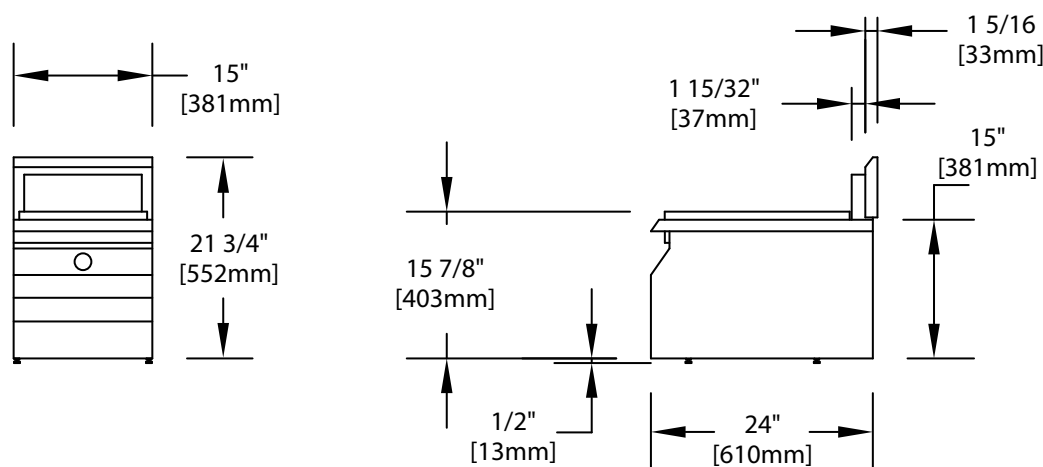

| MODEL   | Over All Dimensions |                 |             | Total Input BTU/Kw | Cu. Ft. | Shipping Wt Lb/kg |
|---------|---------------------|-----------------|-------------|--------------------|---------|-------------------|
|         | Width               | Height          | Depth       |                    |         |                   |
| GD-15F  | 15" (381mm)         | 20" (508mm)     | 24" (610mm) | 45,000/13.2        | 6       | 120/54            |
| GFIR36M | Range Mount         | 35-1/2" (900mm) | GF/GFE36    | 38.2               | 200/91  | 31" (787mm)       |

| Manifold Inlet Size NPT | Manifold Operating Pressure |      |         |      |
|-------------------------|-----------------------------|------|---------|------|
|                         | Natural                     |      | Propane |      |
|                         | "WC                         | mbar | "WC     | mbar |
| 1/2"                    | 4.2                         | 10.5 | 9       | 22.4 |

| Clearances To Combustible Wall |            | Floor or Base   |
|--------------------------------|------------|-----------------|
| Sides                          | Back       |                 |
| 6" (152mm)                     | 6" (152mm) | Non Combustible |

Welbilt reserves the right to make changes to the design or specifications without prior notice.