

GF Sentry Series Infra-Red Salamander Broiler

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- GFIR36M
- GFIR48M
- GFIR60M
- GFIR36CM



Model GFIR36M
 Infra-Red Broilers With
 Pull Out Broiling Rack

Standard Features

- Range Mount Models – stainless steel front, sides, top, backsplash, & bottom w/heat shield
- Counter: model GFIR36CM stainless steel front, sides, & top – C/W 4" (102mm) legs
- 1/2" NPT gas inlet: range mount, standard on top; counter models standard at rear, All models can be ordered with top or rear gas connections, specify at time of order
- Two (2) 20,000 BTU (5.86 kw) atmospheric infra-red burners, each controlled with Hi-Lo valve
- Sentry flame failure protection
- Gas Regulator
- Fixed position broiling rack with flat or easy view tilt position, roll in, roll-out back
- Large capacity removable grease pan

Options & Accessories

- Stainless steel main back.
- Stainless steel main bottom – GFIR36CM
- Brackets for wall mounting and stainless steel bottom w/heat shield – GFIR36CM
- Interconnecting gas piping for range mount


Specifications

Range mount gas infra-red salamander broiler. Two 20,000 BTU (5.86 kw) atmospheric burners, each with a Hi-Lo valve. Fixed position, roll-in, roll out broiling rack with flat or tilt positions. 34" (864mm) wide x 19 3/8" (492mm) deep x 73 11/16" (1872mm) high when mounted on a range. Refer to drawing for detail specifications. 40,000 BTU (11.72 kw) total. Natural or propane gas. Available as counter top or wall mounted models – CFIR36CM.



GF Sentry Series Infra-Red Salamander Broiler

GF Sentry Series Infra-Red Salamander Broiler

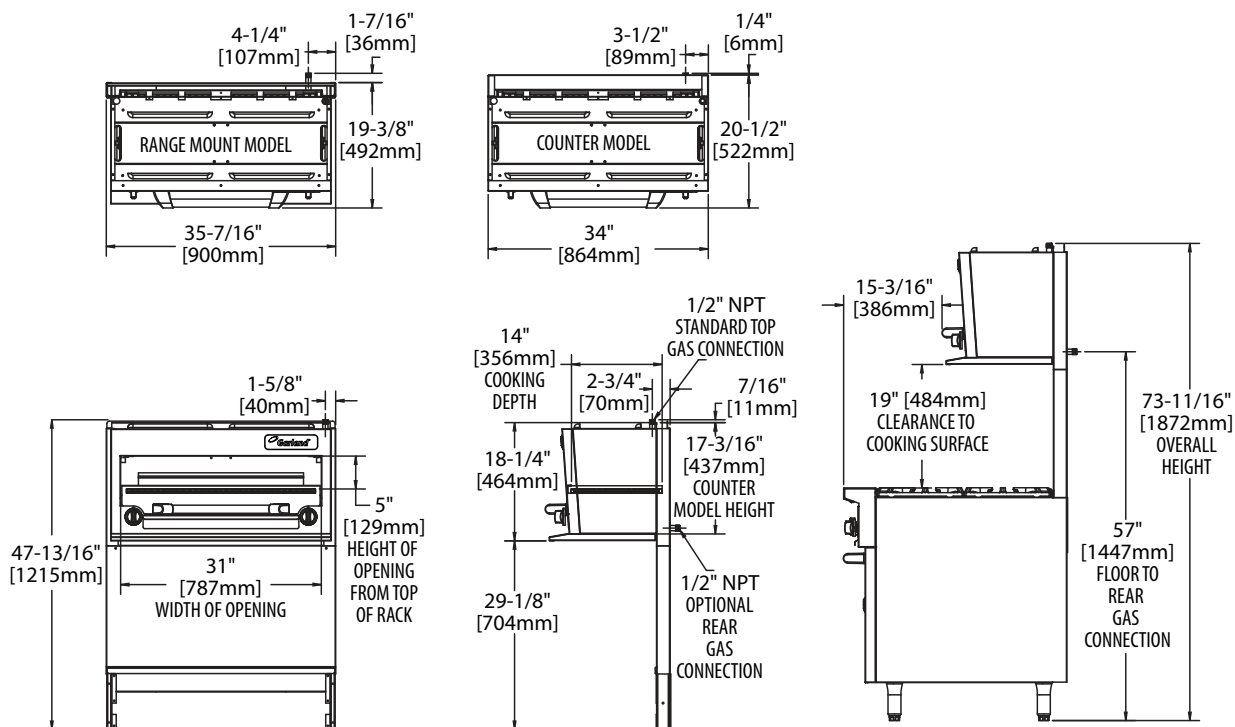

Model #	Description	Width	Use With GF Series Model	Shipping Information		Entry Clearances	
				Cu FT	Lbs/Kg	Crated	Uncrated
GFIR36CM	Counter/Wall Mount	34" (864mm)	N/A	21	170/77	31" (787mm)	21" (533mm)
GFIR36M	Range Mount	35-1/2" (900mm)	GF/GFE36	38.2	200/91	31" (787mm)	21" (533mm)
GFIR48M	Center Mounted Broiler With Extended Flue On Both Sides	47-1/4" (1200mm)	GF/GFE48	60.6	230/105	31" (787mm)	21" (533mm)
*GFIR60M	Broiler With 24"(610 mm) Flue Riser And Shelf	59-1/16" (1500mm)	GF/GFE60	60.6	260/118	31" (787mm)	21" (533mm)

*Note: for range models, salamanders are standard on right but available on the left as an option.
For raised griddle/broiler models, salamanders are only available on left side of the range.

Non-Combustible Clearance				Manifold Operating Pressure	
For use in non-combustible locations only				Natural	Propane
Sides	0 (in/mm)	Back	0 (in/mm)	4"WC(10mbar)	10"WC (25mbar)

Gas input ratings shown here are for installations up to 2,000 ft. (610m) above seal level. Specify altitudes over 2,000 ft.

Garland/U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland / U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications

Please specify gas type when ordering.

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
6934
12/18

