

# Regal Series Infra-Red Cheesemelter

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

## Models

- IRCMA-24      • IRCMA-60
- IRCMA-36      • IRCMA-72
- IRCMA-48



Model shown IRCMA-48

## Standard Features

- Standard Features:
- Infrared gas burners
- One control valve per burner, see back of specification for number of burners for each unit.
- Constant pilot for instant lighting
- Stainless steel top, front, and sides.
- Stainless steel cooking interior sides, back and bottom.
- Removable, chrome-plated wire rack
- Fiberglass insulated sides, bottom, and back
- 24" (610mm) to 72" (1829mm) widths available
- Range, wall and counter top models available; for range mount to U.S. Range Cuisine Series Heavy Duty gas range models.
- 3/4" N.P.T. top gas inlet connection.
- One year parts and labor

## Options & Accessories


- Wall mount kit

## Specifications

Shall be U.S. Range Regal Series Cheesemelter. Unit shall be cuisine series range, wall or counter mounted. Unit to be available in widths from 24" (610mm) to 72" (1829mm) x 17 5/8" (448mm) deep x 18 3/4" (476mm) high. Finish is to be stainless steel font, sides and top. Removable chrome plated round rack. Shelves to be removable round stock chrome plated.



Regal Series Infra-Red Cheesemelter

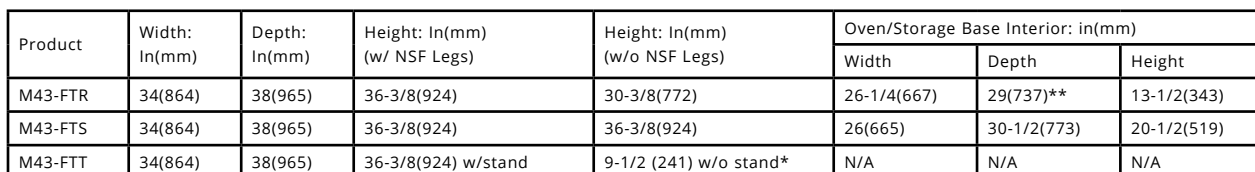

| INPUT-BTU/hr (Natural Gas)                   | M43FTR & M43FTRC | M43FTS & M43FTT |
|----------------------------------------------|------------------|-----------------|
| 6 Top Burners                                |                  |                 |
| 3@18,000(Open Top)*** 3 @ 15,000(Hot Top)*** | 99,000(29.00kW)  | 99,000(29.00kW) |
| BTU Oven***                                  | 40,000(11.72kW)  | N/A             |
| TOTAL                                        | 139,000(40.72kW) | 99,000(29.00kW) |

| INSTALLATION NOTES                       |                                                      |                                                     | Shipping Wt: (Lb/Kg) <sup>2</sup>  |
|------------------------------------------|------------------------------------------------------|-----------------------------------------------------|------------------------------------|
| Combustible Wall Clearances <sup>1</sup> | Entry Clearances                                     | Operating Pressure                                  | M43-FTR 440/200                    |
| Sides: 11" (279mm)<br>Back: 6" (152mm)   | Crated: 39-1/4" (997mm)<br>Uncrated: 34-1/4" (870mm) | Natural: 6" WC (15mbar)<br>Propane: 10" WC (25mbar) | M43-FTS 340/155<br>M43-FTT 250/114 |

www.garland-group.com  
6974  
12/18