



Master Electric Convection Oven

Item: _____
Quantity: _____
Project: _____
Approval: _____
Date: _____

Master Electric Convection Oven

Models:

☐ MCO-ES-10-S ☐ MCO-ES-20-S ☐ MCO-ED-10-S ☐ MCO-ED-20-S



Model MCO-ES-10-S

Standard Features:

- Master 200 Solid State Control with 150° F (66°C) to 500°F (260°C) temperature range and electromechanical timer
- 2-speed fan control (high & low) w/3/4HP fan motor
- Total of 10.4 kW loading per oven cavity
- Stainless steel front, sides, top, and legs
- 60/40 dependent door design with double pane thermal window in both doors and interior lighting
- Full Length, stainless steel positive door closure
- Patented "Safety Door System"
- Porcelain enameled oven interior with coved corners
- 24" cooking cavity height w/6 chrome plated oven racks on 13-position rack guides
- 1 year limited parts & labor warranty (USA & Canada only)

- 5 year limited door warranty, excluding window (USA & Canada only)
- 2 year limited parts & 1 year labor warranty (USA only)
- 2 year limited parts & labor warranty (USA Kindergarten to Grade 12 schools only) • 5 year limited door warranty, excluding window•

Optional Features:

- ☐ Window in left hand door w/ interior lighting
- ☐ Stainless steel solid doors
- ☐ Stainless steel oven interior
- ☐ Extra oven racks
- ☐ 4 swivel casters w/front brakes
- ☐ Low profile casters w/front brakes (double ovens only)
- ☐ Open base with rack guides & shelf (stainless steel)
- ☐ Back enclosure (stainless steel)
- ☐ 460 volt, 3 phase
- ☐ 50 cycle components
- ☐ Maximum security package

Specifications:

Garland Master full-size standard depth or deep depth (Prefix MCO-ED) electric convection oven. 10.4 kW/ oven cavity, 3/4 HP fan motor with two speed fan control. Master 200 Solid State control. Porcelain enameled oven interior with coved corners, Six (6) oven racks and 13-position rack guides. Interior measures 29"(736mm) W x 24" (610mm) H x 24" (610mm) D for standard depth and 29" (736mm) W x 24" (610mm) H x 28" (610mm) D for deep depth. Stainless steel front, sides, top and legs. 60/40 dependent door design with double pane thermal window in both doors and interior lighting. Models with suffix 20-S are double decked. Specify voltage and phase. UL, CUL and NSF Listed.

NOTE: Ovens supplied with casters must be installed with an approved restraining device.



Garland Commercial Ranges Ltd
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668




Model	Interior Dimension (per oven)			Exterior Dimension			Ship Wt./Size	
	W:In(mm)	H:In(mm)	D:In(mm)	W:In(mm)	H:In(mm)	D:In(mm)	Lbs./Kg	Cu Ft
MCO-ES-10-S	29(436)	24(610)	24(610)	38(965)	57-1/2(1416)	41-1/4(1048)	515/230	64
MCO-ES-20-S	29(436)	24(610)	24(610)	38(965)	70-1/2(1791)**	41-1/4(1048)	1030/465	128
MCO-ED-10-S	29(436)	24(610)	28(711)	38(965)	57-1/2(1416)	44-1/2(1130)	545/245	64
MCO-ED-20-S	29(436)	24(610)	28(711)	38(965)	70-1/2(1791)**	44-1/2(1130)	1090/490	128

** Height with or without standard casters. Height with low profile casters (double deck) is 68-1/2" (1740mm).

Model*	Total kW	Nominal Amperes Per Line (includes 3/4 HP fan motor)										
		208v/1Ph	240V/1Ph	208V/3Ph			240V/3Ph			460V/3Ph		
				X	Y	Z	X	Y	Z	X	Y	Z
MCO-ES-10-S	10.4	50	43	30	30	28	26	26	24	14	14	13
MCO-ED-10-S	10.4	50	43	30	30	28	26	26	24	14	14	13

*NOTE: Double deck models with suffix - "20-S" are provided with individual power supply connections

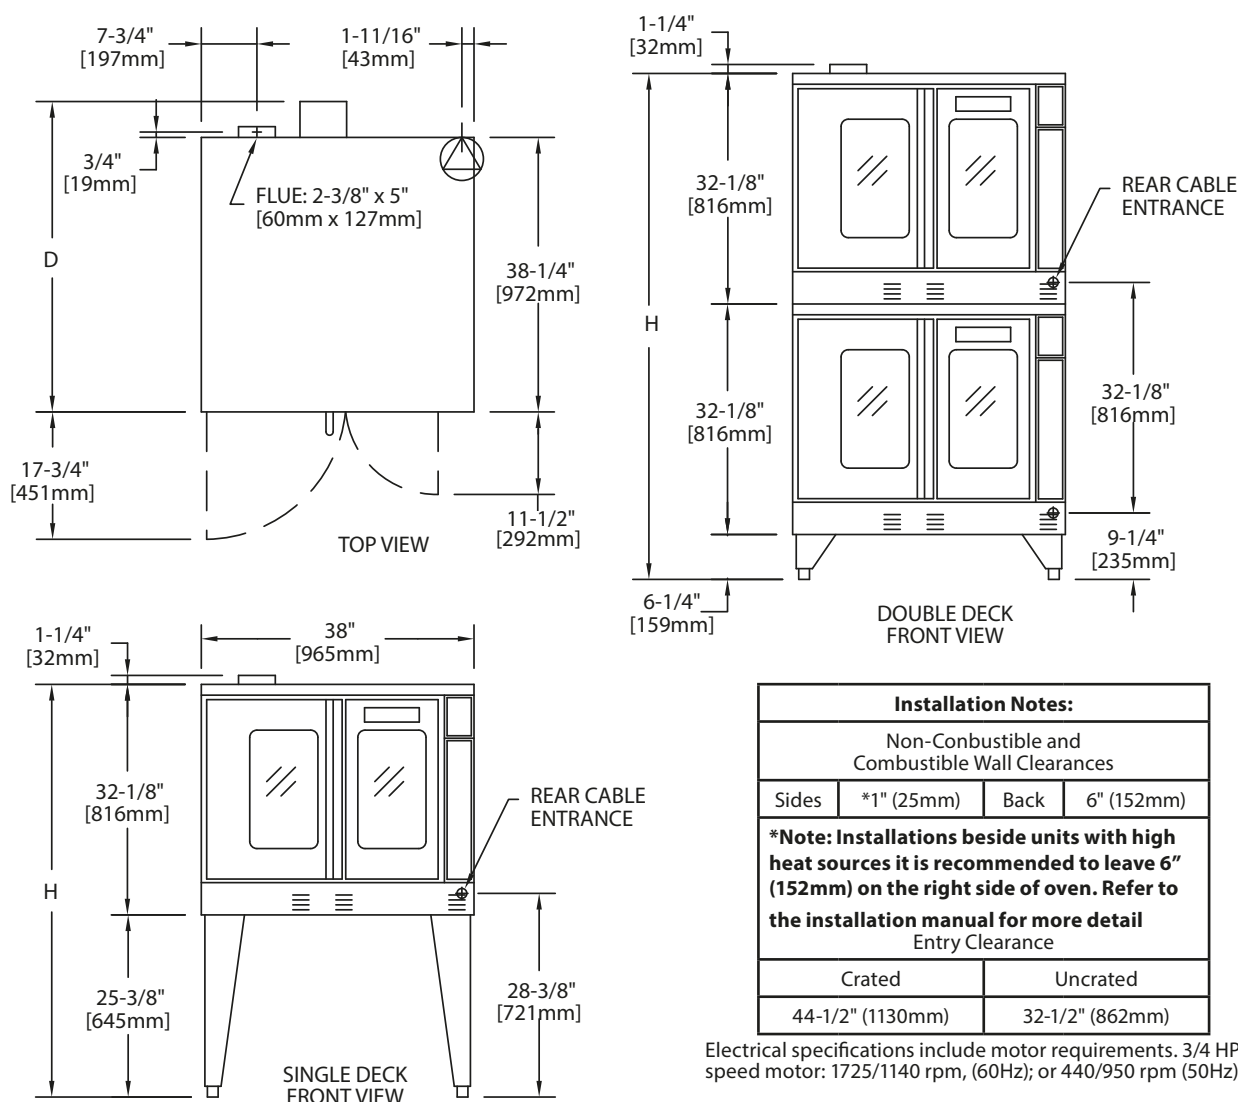

Installation Notes:			
Non-Combustible and Combustible Wall Clearances			
Sides	*1" (25mm)	Back	6" (152mm)
*Note: Installations beside units with high heat sources it is recommended to leave 6" (152mm) on the right side of oven. Refer to the installation manual for more detail Entry Clearance			
Crated		Uncrated	
44-1/2" (1130mm)		32-1/2" (862mm)	

Electrical specifications include motor requirements. 3/4 HP, 2 speed motor: 1725/1140 rpm, (60Hz); or 440/950 rpm (50Hz).

Form# MCO-ES/ED-10/20S (04/14/15)