



**GAS**

OPEN BURNERS | HOT PLATES 31 3/8"

**IMPERIAL**



## IHPA-6-36

Model Numbers

IHPA-2-12

IHPA-4-24

IHPA-6-36

IHPA-8-48

IHPA-10-60



LARGE 5" (127 MM) STAINLESS STEEL LANDING LEDGE FOR CONVENIENT PLATING.

## OPEN BURNERS

- PyroCentric™ 32,000 BTU (9 KW) anti-clogging burner with a 7,000 BTU/hr. (2 KW) low simmer feature. Two rings of flame for even heating.
- Cast iron PyroCentric burners are standard on all IR Series Ranges.
- Burners are anti-clogging and lift-off and separate for easy cleaning.
- No gaskets or screws.
- One standing pilot per burner for instant ignition.

## GRATES

- Top grates feature 2 sections for easy and safe to lift-off for cleaning.
- Grates have a cast-in bowl that directs heat upward.
- Anti-clogging pilot is designed into the grate to shield the pilots from grease and debris.
- Pots slide easily from section to section and onto landing ledge.
- Grates are cast iron for a long service life.


## EXTERIOR FEATURES

- Stainless steel front, sides and landing ledge for cleanability and professional look.
- Welded and polished stainless steel seams.
- Range Match profile when placed on a refrigerated base or equipment stand.
- Stainless steel landing ledge is ideal for plating.
- Control knobs are durable die cast metal for long life.
- Full width, removable crumb tray for easy cleaning.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.




GAS

OPEN BURNERS | HOT PLATES 31 3/8"

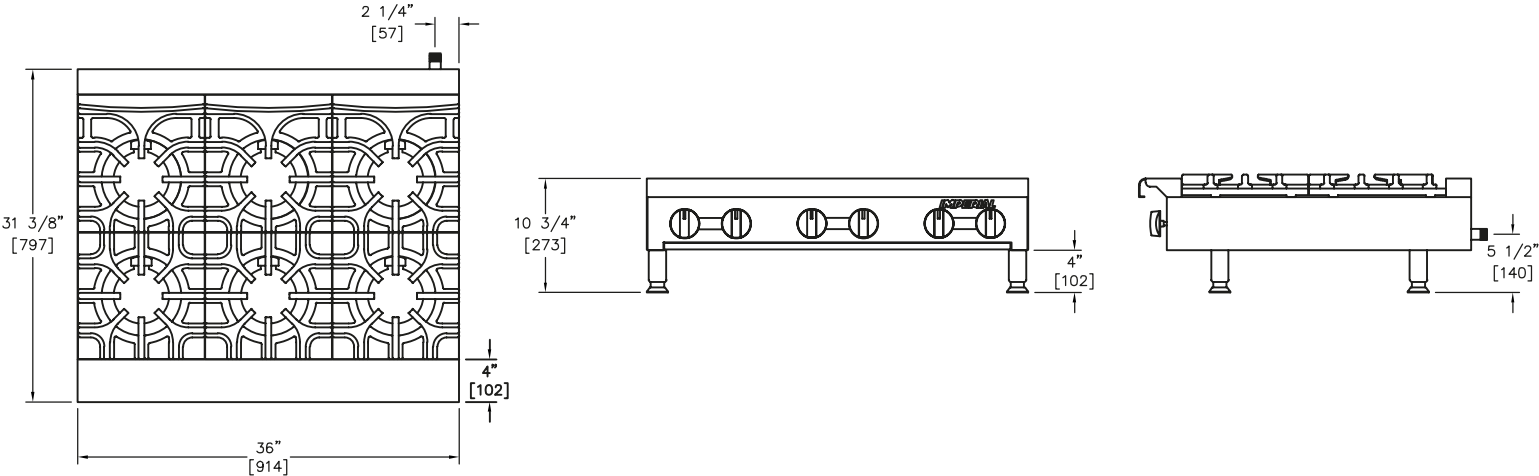

GAS HOT PLATES - 31-3/8" (797 MM) DEPTH

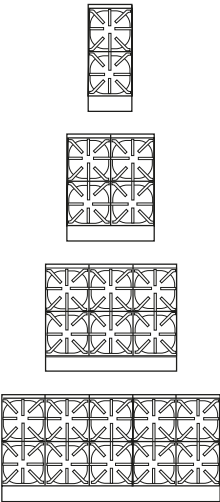

| WIDTH      | MODEL      | OPEN BURNERS | GAS OUTPUT |    | SHIP WEIGHT |     |
|------------|------------|--------------|------------|----|-------------|-----|
|            |            |              | BTU        | KW | KG          | LBS |
| 12" (305)  | IHPA-2-12  | 2            | 64,000     | 19 | 37          | 80  |
| 24"(610)   | IHPA-4-24  | 4            | 128,000    | 38 | 64          | 140 |
| 36" (914)  | IHPA-6-36  | 6            | 192,000    | 56 | 95          | 210 |
| 48" (1219) | IHPA-8-48  | 8            | 256,000    | 75 | 123         | 270 |
| 60" (1524) | IHPA-10-60 | 10           | 320,000    | 94 | 147         | 325 |

| MODEL      | DIMENSIONS                                          | CRATED DIMENSIONS                               |
|------------|-----------------------------------------------------|-------------------------------------------------|
| IHPA-2-12  | 12" W X 31-3/8" D X 10-3/4" H (305 X 797 X 273 MM)  | 14-1/2" W X 34" D X 12" H (368 X 864 X 305 MM)  |
| IHPA-4-24  | 24" W X 31-3/8" D X 10-3/4" H (610 X 797 X 273 MM)  | 26-1/2" W X 34" D X 12" H (673 X 864 X 305 MM)  |
| IHPA-6-36  | 36" W X 31-3/8" D X 10-3/4" H (914 X 797 X 273 MM)  | 38-1/2" W X 34" D X 12" H (978 X 864 X 305 MM)  |
| IHPA-8-48  | 48" W X 31-3/8" D X 10-3/4" H (1219 X 797 X 273 MM) | 50-1/2" W X 34" D X 12" H (1283 X 864 X 305 MM) |
| IHPA-10-60 | 60" W X 31-3/8" D X 10-3/4" H (1524 X 797 X 273 MM) | 62-1/2" W X 34" D X 12" H (1588 X 864 X 305 MM) |

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 10" (254 mm) stainless steel wok ring
- Saute burner head, interchangeable
- Wok burner head, interchangeable
- Stainless steel wok ring
- Gas shut off valve 3/4" N.P.T
- Quick disconnect and flexible gas hose 3/4" N.P.T

CLEARANCE REQUIREMENTS

Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

| MANIFOLD PRESSURE |             |               |
|-------------------|-------------|---------------|
| NATURAL GAS       | PROPANE GAS | MANIFOLD SIZE |
| 5.0" W.C.         | 10.0" W.C.  | 3/4" (19 MM)  |

