


Model Numbers

IGG-24  
IGG-36  
IGG-48  
IGG-60  
IGG-72



Aeration baffles between burners spread heat across the griddle plate for even heating.



Grooved plate provides attractive char-broiled look.



Full width rear flue distributes heat uniformly across the griddle surface.



Stainless steel grease gutter and 1 gal. (3.8 L) grease can.



IGG-36

**BURNERS** - Thermostat maintains selected temperature during peak hours.

- Each griddle burner is rated at 30,000 BTU (9KW).
- Aeration baffles between burners spread the heat evenly across the entire griddle surface.
- Burners are located every 12" (305 mm).
- Each burner has an adjustable gas valve and continuous pilot for instant ignition.

**GRIDDLE PLATE** - Thick 1" (25 mm) thick steel plate is grooved to provide attractive char-broiler marks without actually char-broiling.


- Full 24" (610 mm) plate depth for more cooking surface.
- Surface is ideal for a large range of menu items.

**GREASE MAINTENANCE** - Stainless steel grease gutter is 4" (102 mm) wide.

- Large 1 gal (3.8 L) capacity grease can has a weep hole to indicate when full.
- Grease can removes easily.

**EXTERIOR** - Stainless steel front, sides, splash guard, and ledge.

- Stainless steel ledge is one piece rolled for cleaning convenience.
- Range match profile when placed on a refrigerated base or equipment stand.
- Control knobs are constructed of virtually unbreakable plastic for protection grip.
- 4" (102 mm) stainless steel legs are included.
- One year parts and labor warranty.

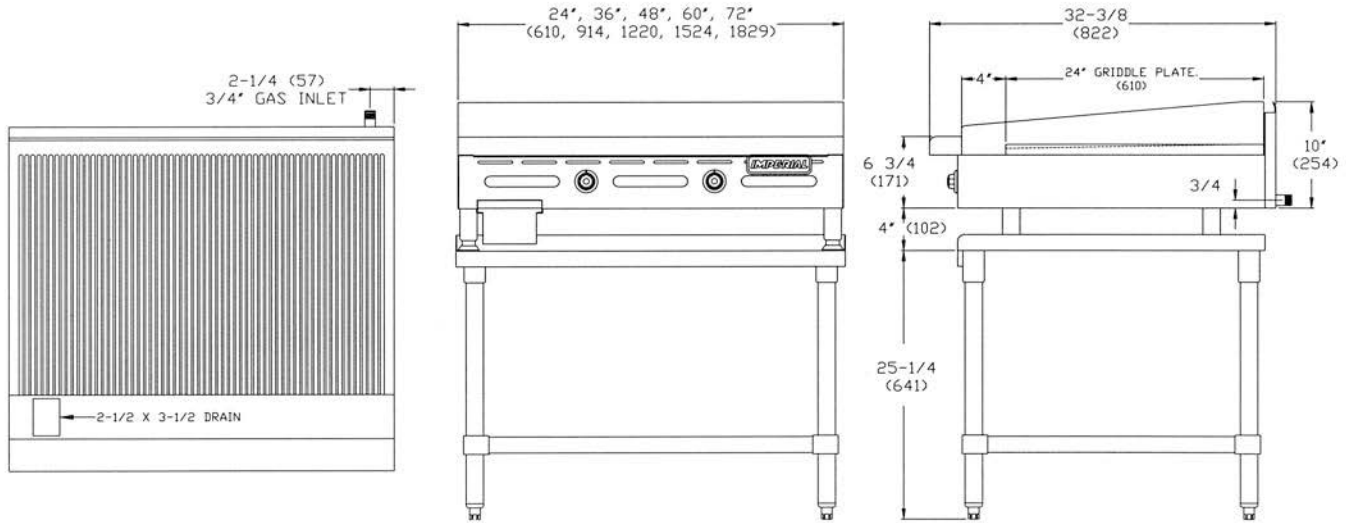

## GROOVED GRIDDLES

| MODEL  | WIDTH         | NUMBER OF BURNERS | GAS OUTPUT BTU | (KW) | SHIP WEIGHT (KG) | LBS |
|--------|---------------|-------------------|----------------|------|------------------|-----|
| IGG-24 | 24" (610 mm)  | 2                 | 60,000         | (18) | (136)            | 300 |
| IGG-36 | 36" (914 mm)  | 3                 | 90,000         | (26) | (195)            | 430 |
| IGG-48 | 48" (1219 mm) | 4                 | 120,000        | (35) | (261)            | 575 |
| IGG-60 | 60" (1524 mm) | 5                 | 150,000        | (44) | (328)            | 725 |
| IGG-72 | 72" (1829 mm) | 6                 | 180,000        | (53) | (396)            | 875 |

Measurements in ( ) are metric equivalents.

| MODEL  | GRIDDLE PLATE DIMENSIONS         | DIMENSIONS                                         | CRATED DIMENSIONS                                      |
|--------|----------------------------------|----------------------------------------------------|--------------------------------------------------------|
| IGG-24 | 24" w x 24" d<br>(610 x 610 mm)  | 24" w x 32-3/8" d x 14" h<br>(610 x 822 x 356 mm)  | 26-1/2" w x 36" d x 16-1/2" h<br>(673 x 914 x 419 mm)  |
| IGG-36 | 36" w x 24" d<br>(914 x 610 mm)  | 36" w x 32-3/8" d x 14" h<br>(914 x 822 x 356 mm)  | 38-1/2" w x 36" d x 16-1/2" h<br>(978 x 914 x 419 mm)  |
| IGG-48 | 48" w x 24" d<br>(1219 x 610 mm) | 48" w x 32-3/8" d x 14" h<br>(1219 x 822 x 356 mm) | 50-1/2" w x 36" d x 16-1/2" h<br>(1283 x 914 x 419 mm) |
| IGG-60 | 60" w x 24" d<br>(1524 x 610 mm) | 60" w x 32-3/8" d x 14" h<br>(1524 x 822 x 356 mm) | 62-1/2" w x 36" d x 16-1/2" h<br>(1588 x 914 x 419 mm) |
| IGG-72 | 72" w x 24" d<br>(1829 x 610 mm) | 72" w x 32-3/8" d x 14" h<br>(1829 x 822 x 356 mm) | 74-1/2" w x 36" d x 16-1/2" h<br>(1892 x 914 x 419 mm) |

| MANIFOLD PRESSURE                    | MANIFOLD SIZE          |
|--------------------------------------|------------------------|
| NATURAL GAS 5.0" W.C.                | PROPANE GAS 10.0" W.C. |
| Specify elevation, if over 2,000 ft. |                        |

### CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

### OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- Open burners available, set of 2 burners, add 12" (305 mm) to width and "OB-2" to model number)
- Open burners available, set of 4 burners, add 24" (610 mm) to width and "OB-4" to model number)
- 7" (178 mm) deep, stainless steel front landing ledge
- 9" (229 mm) deep, stainless steel front landing ledge
- Extra grease can
- Rake for easily cleaning grooves

