

**Model Numbers**

ISPA-18  
ISPA-18-2  
ISP-J-SP  
ISP-J-SP-2  
ISP-18-W  
ISP-J-W-16  
ISP-J-W-13



3-ring burner for high performance cooking.



3-ring burner has 2 adjustable gas valves to control inner and outer rings.



Anti-clogging jet burners produce a cone shaped intense flame.



Steel lever offers maximum control for jet burner.



ISPA-18  
Stock Pot Range



ISP-J-SP  
Hi-Temp Stock Pot Range



ISP-18-W  
Tempura Wok Range



ISP-J-W13  
Mandarin Wok Range

**THREE RING BURNER** - 90,000 BTU (26 KW) total output per burner.

- Heat selections from simmer to high heat
- Burner utilizes two adjustable gas valves for the inner and outer rings.

**JET BURNER** - Anti-clogging 18 tip jet burner, 125,000 BTU (37 KW).

- Intense cone shaped heat.
- Burner has a continuous pilot for instant ignition.
- "L" shaped gas control valve for maximum control.

**WOK TOPS** - Tempura and Mandarin wok styles are available.


- Wok top is all welded 12 gauge steel.
- Welded in 8" (203 mm) h cylinder concentrates and intensifies heat.
- Top removes for cleaning and has a roll front edge for easy loading.
- 13" and 16" (330 and 406 mm) wok top sizes available.
- Mandarin style has a gradual slope design to reduce spill-overs.

**TOP GRATE** - Reinforced cast iron construction.

- Built-in rolled front is easy to load.
- Grate removes for cleaning.

**EXTERIOR FEATURES** - Stainless steel front and sides with welded and finished seams.

- Stainless steel cabinet base for storage.
- Knobs are cast aluminum with Vylox heat protection grip.
- Full width drip pan.
- Heavy duty legs with adjustable feet.
- One year parts and labor warranty.

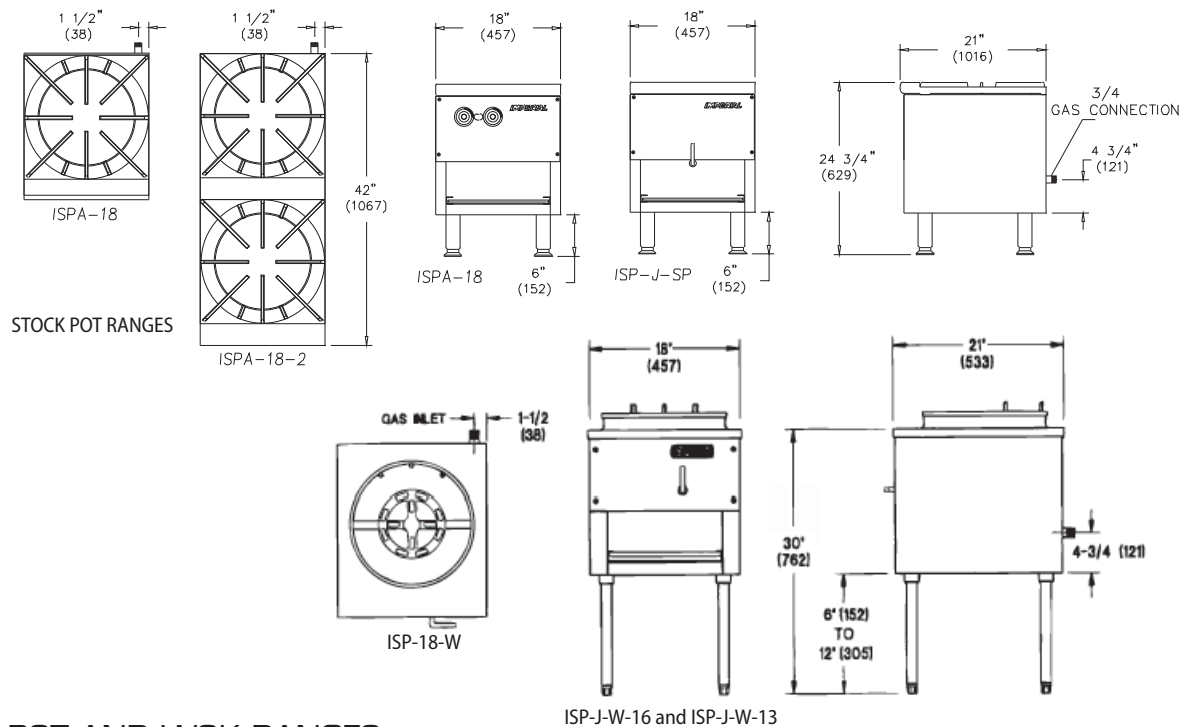

## STOCK POT AND WOK RANGES

| MODEL                          | NUMBER OF BURNERS<br>AND DESCRIPTION | GAS OUTPUT<br>BTU | (KW) | SHIP WEIGHT<br>(KG) | LBS |
|--------------------------------|--------------------------------------|-------------------|------|---------------------|-----|
| <b>STOCK POT RANGE</b>         |                                      |                   |      |                     |     |
| ISPA-18                        | (1) 3-Ring Burner                    | 90,000            | (26) | (57)                | 125 |
| ISPA-18-2                      | (2) 3-Ring Burners                   | 180,000           | (53) | (114)               | 250 |
| <b>HI-TEMP STOCK POT RANGE</b> |                                      |                   |      |                     |     |
| ISP-J-SP                       | (1) Anti-Clogging Jet Burner         | 125,000           | (37) | (57)                | 125 |
| ISP-J-SP-2                     | (2) Anti-Clogging Jet Burners        | 250,000           | (73) | (114)               | 250 |
| <b>TEMPURA WOK RANGE</b>       |                                      |                   |      |                     |     |
| ISP-18-W                       | (1) 3-Ring Burner                    | 90,000            | (26) | (57)                | 125 |
| <b>MANDARIN WOK RANGES</b>     |                                      |                   |      |                     |     |
| ISP-J-W-16                     | (1) Anti-Clogging Jet Burner         | 125,000           | (37) | (57)                | 125 |
| ISP-J-W-13                     | (1) Anti-Clogging Jet Burner         | 125,000           | (37) | (57)                | 125 |

Measurements in ( ) are metric equivalents.

| MODEL      | DIMENSIONS                                      | CRATED DIMENSIONS                               |
|------------|-------------------------------------------------|-------------------------------------------------|
| ISPA-18    | 18" w x 21" d x 24-3/4" h (457 x 533 x 629 mm)  | 20-1/2" w x 25" d x 22" h (521 x 635 x 559 mm)  |
| ISPA-18-2  | 18" w x 42" d x 24-3/4" h (457 x 1067 x 629 mm) | 20-1/2" w x 46" d x 22" h (521 x 1168 x 559 mm) |
| ISP-J-SP   | 18" w x 21" d x 24-3/4" h (457 x 533 x 629 mm)  | 20-1/2" w x 25" d x 22" h (521 x 635 x 559 mm)  |
| ISP-J-SP-2 | 18" w x 42" d x 24-3/4" h (457 x 1067 x 629 mm) | 20-1/2" w x 46" d x 22" h (521 x 1168 x 559 mm) |
| ISP-18-W   | 18" w x 21" d x 30" h (457 x 533 x 762 mm)      | 20-1/2" w x 25" d x 22" h (521 x 635 x 559 mm)  |
| ISP-J-W-16 | 18" w x 21" d x 30" h (457 x 533 x 762 mm)      | 20-1/2" w x 25" d x 22" h (521 x 635 x 559 mm)  |
| ISP-J-W-13 | 18" w x 21" d x 30" h (457 x 533 x 762 mm)      | 20-1/2" w x 25" d x 22" h (521 x 635 x 559 mm)  |

## CLEARANCE REQUIREMENTS

For use only on non-combustible floors with legs or casters. 0" clearance from non-combustible side and rear walls. Provide 6" (152 mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.

| MANIFOLD PRESSURE<br>NATURAL GAS | PROPANE GAS | MANIFOLD<br>SIZE |
|----------------------------------|-------------|------------------|
| 5.0" W.C.                        | 10.0" W.C.  | 3/4"             |

Specify elevation, if over 2,000 ft.

## OPTIONS AND ACCESSORIES

### WOK RANGES

- Interchangeable top with ISPA-18 reinforced cast iron grate
- 13" (330 mm) stainless steel wok top
- 16" (406 mm) stainless steel wok top
- Quick disconnect and flexible gas hose
- 6" (152 mm) casters, set of 4, 2 with brakes

### STOCK POT RANGES

- Extra Reinforced cast iron grate
- Additional control for 3-ring burner
- Extra 13" (330 mm) or 16" (406 mm) stainless steel wok top
- Interchangeable top with ISP-18-W wok cylinder
- Side-by-side range orientation in lieu of front-to-back (available at an additional charge)
- Quick disconnect and flexible gas hose
- 6" (152 mm) casters, set of 4, 2 with brakes

