

**Model Number**

|           |            |
|-----------|------------|
| IFSCB175E | IFSCB175EU |
| IFSCB275E | IFSCB275EU |
| IFSCB375E | IFSCB375EU |
| IFSCB475E | IFSCB475EU |
| IFSCB575E | IFSCB575EU |
| IFSCB675E | IFSCB675EU |

Add suffix "T" for Electronic Thermostat

Add suffix "C" for Computer Controls

Suffix "E" denotes Immersed Elements

Suffix "EU" denotes Tilt-up Elements



Filter is located under fryers to save valuable space.



Filter pan is designed for maximum oil return.



5.5 GPM, 1/3 HP roller pump speeds up filtering process.



Side Car includes a stainless steel cabinet with a drain area, food warmer and dump pan.



IFSCB275EU

**FILTER PACKAGE CHOICES** - Up to six fryers can be battered into one fryer / filter system.

- Available for 50 and 75 lb. (27 and 41 Liters) oil capacity fryers.
- Available with Snap Action Thermostats, Electronic Thermostats or Computer Controls

**LOCATED UNDER FRYERS** - Filter location under fryers saves valuable space.

- Internally plumbed oil drain and return line.

**UNIQUE FILTER PAN DESIGN** - Filter pan is designed for maximum oil return.

- Stainless steel construction is easy to clean and has a professional look.
- Positive-latching filter paper holder holds paper in place for optimal filtration.
- Quick disconnect connection offers quick and safe connection of the filtered oil back into the frypots.
- All oil drain and return lines are internally plumbed for convenience and safety.

**ROLLER-PUMP** - Up to six fryers can be battered into one fryer / filter system.


- 5.5 GPM pump with a 1/3 HP motor speeds up filtering process.
- Can pump oil into a disposal vat up to 20 feet away.

**DRAIN STATION** - Includes a matching stainless steel cabinet with a food warmer and dump pan.

- Cabinet may be located anywhere within the fryer battery.
- Cabinet is a convenient storage area when located at the end of the battery.

**EXTERIOR FEATURES** - Continuous cabinet provides a professional look.

- 5" (127 mm) deep continuous stainless steel front landing ledge.
- Stainless steel precision welded frypot.
- Includes casters, joiner strips and filter starter kit.

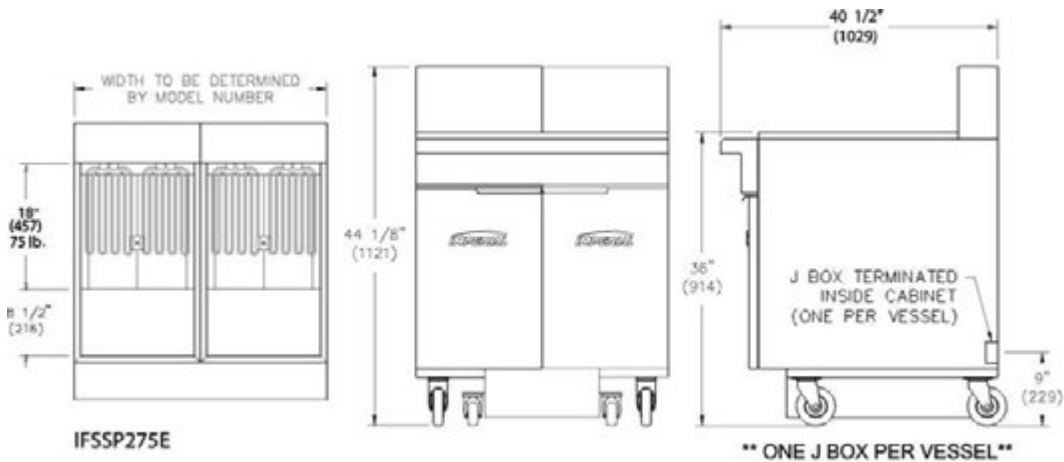

| MODEL      | FRYER OIL CAPACITY | OVERALL WIDTH      | NUMBER OF FRYERS | SHIP WEIGHT (KG) | LBS  |
|------------|--------------------|--------------------|------------------|------------------|------|
| IFSCB175E  | 75 lbs. (51 L)     | 39" (911 mm)       | 1                | (217)            | 480  |
| IFSCB175EU | 75 lbs. (51 L)     | 39" (911 mm)       | 1                | (217)            | 480  |
| IFSCB275E  | 75 lbs. (51 L)     | 58-1/2" (1486 mm)  | 2                | (327)            | 720  |
| IFSCB275EU | 75 lbs. (51 L)     | 58-1/2" (1486 mm)  | 2                | (327)            | 720  |
| IFSCB375E  | 75 lbs. (51 L)     | 78" (1981 mm)      | 3                | (449)            | 990  |
| IFSCB375EU | 75 lbs. (51 L)     | 78" (1981 mm)      | 3                | (449)            | 990  |
| IFSCB475E  | 75 lbs. (51 L)     | 97-1/2" (2477 mm)  | 4                | (572)            | 1260 |
| IFSCB475EU | 75 lbs. (51 L)     | 97-1/2" (2477 mm)  | 4                | (572)            | 1260 |
| IFSCB575E  | 75 lbs. (51 L)     | 117" (2972 mm)     | 5                | (694)            | 1530 |
| IFSCB575EU | 75 lbs. (51 L)     | 117" (2972 mm)     | 5                | (694)            | 1530 |
| IFSCB675E  | 75 lbs. (51 L)     | 136-1/2" (3467 mm) | 6                | (816)            | 1800 |
| IFSCB675EU | 75 lbs. (51 L)     | 136-1/2" (3467 mm) | 6                | (816)            | 1800 |

Measurements in ( ) are metric equivalents.

| MODEL      | DIMENSIONS                                                    | CRATED DIMENSIONS                                         |
|------------|---------------------------------------------------------------|-----------------------------------------------------------|
| IFSCB175E  | 39" w x 40-1/2" d x 44-1/8" h<br>(911 x 1029 x 1121 mm)       | 40-1/2" w x 43" d x 49-1/2" h<br>(1029 x 1092 x 1257 mm)  |
| IFSCB175EU | 39" w x 40-1/2" d x 44-1/8" h<br>(911 x 1029 x 1121 mm)       | 40-1/2" w x 43" d x 49-1/2" h<br>(1029 x 1092 x 1257 mm)  |
| IFSCB275E  | 58-1/2" w x 40-1/2" d x 44-1/8" h<br>(1486 x 1029 x 1121 mm)  | 60" w x 43" d x 49-1/2" h<br>(1524 x 1092 x 1257 mm)      |
| IFSCB275EU | 58-1/2" w x 40-1/2" d x 44-1/8" h<br>(1486 x 1029 x 1121 mm)  | 60" w x 43" d x 49-1/2" h<br>(1524 x 1092 x 1257 mm)      |
| IFSCB375E  | 78" w x 40-1/2" d x 44-1/8" h<br>(1981 x 1029 x 1121 mm)      | 79-1/2" w x 43" d x 49-1/2" h<br>(2019 x 1092 x 1257 mm)  |
| IFSCB375EU | 78" w x 40-1/2" d x 44-1/8" h<br>(1981 x 1029 x 1121 mm)      | 79-1/2" w x 43" d x 49-1/2" h<br>(2019 x 1092 x 1257 mm)  |
| IFSCB475E  | 97-1/2" w x 40-1/2" d x 44-1/8" h<br>(2477 x 1029 x 1121 mm)  | 99" w x 43" d x 49-1/2" h<br>(2515 x 1092 x 1257 mm)      |
| IFSCB475EU | 97-1/2" w x 40-1/2" d x 44-1/8" h<br>(2477 x 1029 x 1121 mm)  | 99" w x 43" d x 49-1/2" h<br>(2515 x 1092 x 1257 mm)      |
| IFSCB575E  | 117" w x 40-1/2" d x 44-1/8" h<br>(2972 x 1029 x 1121 mm)     | 118-1/2" w x 43" d x 49-1/2" h<br>(3010 x 1092 x 1257 mm) |
| IFSCB575EU | 117" w x 40-1/2" d x 44-1/8" h<br>(2972 x 1029 x 1121 mm)     | 118-1/2" w x 43" d x 49-1/2" h<br>(3010 x 1092 x 1257 mm) |
| IFSCB675E  | 136-1/2" w x 40-1/2" d x 44-1/8" h<br>(3467 x 1029 x 1121 mm) | 138" w x 43" d x 49-1/2" h<br>(3505 x 1092 x 1257 mm)     |
| IFSCB675EU | 136-1/2" w x 40-1/2" d x 44-1/8" h<br>(3467 x 1029 x 1121 mm) | 138" w x 43" d x 49-1/2" h<br>(3505 x 1092 x 1257 mm)     |

#### FILTER ELECTRICAL REQUIREMENT

| VOLTS | PHASE | HERTZ | AMPS     |
|-------|-------|-------|----------|
| 115 V | 1     | 60    | 6.8 amps |

#### ELECTRICAL REQUIREMENT PER FRYER

| MODEL   | VOLTS | PHASE | HERTZ | AMPS  |
|---------|-------|-------|-------|-------|
| 75 lbs. | 208   | 3     | 60    | 50.02 |
| 75 lbs. | 240   | 3     | 60    | 43.35 |
| 75 lbs. | 480   | 3     | 60    | 21.68 |

\* For export only

#### CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

#### OPTIONS AND ACCESSORIES

- Automatic basket lifts with computerized controls
- Manual controlled basket lifts
- Stainless steel tank cover
- Stainless steel side drain shelf
- Stainless steel side splash
- Manual timer
- Filter paper 40# thickness, 20 microns, 100 sheets per box

