

**Model Number**


|           |            |
|-----------|------------|
| IFSCB150E | IFSCB150EU |
| IFSCB250E | IFSCB250EU |
| IFSCB350E | IFSCB350EU |
| IFSCB450E | IFSCB450EU |
| IFSCB550E | IFSCB550EU |
| IFSCB650E | IFSCB650EU |

Add suffix "T" for Electronic Thermostat

Add suffix "C" for Computer Controls

Suffix "E" denotes Immersed Elements

Suffix "EU" denotes Tilt-up Elements



Filter is located under fryers to save valuable space.



Filter pan is designed for maximum oil return.



5.5 GPM, 1/3 HP roller pump speeds up filtering process.



Side Car includes a stainless steel cabinet with a drain area, food warmer and dump pan.



IFSCB250EU

**FILTER PACKAGE CHOICES** - Up to six fryers can be battered into one fryer / filter system.

- Available for 50 and 75 lb. (27 and 41 Liters) oil capacity fryers.
- Available with Snap Action Thermostats, Electronic Thermostats or Computer Controls

**LOCATED UNDER FRYERS** - Filter location under fryers saves valuable space.

- Internally plumbed oil drain and return line.

**UNIQUE FILTER PAN DESIGN** - Filter pan is designed for maximum oil return.

- Stainless steel construction is easy to clean and has a professional look.
- Positive-latching filter paper holder holds paper in place for optimal filtration.
- Quick disconnect connection offers quick and safe connection of the filtered oil back into the frypots.
- All oil drain and return lines are internally plumbed for convenience and safety.

**ROLLER-PUMP** - Up to six fryers can be battered into one fryer / filter system.


- 5.5 GPM pump with a 1/3 HP motor speeds up filtering process.
- Can pump oil into a disposal vat up to 20 feet away.

**DRAIN STATION** - Includes a matching stainless steel cabinet with a food warmer and dump pan.

- Cabinet may be located anywhere within the fryer battery.
- Cabinet is a convenient storage area when located at the end of the battery.

**EXTERIOR FEATURES** - Continuous cabinet provides a professional look.

- 5" (127 mm) deep continuous stainless steel front landing ledge.
- Stainless steel precision welded frypot.
- Includes casters, joiner strips and filter starter kit.

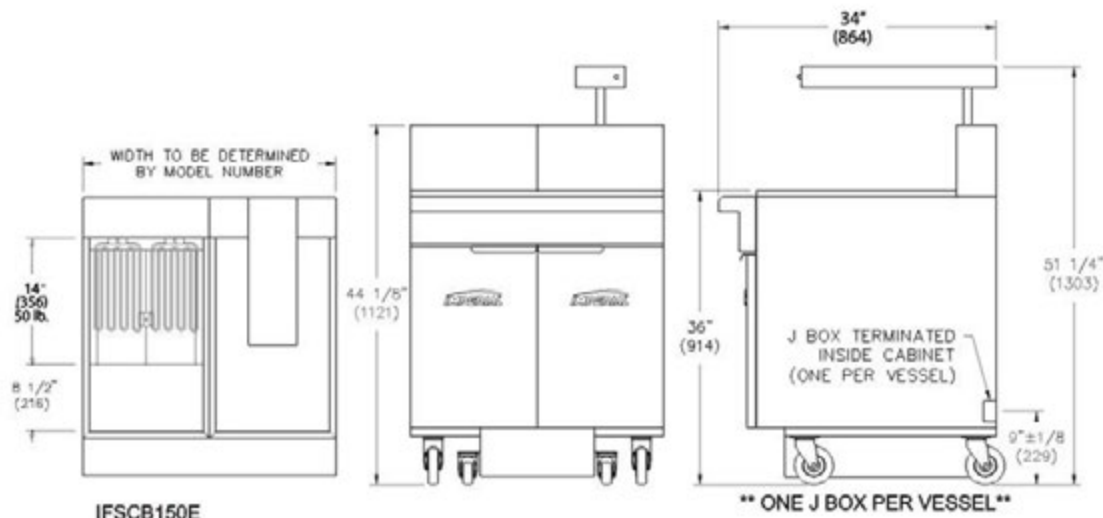

| MODEL      | FRYER<br>OIL CAPACITY | OVERALL<br>WIDTH   | NUMBER<br>OF FRYERS | SHIP WEIGHT<br>(KG) | LBS   |
|------------|-----------------------|--------------------|---------------------|---------------------|-------|
| IFSCB150E  | 50 lbs. (41 L)        | 31" (787 mm)       | 1                   | (196)               | 433   |
| IFSCB150EU |                       |                    |                     |                     |       |
| IFSCB250E  | 50 lbs. (41 L)        | 46-1/2" (1181 mm)  | 2                   | (311)               | 626   |
| IFSCB250EU |                       |                    |                     |                     |       |
| IFSCB350E  | 50 lbs. (41 L)        | 62" (1575 mm)      | 3                   | (426)               | 393   |
| IFSCB350EU |                       |                    |                     |                     |       |
| IFSCB450E  | 50 lbs. (41 L)        | 77-1/2" (1969 mm)  | 4                   | (541)               | 1,092 |
| IFSCB450EU |                       |                    |                     |                     |       |
| IFSCB550E  | 50 lbs. (41 L)        | 93" (2362 mm)      | 5                   | (655)               | 1445  |
| IFSCB550EU |                       |                    |                     |                     |       |
| IFSCB650E  | 50 lbs. (41 L)        | 108-1/2" (2756 mm) | 6                   | (770)               | 1698  |
| IFSCB650EU |                       |                    |                     |                     |       |

Measurements in ( ) are metric equivalents.

| MODEL      | DIMENSIONS                                               | CRATED DIMENSIONS                                       |
|------------|----------------------------------------------------------|---------------------------------------------------------|
| IFSCB150E  | 31" w x 34" d x 44-1/8" h<br>(787 x 864 x 1121 mm)       | 32-1/2" w x 39" d x 49-1/2" h<br>(826 x 991 x 1257 mm)  |
| IFSCB150EU |                                                          |                                                         |
| IFSCB250E  | 46-1/2" w x 34" d x 44-1/8" h<br>(1181 x 864 x 1121 mm)  | 48" w x 39" d x 49-1/2" h<br>(1219 x 991 x 1257 mm)     |
| IFSCB250EU |                                                          |                                                         |
| IFSCB350E  | 62" w x 34" d x 44-1/8" h<br>(1575 x 864 x 1121 mm)      | 63-1/2" w x 39" d x 49-1/2" h<br>(1613 x 991 x 1257 mm) |
| IFSCB350EU |                                                          |                                                         |
| IFSCB450E  | 77-1/2" w x 34" d x 44-1/8" h<br>(1969 x 864 x 1121 mm)  | 79" w x 39" d x 49-1/2" h<br>(2007 x 991 x 1257 mm)     |
| IFSCB450EU |                                                          |                                                         |
| IFSCB550E  | 93" w x 34" d x 44-1/8" h<br>(2362 x 864 x 1121 mm)      | 94-1/2" w x 39" d x 49-1/2" h<br>(2400 x 991 x 1257 mm) |
| IFSCB550EU |                                                          |                                                         |
| IFSCB650E  | 108-1/2" w x 34" d x 44-1/8" h<br>(2756 x 864 x 1121 mm) | 110" w x 39" d x 49-1/2" h<br>(2794 x 991 x 1257 mm)    |
| IFSCB650EU |                                                          |                                                         |

| FILTER ELECTRICAL REQUIREMENT |       |       |          |
|-------------------------------|-------|-------|----------|
| VOLTS                         | PHASE | HERTZ | AMPS     |
| 115 V                         | 1     | 60    | 6.8 amps |

| ELECTRICAL REQUIREMENT PER FRYER |       |       |       |       |
|----------------------------------|-------|-------|-------|-------|
| MODEL                            | VOLTS | PHASE | HERTZ | AMPS  |
| 50 lbs.                          | 208   | 3     | 60    | 42.38 |
| 50 lbs.                          | 240   | 3     | 60    | 36.73 |
| 50 lbs.                          | 480*  | 3     | 60    | 18.36 |

\* For export only

## CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

## OPTIONS AND ACCESSORIES

- Automatic basket lifts with computerized controls
- Manual controlled basket lifts
- Stainless steel tank cover
- Stainless steel side drain shelf
- Stainless steel side splash
- Manual timer
- Filter paper 40# thickness, 20 microns, 100 sheets per box

