

**Model Numbers**

IR-10-E      IR-10-E-XB  
IR-10-E-CC      IR-6-G24T-E  
IR-4-G36T-E



9" (229 mm) sealed round plate elements with easy to clean flat surface.



5 KW element provides even heating throughout the oven cavity.



Splatter screen protects the element from spills.



Large 5" (127 mm) stainless steel landing ledge for convenient plating.



Durable cast aluminum with a Valox™ heat protection grip.



IR-10-E shown with optional casters

**ROUND PLATE ELEMENTS** - 2 KW round plate elements with easy-to-clean flat surface.

- Provides a solid flat surface for fast, even heating.
- Plates are 9" (229) diameter for maximum pan contact.
- Solid top prevents spills from entering unit making clean-up easy.
- Infinite heat controls for maximum cooking flexibility.

**GRIDDLE TOP** - Thick highly polished 3/4" (19 mm) steel plate with thermostat controls.

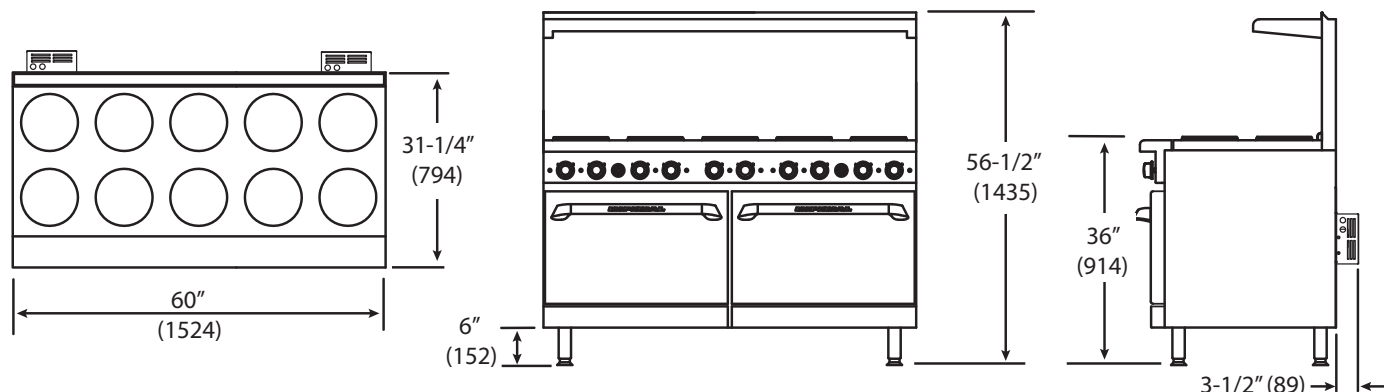
- 21" (533 mm) plate depth.
- Even heating elements across the griddle section provide consistent temperature across the plate.
- 4" (102 mm) wide grease trough and removable grease can for easy cleaning.
- Large griddle grease can is removable for easy cleaning.

**STANDARD OVEN** - High performance 5.3 KW element provides even heating throughout the oven interior.






- Unique baffle above the element distributes heat flow to provide even cooking temperatures. Splatter screen protects the element from spills.
- Chef depth standard oven interior accommodates standard 18" x 26" (457 x 660 mm) sheet pans front-to-back and side-by side.
- Oven is 26½" w x 26" d x 14" h (673 x 660 x 356 mm).
- Heavy duty thermostat with temperature range from 150°F to 500°F (65°C to 260°C).
- Porcelainized sides, rear, deck and door lining.
- Stamped inner door liner provides extra strength while optimizing heat retention.
- One chrome oven rack is included.

**CONVECTION OVEN** - 5.3 KW convection oven with 1/4 hp blower motor cooks products quickly and evenly with less shrinkage.

- Convection oven interior dimensions 26-1/2" w x 22-1/2" d x 14" h (673 x 572 x 356 mm).
- Three position switch for cooking or cool down. Fan shuts off automatically when door is open.
- Porcelainized sides, rear, deck and door lining for easy cleaning.
- Three chrome oven racks included.



## 60" ELECTRIC RANGES

| TOP                                                                                | MODEL       | NUMBER OF PLATES | GRIDDLE WIDTH | SHIP WEIGHT (KW) LBS |
|------------------------------------------------------------------------------------|-------------|------------------|---------------|----------------------|
|    | IR-10-E     | 10               | N/A           | (444) 980            |
|    | IR-10-E-XB  | 10               | N/A           | (425) 940            |
|   | IR-10-E-CC  | 10               | N/A           | (493) 1090           |
|  | IR-6-G24T-E | 6                | 24" (610 mm)  | (480) 1060           |
|  | IR-4-G36T-E | 4                | 36" (914 mm)  | (491) 1085           |

Measurements in ( ) are metric equivalents

### NOTES

- "XB" specifies (1) Standard Oven and (1) Open Cabinet Base
- "CC" specifies (2) Convection Ovens
- "G" specifies Griddle Top
- "T" specifies Thermostat Controls

### EXTERIOR

- Stainless steel front, sides, backguard, shelf, landing ledge and kick plate
- Welded and polished stainless steel seams
- Large 5" (127 mm) stainless steel landing ledge
- Control knobs are durable cast aluminum with a heat protection grip
- 6" (152 mm) heavy duty legs with adjustable feet
- One year parts and labor warranty

### DIMENSIONS

60" w x 31-1/4" d x 36" h\*  
(1524 x 794 x 914 mm)

\* to cooktop

### CRATED DIMENSIONS

62-1/2" w x 39" d x 35" h  
(1588 x 991 x 889 mm)

### CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2" (51 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

### 60" WIDE RANGES ELECTRICAL REQUIREMENTS

| Model       | Total KW | Volts | Ph | Amps | J-Box "A" | Amps | J-Box "B" |
|-------------|----------|-------|----|------|-----------|------|-----------|
| IR-10-E     | 30.6     | 208   | 1  | 74   | 74        |      |           |
|             | 30.6     | 208   | 3  | 43   | 43        |      |           |
|             | 30.6     | 240   | 1  | 64   | 64        |      |           |
|             | 30.6     | 240   | 3  | 37   | 37        |      |           |
|             | 30.6     | 480   | 3  | 19   | 19        |      |           |
| IR-10-E-XB  | 25.3     | 208   | 1  | 49   | 74        |      |           |
|             | 25.3     | 208   | 3  | 43   | 38        |      |           |
|             | 25.3     | 240   | 1  | 42   | 64        |      |           |
|             | 25.3     | 240   | 3  | 37   | 33        |      |           |
|             | 25.3     | 480   | 3  | 19   | 17        |      |           |
| IR-10-E-CC  | 33.6     | 208   | 1  | 81   | 81        |      |           |
|             | 33.6     | 208   | 3  | 47   | 47        |      |           |
|             | 33.6     | 240   | 1  | 70   | 70        |      |           |
|             | 33.6     | 240   | 3  | 41   | 41        |      |           |
|             | 33.6     | 480   | 3  | 21   | 21        |      |           |
| IR-6-G24T-E | 25.3     | 208   | 1  | 84   | 55        |      |           |
|             | 25.3     | 208   | 3  | 51   | 32        |      |           |
|             | 25.3     | 240   | 1  | 72   | 47        |      |           |
|             | 25.3     | 240   | 3  | 44   | 27        |      |           |
|             | 25.3     | 480   | 3  | 22   | 14        |      |           |
| IR-4-G36T-E | 25.3     | 208   | 1  | 64   | 69        |      |           |
|             | 25.3     | 208   | 3  | 38   | 42        |      |           |
|             | 25.3     | 240   | 1  | 56   | 60        |      |           |
|             | 25.3     | 240   | 3  | 33   | 36        |      |           |
|             | 25.3     | 480   | 3  | 17   | 18        |      |           |

- Available in 208 and 240 volts, 1 and 3 phase.
- Please indicate at time of order

### OPTIONS AND ACCESSORIES

- 6" (152 mm) stainless steel stub back, in lieu of standard backguard
- 11" (279 mm) stainless steel stub back, in lieu of standard backguard
- Reinforcement channels for mounting cheesemelter or salamander
- Extra oven racks
- Chrome griddle top
- 6" (152 mm) casters
- 480 volts, 3 phase

