

Model Numbers

IR-4-E

IR-4-E-XB



9" (229 mm) sealed round plate elements with easy to clean flat surface.



5 KW element provides even heating throughout the oven cavity.



Splatter screen protects the element from spills.



Large 5" (127 mm) stainless steel landing ledge for convenient plating.



Durable cast aluminum with a Valox™ heat protection grip.



IR-4-E shown with optional casters


#### ROUND PLATE ELEMENTS - 2 KW round plate elements with easy-to-clean flat surface.

- Provides a solid flat surface for fast, even heating.
- Plates are 9" (229) diameter for maximum pan contact.
- Solid top prevents spills from entering unit making clean-up easy.
- Infinite heat controls for maximum cooking flexibility.

#### SPACE SAVER OVEN - High performance 5.3 KW element provides even heating throughout the oven interior.

- Unique baffle above the element distributes heat flow to provide even cooking temperatures throughout the 5 KW oven.
- Splatter screen protects the element from spills.
- Space saver oven interior accommodates standard 18" x 26" (457 x 660 mm) sheet pans front-to-back.
- Oven is 20" w x 26" d x 14" h (508 w x 660 d x 356 h mm).
- Heavy duty thermostat with temperature range from 150°F to 500°F (65°C to 260°C).
- Porcelainized sides, rear, deck and door lining.
- Stamped inner door liner provides extra strength while optimizing heat retention.
- One chrome oven rack is included.



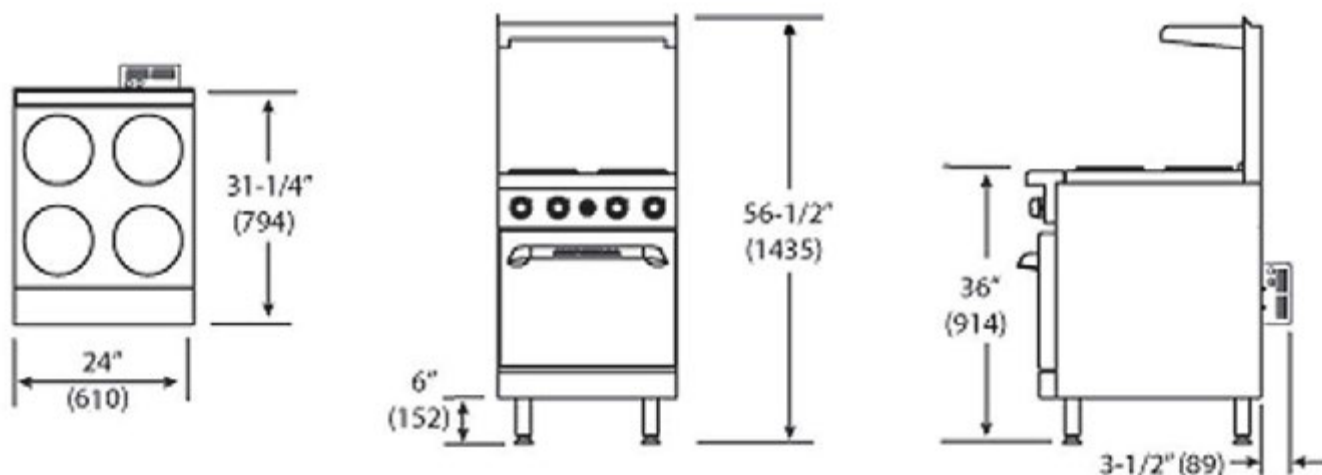

## 24" ELECTRIC RANGES

| TOP                                                                                | MODEL     | NUMBER OF PLATES | OVEN WIDTH   | SHIP WEIGHT (KW) LBS |
|------------------------------------------------------------------------------------|-----------|------------------|--------------|----------------------|
|   | IR-4-E    | 4                | 20" (508 mm) | (210) 465            |
|  | IR-4-E-XB | 4                | N/A          | (184) 405            |

Measurements in ( ) are metric equivalents

### NOTES

- "XB" specifies Open Cabinet Base

### EXTERIOR

- Stainless steel front, sides, backguard, shelf, landing ledge and kick plate
- Welded and polished stainless steel seams
- Large 5" (127 mm) stainless steel landing ledge
- Control knobs are durable cast aluminum with a heat protection grip
- 6" (152 mm) heavy duty legs with adjustable feet
- One year parts and labor warranty

### DIMENSIONS

24" w x 31-1/4" d x 36" h\*  
(610 x 794 x 914 mm)

\* to cooktop

### CRATED DIMENSIONS

26-1/2" w x 39" d x 35" h  
(673 x 991 x 889 mm)

### CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2" (51 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

### 24" WIDE RANGES ELECTRICAL REQUIREMENTS

| Model     | Total KW | Volts | Ph | Amps |
|-----------|----------|-------|----|------|
| IR-4-E    | 13.3     | 208   | 1  | 64   |
|           | 13.3     | 208   | 3  | 38   |
|           | 13.3     | 240   | 1  | 56   |
|           | 13.3     | 240   | 3  | 33   |
|           | 13.3     | 480   | 3  | 17   |
| IR-4-E-XB | 8        | 208   | 1  | 39   |
|           | 8        | 208   | 3  | 23   |
|           | 8        | 240   | 1  | 24   |
|           | 8        | 240   | 3  | 25   |
|           | 8        | 480   | 3  | 13   |

- Available in 208 and 240 volts, 1 and 3 phase.  
Please indicate at time of order

### OPTIONS AND ACCESSORIES

- 6" (152 mm) stainless steel stub back, in lieu of standard backguard
- 11" (279 mm) stainless steel stub back, in lieu of standard backguard
- Reinforcement channels for mounting cheesemelter or salamander
- Extra oven racks
- 6" (152 mm) casters
- 480 volts, 3 phase

