

## Model

☐ e5-1530



## Standard Features

- Advanced Cooking Technology\* combines two heat technologies of convection and microwave for fast, even heating of food product
- Up to five (5) times faster than conventional cooking methods
- “Ventless” Cooking” capability through standard built-in catalytic converter with full protein capability
- Ability to use a standard, ½ size metal baking pan while in convection mode
- Automatic voltage detection (U.S. only)
- Cool to touch door exterior
- MenuConnect™ - Ethernet connection for remote uploads to menus and diagnostics

\*Local codes prevail. These are the “authority having jurisdiction” as stated by the National Fire Protection Association, Inc., in NFPA96-1994.


## Specifications

### Construction

- 430 stainless steel casework and 304 stainless steel interior cavity
- Easy side panel access to internal components
- Easily accessible, front facing air filter

### EasyToUCH™ Control Panel

- Icon driven, color touch screen control panel with the capability of storing up to 1,024 multi-stage recipe programs
- Each program offers up to six (6) stages with programmable cooking times, microwave power settings and user instructions for each stage
- Self diagnostics capability to monitor components
- Easy menu updates or data transfer via USB memory stick
- Multi-language capability

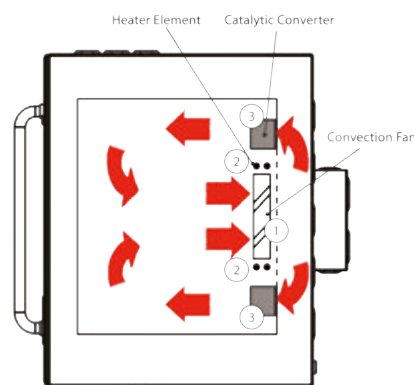


(Top view)


The convection fan (1) draws air from the oven cavity, circulating it over the heating elements (2) to obtain the set temperature and through the catalytic converter (3)\* to clean the air before returning it to the oven cavity.




Model ☐ e5-1530

Overall Size		
Height	25.3"	642 mm
Width	28"	712 mm
Depth (overall with handle)	27.8"	705 mm
Depth (door open 90 degrees)	39"	990 mm
Weight	207 lbs	94 kg
Shipping Weight	235 lbs	106.5 kg
Shipping Box Size	37.4 x 30.3 x 33.85"	950 x 770 x 860 mm
Oven Cavity Dimensions		
Height	10.2"	259 mm
Width	19.5"	495 mm
Depth	14.1"	358 mm
Wall Clearance		
Top	2"	50.8 mm
Sides	2"	50.8 mm
Electrical Specifications		
Phase	1 ph	 NEMA 6-30P
Voltage	208 / 240	
Frequency	60Hz	
Amperage Requirement	30 amp	
Plug	NEMA 6-30P	
Cord Length	6 ft	
Power Consumption	6200W	
Power Output (Microwave)	1400W	
Power Output (Convection)	3.2kW	

Specifications	
Preheat Time	15 minutes
Control System	easyToUCH™, iconic symbol touch screen control panel
Cooking Stages	6
Total Cooking Programs	1,024
Maximum Cooking Time	60:00 (10:00 x6 Stages)
Defrost	No
Microwave Distribution System	Rotating Active Antenna
Magnetron(s)	2
Display	Touchscreen
Interior Light	No
Automatic Voltage Sensor	Yes
USB & MenuConnect Software	Yes
Temperature Range	Off, 212°F - 482°F
Temperature Increments	1°F (from 212°F upwards)
Air Filter	Yes - removable
Convection Fan Speed	High
Convection Fan Speed Increments	N/A
Microwave Power	0%(off), 5%-100%
Microwave Power Increments	1% (from 5% upwards)
Rack	Yes - 1
Rack Positions	2
Turntable	No
Stackable	No
Warranty	1 year parts and labor
Accessories in Box	
Chemco Dirt Buster III Cleaner	1 unit
Chemco Oven Shield	1 unit
Spray Triggers	2 units
Operator Manual / Cleaning Instructions	1 unit
Cool down tray	1 unit
USB Key	1 unit

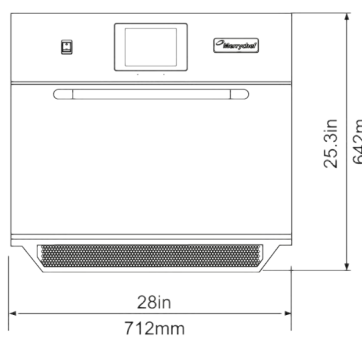

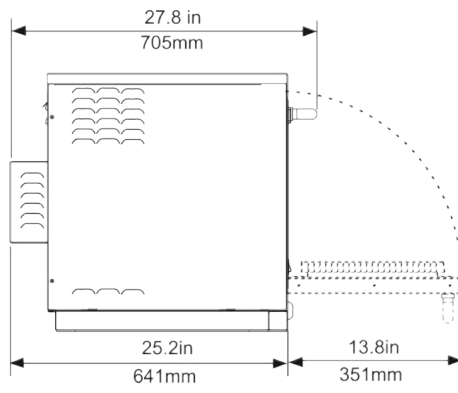

For further information on *Merrychef* products and service or advice on which machine suits you best please contact your sales representative or visit our website at [www.merrychef.com](http://www.merrychef.com).

Specifications subject to change without notice.

**Merrychef U.S.A**  
**1111 N. Hadley Rd.**  
**Ft. Wayne, IN 46804**

**Tel: 877-404-6872**  
**Fax: 800.285-9511**  
**E-Mail: [info@merrychefusa.com](mailto:info@merrychefusa.com)**

**[www.merrychef.com](http://www.merrychef.com)**  
**MCF\_6024 1/18/16**

**Manitowoc**  
**Foodservice**