



# Migali®

PROJECT: \_\_\_\_\_

LOCATION: \_\_\_\_\_

ITEM#: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

## COMPETITOR SERIES®

**C-F40**



**C-F50**



**C-F75**



## FRYERS

- Robertshaw® brand electro-mechanical thermostat for adjusting temperatures within a range of 200°F to 400°F
- 34,000 BTU (natural gas) and 30,000 BTU (LP) per burner
- Beautiful ergonomic design and easy to clean
- All stainless steel tank & cabinetry
- Removable basket hanger for cleaning purposes
- Manual pilot ignition
- Auto reset high limit control for high temperatures
- Cooling zone inside the fryer tank
- Twin nickel chrome plated wire mesh baskets with blue plastic coated handles
- Built in flue deflector
- Full port drain within valve
- (4) adjustable stainless steel legs
- Comes in standard as natural gas or L.P
- Accessory: optional casters upon request
- Migali Industries® Protection Plan: 1 Year Parts & Labor Warranty, 5 Years Oil Tank Warranty

| MODEL                 | BURNERS | VOLUME  | TOTAL BTU<br>NATURAL GAS / LP | PER BTU<br>NATURAL GAS / LP | IN TAKE<br>TUBE<br>PRESSURE<br>(W.C.)<br>NATURAL<br>GAS / LP | NOZZLE<br>NO.<br>NATURAL<br>GAS / LP | IGNITION | VALVE TYPE                                  | THERMOSTAT<br>TEMP LIMIT | TEMP<br>LIMIT | EXTERIOR<br>DIMENSIONS<br>W X D X H | PACKAGING<br>DIMENSIONS<br>W X D X H | WEIGHT   | PACKAGED<br>WEIGHT |
|-----------------------|---------|---------|-------------------------------|-----------------------------|--|--------------------------------------|----------|---|--------------------------|---------------|-------------------------------------|--------------------------------------|----------|--------------------|
| C-F40-NG<br>/C-F40-LP | 3       | 40 lbs. | 102,000 /<br>90,000           | 34,000 /<br>30,000          | 4 / 10   | #36 / #52                            | Manual   | Often open<br>flame,<br>flame<br>protection | 400° F                   | 450° F        | 15.6 x 30.1 x<br>44.4               | 17.7 x 33.5 x<br>37.9                | 131 lbs. | 160 lbs.           |
| C-F50-NG/<br>C-F50-LP | 4       | 50 lbs. | 136,000 /<br>120,000          | 34,000 /<br>30,000          | 4 / 10   | #36 / #53                            | Manual   | Often open<br>flame,<br>flame<br>protection | 400° F                   | 450° F        | 15.6 x 30.1 x<br>44.4               | 17.7 x 33.5 x<br>37.9                | 144 lbs. | 171 lbs.           |
| C-F75-NG<br>/C-F75-LP | 5       | 75 lbs  | 170,000 /<br>150,000          | 34,000 /<br>30,000          | 4 / 10   | #36 / #54                            | Manual   | Often open<br>flame,<br>flame<br>protection | 400° F                   | 450° F        | 21.1 x 30.1 x<br>44.4               | 23.2 x 33.5 x<br>37.9                | 168 lbs. | 200 lbs.           |

Gas Connection: 3/4" NPT on the right

Clearance for combustible work area: 6" rear & 15" sides

Altitudes over 2,000 feet may need high altitude orifice adjustments to deliver BTU output listed

\*MIGALI RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE




**TOLL FREE: 800.852.5292**  
**WEB: www.migali.com**




# DIMENSIONAL DRAWINGS






C-F40

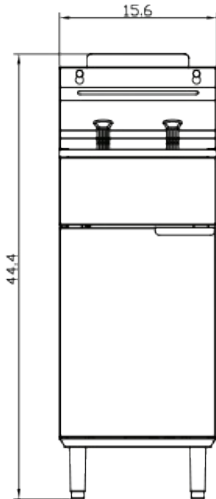

C-F50

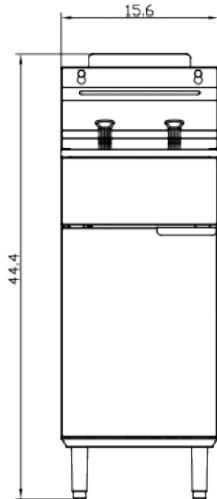

C-F75

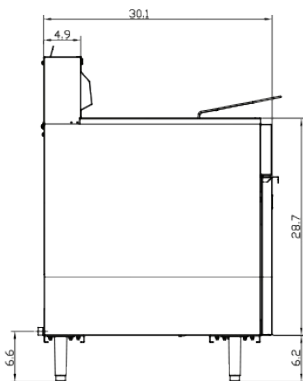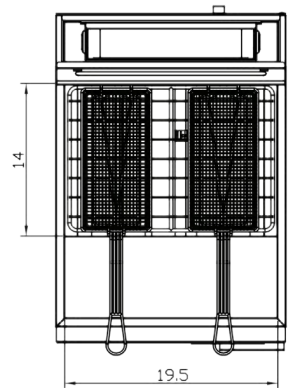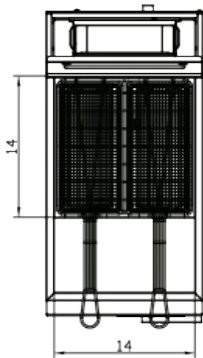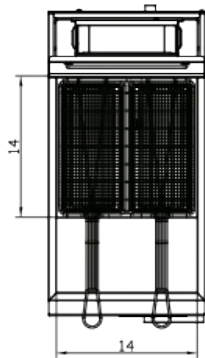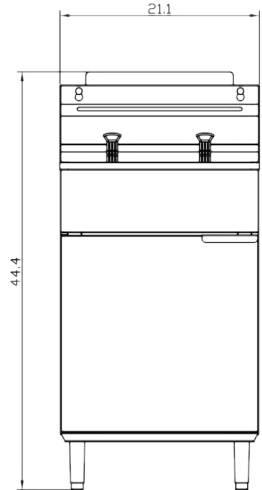

SIDE VIEW



MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955