

## FEATURES:

**Design:** Open wire design offers greater light penetration, air circulation and visibility, as well as, minimal dust and dirt accumulation and lighter weight.

**Assembly:** Plastic shelf clips attach to each post for each shelf and are adjustable on 1" centers along entire length of post. No tools are required for assembly.

**Construction:** Ribs run front-to-back allowing items to slide for easy loading & unloading of shelves. Available in durable zinc finish or epoxy coating.

**Epoxy coating:** Dark green powder epoxy coating that is electroplatically applied and thermostatically cured to a hard, smooth, satin gloss finish. For use in humid or dry storage.

Ten year dry storage warranty.

**Zinc coating:** NSF-listed for dry storage environments.

Bright zinc chloride plating followed by clear chromate plating with sealer coating for improved rust protection.

Ten year dry storage warranty.



**Adjustable leveling feet.**

**Load capacity:** 600-800 lbs per shelf, evenly distributed, depending upon the size. Maximum load per assembled unit not to exceed 2000 lbs without casters.

## ACCESSORIES & REPLACEMENT PARTS:

Wall mounted shelf brackets for 14", 18" and 24" wide shelves



**Plastic shelf clips.** To attach shelves to posts. No tools are required.



**Adjustable leveling feet.**

**"S" hooks** Use to add shelf units using only 2 posts.


**Casters** with bumpers for mobile shelving units.



DATE: \_\_\_\_\_ MODEL NO: \_\_\_\_\_

PROJECT: \_\_\_\_\_

# SPECIFICATIONS

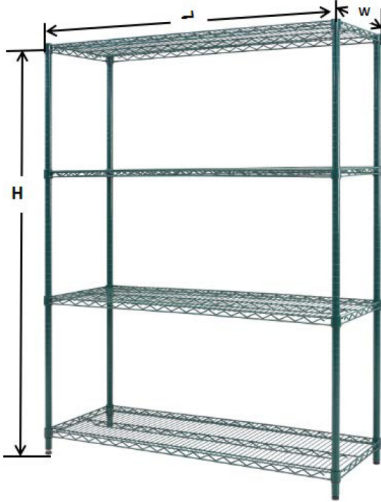

## WIRE SHELVING & ACCESSORIES



WIDTH(in.)	ZINC	EPOXY	LENGTH(in.)	HEIGHT(in.)
14	KX1425	KX1424	24	72
	KX1437	KX1436	36	72
	KX1449	KX1448	48	72
	KX1461	KX1460	60	72
	KX1473	KX1472	72	72
18	KX1825	KX1824	24	72
	KX1837	KX1836	36	72
	KX1849	KX1848	48	72
	KX1861	KX1860	60	72
	KX1873	KX1872	72	72
24	KX2425	KX2424	24	72
	KX2437	KX2436	36	72
	KX2443	KX2442	42	72
	KX2449	KX2448	48	72
	KX2461	KX2460	60	72
	KX2473	KX2472	72	72

Shelves are packaged 1 set to a carton