



Item: _____

Quantity: _____

Project: _____

24" Electric Restaurant Range

Models: ☐ RRE-4 ☐ RRE-2GT12 ☐ RRE-GT24



Shown with optional casters

Voltage: ☐ 208V ☐ 240V

Phase: ☐ 1 Phase ☐ 3 Phase

Options and Accessories

- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: _____")
- ☐ 9" deep S/S front landing ledge, with or without sauce pan cutouts
- ☐ Additional oven racks
- ☐ Open storage cabinet base - add suffix "-XB"
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ 5" swivel casters (set of four - 2 locking)

Standard Features

- Stainless steel front, sides, control panel and kick plate including backguard and high shelf
- Stainless steel full width drip tray
- Oven - 4 KW - dual element system - 3KW on oven bottom and 1 KW on oven top for better bake pattern and heat dispersement
- Oven thermostat controls, 200 °-500 °F
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior for easy cleaning
- 9" solid hot plate elements, 2KW each
- "Always Operational" with three internal circuit breakers - one for half the burners, one for the other half and one for the oven to insure the unit is never completely down
- Sealed oven cavity to prevent spills from contacting elements and causing damage
- One year limited warranty, parts and labor





Royal Range of California, Inc.
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com




24" Electric Restaurant Range


24" Electric Restaurant Range

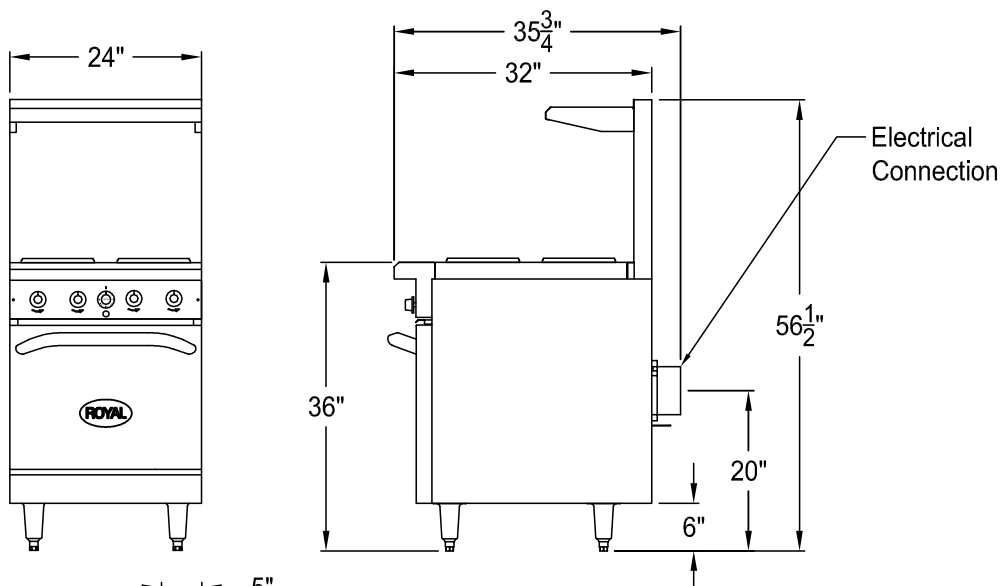

RRE-4



RRE-2GT12



RRE-GT24

Model Number	Total KW	Voltage	A M P S				
			1 Phase		3 Phase		
			L1	L3	L1	L2	L3
RRE-4	12	208	60	60	46	38	46
		240	52	52	40	32	40
RRE-2GT12	11.4	208	56	56	42	38	38
		240	49	49	40	36	34
RRE-GT24	10.8	208	53	53	34	30	34
		240	46	46	32	28	32

To be installed only in noncombustible surroundings. See installation instructions.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.