



Item: _____
Quantity: _____
Project: _____

72" Electric Restaurant Range

Models: ☐ RRE-12 ☐ RRE-10GT12 ☐ RRE-8GT24 ☐ RRE-6GT36
☐ RRE-4GT48 ☐ RRE-2GT60 ☐ RRE-GT72



Voltage: ☐ 208V ☐ 240V
Phase: ☐ 1 Phase ☐ 3 Phase

Options and Accessories

- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: _____")
- ☐ 9" deep S/S front landing ledge, with or without sauce pan cutouts
- ☐ Additional oven racks
- ☐ Open storage cabinet base - add suffix "-XB"
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ 5" swivel casters (set of four - 2 locking)

Standard Features

- Stainless steel front, sides, control panel and kick plate including backguard and high shelf
- Stainless steel full width drip tray
- Oven - total 5 KW with low wattage "broiler" element
- Oven thermostat controls, 200°-500°F
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- 9" solid hot plate elements, 2KW each
- 3/4 thick polished steel griddle plate
- GT Griddle Series - standard with thermostat every 12"
- One year limited warranty, parts and labor



Intertek
3065360




Intertek

Royal Range of California, Inc.
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com



72" Electric Restaurant Range

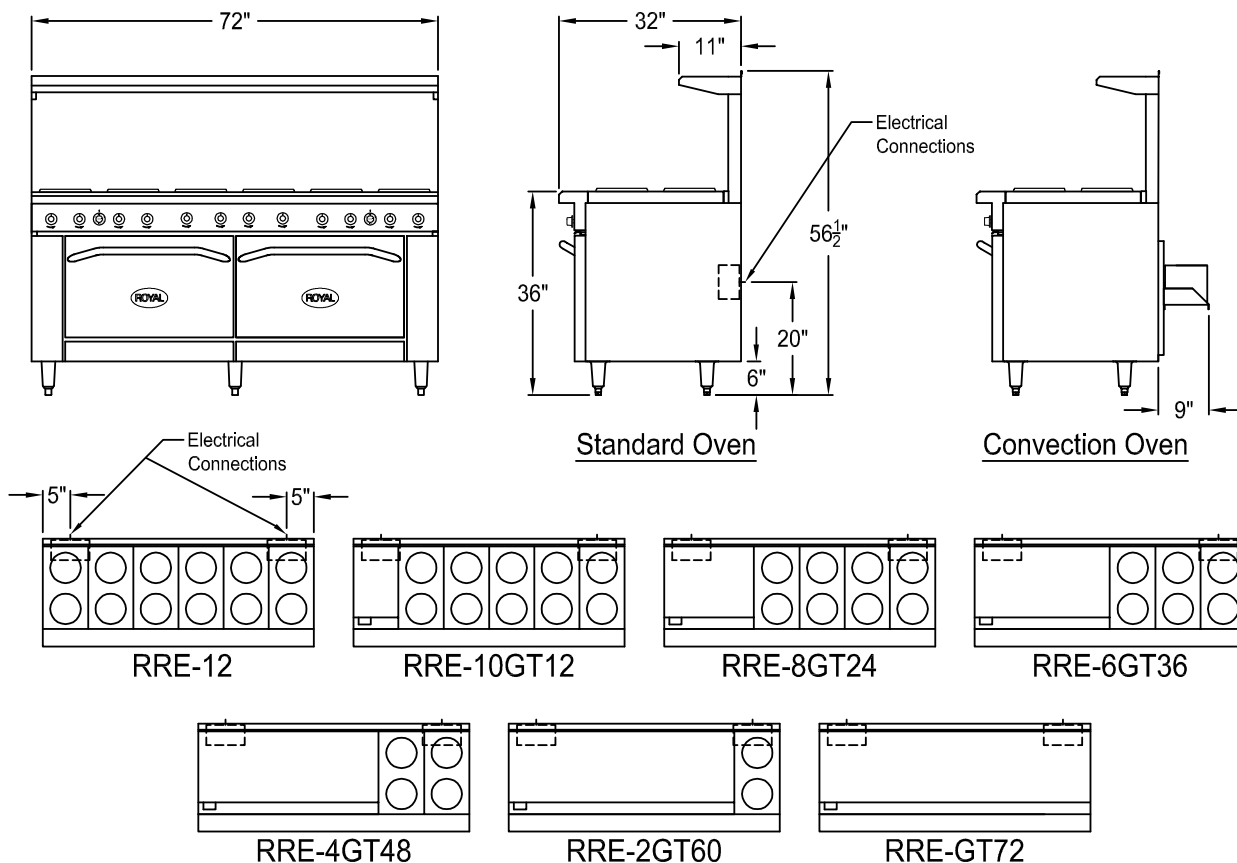

Model Number	Total KW	Voltage	A M P S				
			1 Phase		3 Phase		
			L1	L3	L1	L2	L3
RRE-12	34	208	164	164	96	104	96
		240	144	144	82	92	82
RRE-10GT12	33.4	208	161	161	94	98	94
		240	141	141	81	86	81
RRE-8GT24	32.8	208	158	158	92	96	92
		240	138	138	79	84	79
RRE-6GT36	32.2	208	155	155	91	95	91
		240	136	136	78	83	78
RRE-4GT48	31.6	208	152	152	89	89	89
		240	133	133	77	77	77
RRE-2GT60	31	208	149	149	87	87	87
		240	130	130	75	75	75
RRE-GT72	30.4	208	146	146	86	86	86
		240	128	128	74	74	74

72" Electric Range units have two electrical connections

To be installed only in noncombustible surroundings. See installation instructions.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com