

Duke Specifications

F.O.B. Sedalia, Missouri 65301



7122A-3072
Maple Top w/Adjustable Undershelf



7123-3072
Maple Top w/Tubular Base

OPTIONS:

- ☐ Cross bracing welded to table
- ☐ Casters, swivel, two w/locks, 5" diameter, rubber tires
- ☐ Casters, swivel, two w/locks, 5" diameter, polyurethane tires
- ☐ Spice bins - **201**
- ☐ Portable ingredient bin - **5027**
- ☐ 5"H maple riser - specify back only or sides and back - standard or coved
- ☐ Stainless steel adjustable bullet feet
- ☐ Drawer, standard - **185** or **186**
- ☐ Drawer, deluxe - **176** or **177**
- ☐ Tier of drawers (3) - **731** (S/S) or **732** (Galv.)

AGENCY LISTING:



DUKE MANUFACTURING CO.
P. O. Box 5426
St. Louis, MO 63147-0230

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com



"Your Solutions Partner"

PROJECT INFORMATION:

PROJECT: _____
ITEM: _____
QUANTITY: _____

MODEL:

Aerohot Worktables
Maple Top Tables

- ☐ **7121A** Galvanized undershelf/galvanized legs/plastic feet
- ☐ **7122A** Stainless steel undershelf/stainless steel legs & feet
- ☐ **7123** Galvanized tubular bracing/galvanized legs/plastic feet
- ☐ **7124** Stainless steel tubular bracing/stainless steel legs & feet

TOP:

- ☒ 1-3/4" thick laminated edge-grained hard maple

ADJUSTABLE UNDERSHELF:

- ☐ Heavy gauge galvanized OR stainless steel, as specified
- ☒ Die-formed corners
- ☒ Set screws to lock in place

CROSS BRACING (for tubular base tables):

- ☐ 1-5/8" stainless or galvanized steel tubing
- ☒ 10" from floor
- ☒ Attached with slotless, contour-head bolts

LEGS:

- ☐ Galvanized leg sockets welded to hat channels
- ☐ Non-marking, non-corrosive, adjustable plastic bullet feet for galvanized legs
- ☐ Stainless steel feet for stainless steel legs
- ☒ 1-5/8" diameter, S/S or alvanized tubular legs

SHORT FORM SPECIFICATIONS:


Duke Aerohot Worktables - Maple Top Tables. Top shall be constructed of 1-3/4" thick laminated edge-grained hard maple. Adjustable undershelf to be of heavy gauge galvanized or stainless steel with aluminum die-cast corners to provide tight sanitary contact with legs. Locks in place with set screws at any height. If adjusted to less than 6" from floor, tables will not be NSF approved. Bracing can be ordered welded integrally to table. Legs shall have heavy gauge galvanized leg sockets screwed securely to underside of top and designed to provide maximum rigidity to 1-5/8" diameter, heavy gauge galvanized legs fitted with adjustable plastic bullet feet or stainless steel tubular legs fitted with adjustable stainless steel feet. As option, legs may be fitted with stainless steel feet. Tables 96" or longer to have 6 legs. Also available mounted on NSF approved 5" diameter swivel casters, two with locks, in lieu of adjustable feet. Shipped knocked down for quick, easy assembly.




AEROHOT WORKTABLES MAPLE TOP TABLES

- ☐ **7121A** Galvanized undershelf/galvanized legs/plastic feet
- ☐ **7122A** Stainless steel undershelf/stainless steel legs & feet
- ☐ **7123** Galvanized tubular bracing/galvanized legs/plastic feet
- ☐ **7124** Stainless steel tubular bracing/stainless steel legs & feet


NOTE: TO ORDER TABLES ADD NUMBERS IN TOP WIDTHS AND TOP LENGTHS COLUMNS TO MODEL NUMBERS FOR SPECIFIC TABLE SIZES.
EXAMPLE: 7121A-2436 for 24" wide x 36" long 7121A Table.

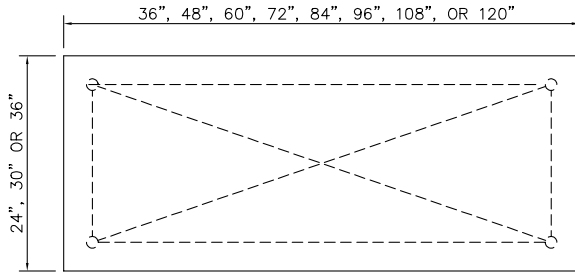

TOP VIEW

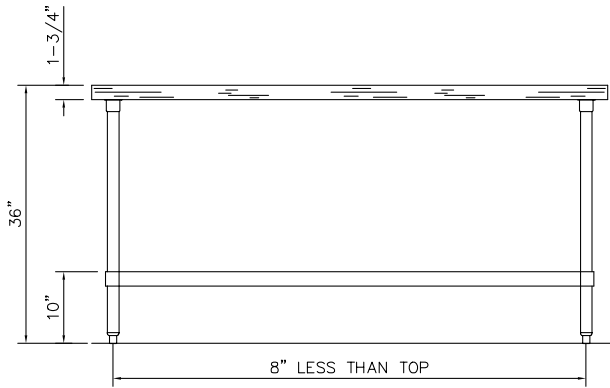

FRONT VIEW



SIDE VIEW

DIMENSIONS:

Maple Top Tables with Adjustable Undershelf - Height: 36" (91.4 cm)

Freight Class: 55

Model	Top Width		Cube Feet Crated							
	in.	cm	36" 91.4 cm	48" 121.9 cm	60" 152.4 cm	72" 182.9 cm	84" 213.4 cm	96" 243.8 cm	108" 274.3 cm	120" 304.8 cm
7121A Galv. Undershelf Galv. Legs	24	61.0	21.8	28.6	35.5	42.4	49.2	56.1	63.0	69.8
	30	76.2	26.8	35.2	43.7	52.1	60.6	69.0	77.5	86.0
	36	91.4	31.8	33.5	51.9	61.9	72.0	82.0	92.0	102.1
7122A S/S Undershelf S/S Legs	24	61.0	21.8	28.6	35.5	42.4	49.2	56.1	63.0	69.8
	30	76.2	26.8	35.2	43.7	52.1	60.6	69.0	77.5	86.0
	36	91.4	31.8	33.5	51.9	61.9	72.0	82.0	92.0	102.1

Maple Top Tables with Tubular Base - Height: 36" (91.4 cm)

Freight Class: 55

Model	Top Width		Top Lengths - in. to cm							
	in.	cm	36" 91.4 cm	48" 121.9 cm	60" 152.4 cm	72" 182.9 cm	84" 213.4 cm	96" 243.8 cm	108" 274.3 cm	120" 304.8 cm
7123 Galv. Tubular Bracing Galv. Legs	24	61.0	21.8	28.6	35.5	42.4	49.2	56.1	63.0	69.8
	30	76.2	26.8	35.2	43.7	52.1	60.6	69.0	77.5	86.0
	36	91.4	31.8	33.5	51.9	61.9	72.0	82.0	92.0	102.1
7124 S/S Tubular Bracing S/S Legs	24	61.0	21.8	28.6	35.5	42.4	49.2	56.1	63.0	69.8
	30	76.2	26.8	35.2	43.7	52.1	60.6	69.0	77.5	86.0
	36	91.4	31.8	33.5	51.9	61.9	72.0	82.0	92.0	102.1



DUKE MANUFACTURING CO.
P. O. Box 5426
St. Louis, MO 63147-0230

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

"Your Solutions Partner"