



Topping Equipment Hot Topping

Models Twin FS/FSP,
Twin FSP, Twin FS

Date:

Project:

Quantity:

Item Number:



Twin FS/FSP #81290



Twin FS #81220



CE Units Available

Warranty

Server Products equipment is backed by a two-year limited warranty against defects in materials and workmanship. For our complete warranty statement, see our Website or contact us.

Bid Description

All stainless steel construction with a brushed (#4) finish. Each dispenses directly from two stainless steel jars or #10 cans. We recommend our NSF approved Stainless Steel Jar #94009. Your local jurisdiction may not permit dispensing from a #10 can.

Two adjustable precalibrated thermostats control individual 500 watt heating elements. Temperature settings—marked on thermostat knobs—range from 100° F (38° C) to 200° F (93° C). Power is controlled with two ON/OFF rocker switches.

The Twin FS/FSP is designed to pump and ladle hot toppings. Comes complete with a lift-off lid and 1-ounce (30 mL) 10" (25.4 cm) Ladle #82561. The pump features a rugged cast valve body and welded construction. Maximum stroke yields 1-ounce (30 mL). Gauging collars are supplied to reduce yield in 1/4-ounce (7 mL) increments.

The Twin FSP is designed to pump two hot toppings.

The Twin FS is designed to ladle two hot toppings.

Standard Features

All stainless steel construction for durability

New pump design prevents loss of valve balls

Water fill line eliminates overflow accidents

Two 500 watt heating elements for reliable heating and holding

Adjustable precalibrated thermostats for accurate heat control

Temperature marks on knobs with protective knob guard

Dispense directly from stainless steel jars or #10 cans

Pump maximum stroke yields 1-ounce (30 mL)

Easy-to-adjust portion control in 1/4-ounce (7 mL) increments

Two cleaning brushes included with pumps for maintenance

Hot Topping Equipment Accessories

☐ 1-ounce (30 mL) 10" (25.4 cm) Ladle #82561

☐ 3-quart (2.8 L) Stainless Steel Jar #94009


Specifications on reverse side



Topping Equipment Hot Topping

Models Twin FS/FSP,
Twin FSP, Twin FS

Twin Fudge Server with Pump and Ladle

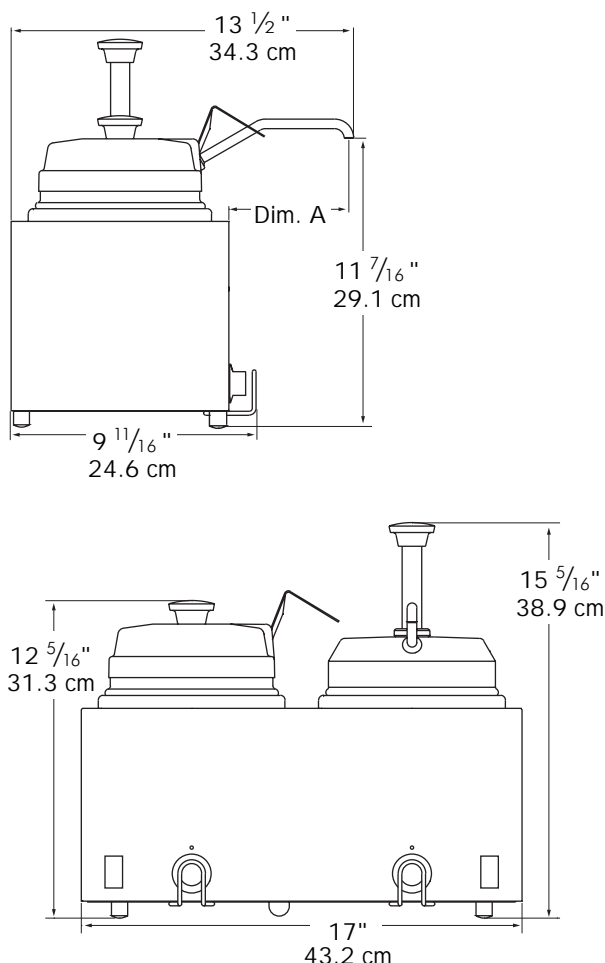

Specifications

Construction	Brushed (#4) stainless steel units. Pumps feature a rugged cast valve body and welded construction.
Capacity	Two stainless steel jars or #10 cans hold 3-quarts (2.8 L) each; 6-quart (5.7 L) total.

Models	Twin FS/FSP #81290	Twin FSP #81230	Twin FS #81220
Height in cm	15 ⁵ / ₁₆ 38.9	15 ⁵ / ₁₆ 38.9	12 ⁵ / ₁₆ 31.3
Width in cm	17 43.2	17 43.2	17 43.2
Depth in cm	13½ 34.3	13½ 34.3	9 ¹¹ / ₁₆ 24.6
Dim. A in cm	4¾ 12.1	4¾ 12.1	N/A
Ship Weight	19 lb 8.6 kg	20 lb 9.1 kg	18 lb 8.2 kg
Electrical	120V, 60Hz, 1000W, 8.3A 72 in (183 cm) cord set NEMA 5-15P, 15A, 120V PLUG		

FOB Richfield, Wisconsin 53076

CAD Library

We are a member of The KCL CADalog with more than 100 other manufacturers. Our CAD files can be purchased through Kochman Consultants, Ltd. at 847-470-1195, or e-mail sales@kclcad.com. Their website is at www.kclcad.com.

