

PATRIOT

FLOOR GAS FRYER

PT-F3

PT-F5

PT-F4



Specifications

- Welded 16 gauge stainless steel tank finish ensures easy cleaning
- Long lasting baffles are mounted in the heat exchange tubes to provide maximum heating and combustion efficiency
- Standing pilot light design provides a ready flame when heat is required
- Cabinet is constructed of stainless steel front and door with galvanized sides and back
- The fryer comes with 3/4" NPT male connector on a 1/2" pipe, allowing you to connect with either 3/4" or 1/2" NPT female connector

Standard Accessories

- Two nickel plated oblong wire mesh baskets with coated handles
- One nickel plated tube rack
- One steel drain extension
- 4" Casters

Approvals

- CSA Certification
- CSA Sanitation, NSF/ANSI 4

Operations

- Standing pilot and thermostat maintain temperature automatically at the selected temperature (between 200°F(93°C) and 400°F (204°C))
- Front 1-1/4" drain, for quick draining

Available options & Accessories

- Stainless steel cover
PT-F3, PT-F4 cover # 266211-1;
PT-F5 cover # 266211-3
- Stainless steel joining strip
PT-F3, PT-F4 strip # 50109;
PT-F5 strip # 501020


Controls

- Thermostat maintains temperature between 200°F(93°C) and 400°F(204°C)
- Integrated gas control valve acts as a manual and pilot valve, automatic pilot valve, gas filter, pressure regulator and automatic main valve
- Gas control valve prevents gas flow to the main burner until pilot is established and shuts off all the gas flow automatically if the pilot flame goes out
- Temperature limit automatically shuts off all gas flow if the fryer temperature exceeds 450°F(232°C)



PATRIOT

PlanView

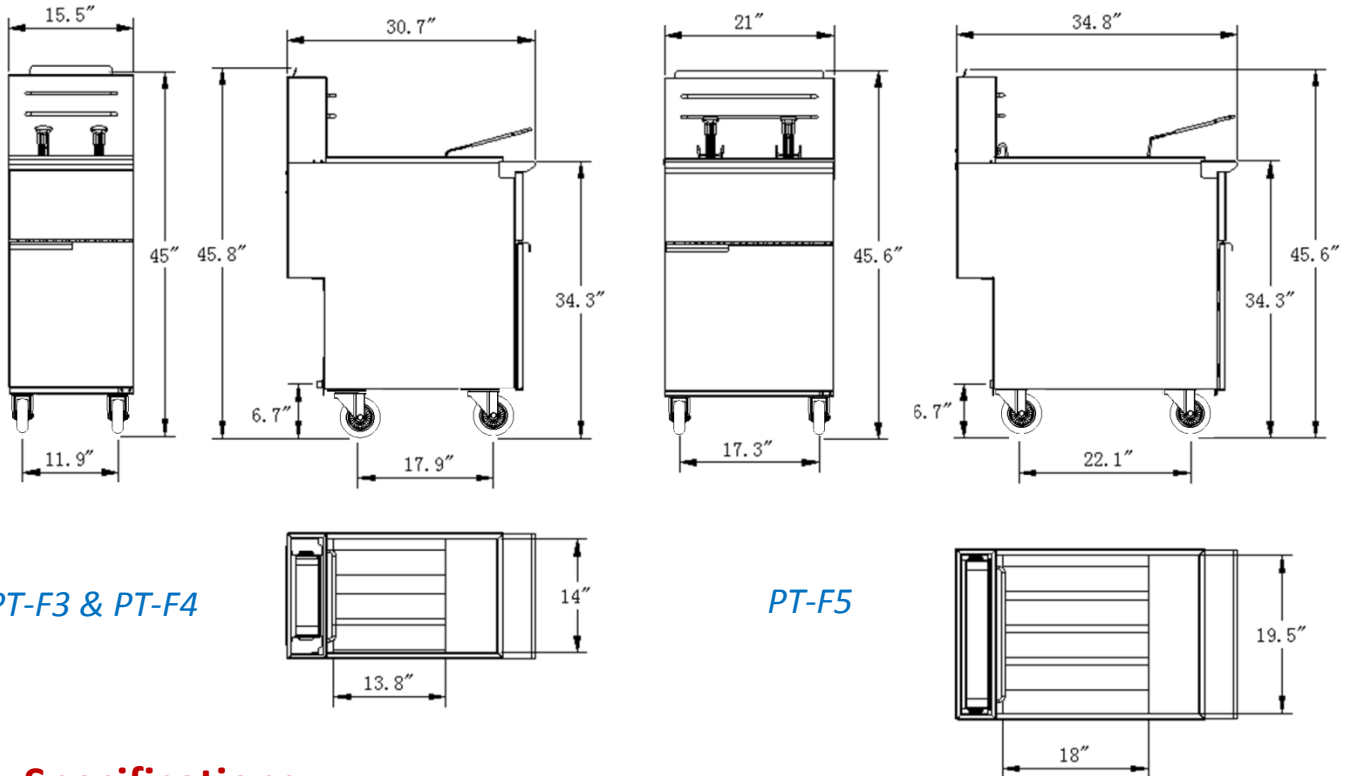

Specifications

Model Number	BTU	Net Weight(lb)	Gross Weight(lb)	Oil Capacity(lb)
PT-F3-NG	90,000	125	145	35-40 (17-20 L)
PT-F3-LP	90,000	125	145	35-40 (17-20 L)
PT-F4-NG	120,000	139	155	45-50 (20-23 L)
PT-F4-LP	120,000	139	155	45-50 (20-23 L)
PT-F5-NG	150,000	182	204	65-70 (36-42 L)
PT-F5-LP	150,000	182	204	65-70 (36-42 L)

Shipping Information

Model Number	Cubic feet	Dimensions (inch)
PT-F3-NG	10.5 (0.3cubic meter)	W16 1/2" * D32 1/4" * H33 1/2"
PT-F3-LP	10.5 (0.3cubic meter)	W16 1/2" * D32 1/4" * H33 1/2"
PT-F4-NG	10.5 (0.3cubic meter)	W16 1/2" * D32 1/4" * H33 1/2"
PT-F4-LP	10.5 (0.3cubic meter)	W16 1/2" * D32 1/4" * H33 1/2"
PT-F5-NG	16 (0.45cubic meter)	W22 1/2" * D36 1/4" * H33 1/2"
PT-F5-LP	16 (0.45cubic meter)	W22 1/2" * D36 1/4" * H33 1/2"