

PT-R24 PT-R36 PT-R36-24MG-2B PT-R60 PT-R60-24MG-2B PT-R60-24CB-2B

Features

- 30,000BTU per top open burner (Natural Gas)
- 12"X12"cast iron grates with aeration bowl
- Standing Pilot light for individual burners
- 33,000 BTU static oven(s) (Natural Gas)
- Oven interior side guides & Bottom porcelain coated
- Oven thermostat adjusts from 200F-500F
- Stainless steel front, Back riser, and lift off shelf
- Oven with 2-racks,3 positions
- 5" casters, All swivel with front locking brakes.
- Cool-to-the-touch front S/S deck
- Easy to remove full width crumb tray
- Range is fully serviceable from the front
- Optional adjustable foot available.
- 3/4" rear NPT gas inlet
- Field convertible to LPG - L.P. orifices included

Approvals

- CSA Certification
- CSA Sanitation, NSF/ANSI 4










Planview

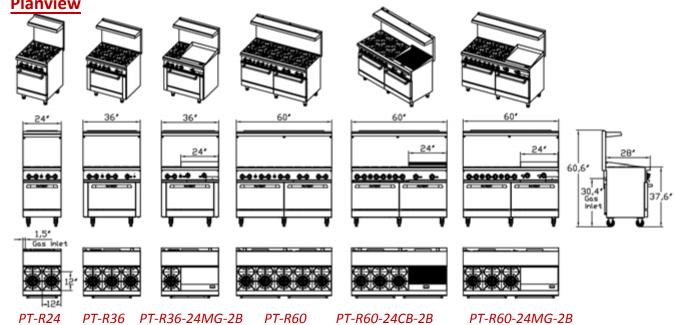

Specifications

Model	View	Top Open Burners	Top Griddle	Top Charbroiler	Bottom Oven	Total kBTU (NG)	Total kBTU (LP)	Shipping Width (inch)	Shipping Deepth (inch)	Shipping Height (inch)	Grass Weight (lbs)
PT-R24	888	4			One 24"	153	136	27 1/2	36 5/8	47 3/4	364
PT-R36	100000	6			One 36"	213	190	39 3/8	36 5/8	47 3/4	478
PT-R36-24MG-2B	8	2	24"		Double 24"	246	218	39 3/8	36 5/8	50 1/2	537
PT-R60	9899999	10			Double 36"	366	326	63	36 5/8	47 3/4	759
PT-R60-24MG-2B	18888	6	24"		Double 36"	306	272	63	36 5/8	50 1/2	828
PT-R60-24CB-2B	8888	6		24"	Double 36"	316	288	63	36 5/8	50 1/2	784

Warranty

Patriot warrants this product to be free of defects in materials and workmanship for a period of 1 year from the date of purchase.