## Tes

## T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

EC-3130-HG

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

	This Space for Architect/Engineer		neer Approval
Ø2 1/2"	ChekPoint"	Job Name	Date
ADA Compliant [64mm] Cold		Model Specified	Quantity
		Customer/Wholesaler	
db.		Contractor	
Hot		Architect/Engineer	
- 1			/4.011
	—Swivel Goosened		
	2.2 GPM [8.3 L/n Vandal Resistant	Aerator.	
	Rigid Conversion 014200-45 Lock		
	(Included)	VVddilei	1)
Internal Above Deck Electronics w/ Flow	∕─Temperature Mix	ring Handle	11 1/16"
Control Setting Switches.	w/ Color Coded I	ndex	[281mm]
Optional DC Power w/ 6 V Lithium Battery.	(Optional Plug In Replace Handle	When 0.3/4	
	Temperature is F	Preset) [172mm]	
Removable Anti-Rotation Pin— M	ounting	ļ ļ	90
	urface		
13/16"		1 1/2"	717
[21mm]		[ 38mm ] Maximum /	/
Connection to	/ 19" [486mm] Flea Stainless Steel S	XIDIE Thiskness /	· ·
Power Supply /	Hoses	_Sh	own w/ Optional
		Plu Wa	g Installed When Iter Temperature
			Preset (Included)
	/ 1		
1/2" NPSM Swivel Ends w/ Filter Washers			
		W/ Timer Praemere	
Optional 100 240 VAC		—Hydro-Generator Power Sเ	
Optional 100-240 VAC		No Battery or AC Adapter I to Supply Power to Faucet	Needed
Adapter w/ 144" [3658mm] Power Cord w/ 2 Terminal			
Plugs (Included)		—Check Valve Adapters	
Rough-In Requirement:	8	w/ 3/8" Compression (9/16-24 UN) Inlets	
$\phi$ 1 1/4" [32mm] Mounting Hole	(C)	(5/ 10 24 514) IIII015	
Ø 3/16" [5mm] Anti-Rotation Pin Hole (Optional)			
Product Specifications:	nias Fausat Cinal	Product Compliance	•

Chrome Plated Brass Above Deck Electronics Faucet, Single Hole Deck Mount, Swivel/Rigid Gooseneck, 2.2 GPM VR Aerator, Point-of-Use Temperature Control, Hydro-Generator Powered, Stainless Steel Flexible Supply Hoses & 3/8" Compression Inlets

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951

Drawn: DMH Checked: GEF Approved: JHB Date: 04/22/14 Scale: 1:6 Sheet: 1 of 2



## T&S BRASS AND BRONZE WORKS, INC.


2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690

Model No.

EC-3130-HG

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com




(8)

ITEM DESCRIPTION SALES NO. NO. Swivel Gooseneck w/ VR 2.2 GPM 1 018590-40 Aerator w/ Key VR 2.2 GPM Aerator, 55/64-27 Female 2 B-0199-06 w/ Key Swivel Washer 3 009538-45 4 011429-45 Swivel Sleeves (2) 5 001074-45 O-Ring 014200-45 Star Washer, Anti-Rotation 6 7 019087-45 6VDC Lithium Battery, CR-P2 8 019088-45 Auxiliary Power Connector Cable 9 018544-45 SS Flex Hose w/ Check Valve Adapter 10 5EF-0002 A/C Transformer 11 019082-45 Lever Asm & Body Screw Kit w/ L-Key 12 EC-HYDROGEN HydroGenerator Power Supply 13 1/2" NPSM Swivel Coupling 017506-45 019086-45 Body Plug, Pre-Set Temperature 14

Flow Control Switches are Located Behind the Sensor. Remove Battery to Access Switches.

- Switches are set to DEFAULT position:
  - Auto Time Out = 15 seconds
  - Shut Off Delay = 1 second
  - Auto Flush = ÓFF
- \* Available Water Flow Control Selections:
  - Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min

  - Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

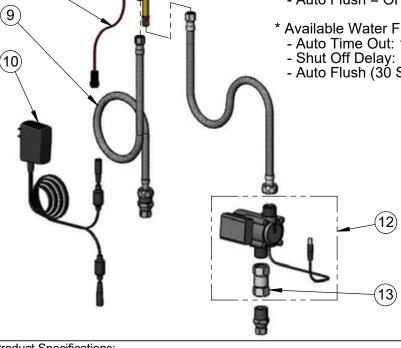



Optional Plug Replaces Lever Handle When Pre-setting Temperature (Installs from Inside of Body)





018543-45 Torx T-20 VR L-Key

015425-45 VR Aerator Key

**Product Specifications:** 

Chrome Plated Brass Above Deck Electronics Faucet, Single Hole Deck Mount, Swivel/Rigid Gooseneck, 2.2 GPM VR Aerator, Point-of-Use Temperature Control, Hydro-Generator Powered, Stainless Steel Flexible Supply Hoses & 3/8" Compression Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951

Drawn: DMH Checked: **GEF** Approved: JHB Date: 04/22/14 Scale: NTS Sheet: 2 of 2