Fittings Drawn:

DHL

Checked:

KJG

Approved:

JHB

Date:

T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690

Model No.

EC-3130-LF22

Item No.

1:6

Sheet: 1 of 2

UL 1951

Scale:

12/20/14

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

A2 4/0"	是	This Space for A	rchitect/Engineer Approval
\emptyset 2 1/2" $\boxed{64 \text{mm}}$ Cold		Job Name	Date
[5 mm]	ADA Compliant	Model Specified	Quantity
Suring Cooperations	ChekPoint [™]	Customer/Wholesaler	
B-0199-21-VRF	○ ChekPoint	Contractor	
VR 2.2 GPM Laminar Flow Device. Rigid		Architect/Engineer	
Conversion Requires			ı 5 7/16" ı
014200-45 Lock Washer (Included)			[137mm]
,			
1			
ll ll			
Internal Above Deck Electronics w/ Flow			4
Control Setting Switches.	nperature Mixing F Color Coded Index	landle	11 1/16"
Lithium Battam (Opt	tional Plug Include	ed to 6 3/4"	[281mm]
/ Rep	lace Handle Wher perature is Prese	'	
Removable Anti-Rotation Pin—			
\ WIOU	unting face	<u> </u>	
	1400		
13/16" [21mm]		1 1/2"	1 / 1
(2)		Maximur	' '
		Thicknes	/
			[∠] Shown w/ Optional Plug Installed When
	-19" [483mm] Fle		Water Temperature is Preset (Included)
	Stainless Steel : Hoses	Supply	is Fleset (iliciaded)
	─1/2" NPSM Swiv w/ Filter Washe		
Optional 100-240 VAC			
Adapter w/ 144" [3658mm] Power Cord w/ 2 Terminal	—Chaak Valva Ad	ontoro	
Plugs (Included)	Check Valve Ad— w/ 3/8" Compres	ssion	
Davide la Davida contra	(9/16"-24 UN) Ir	llets	
Rough-In Requirement: ∅1 1/4" [32mm] Mounting Hole			
Ø3/16" [5mm] Ånti-Rotation Pin Hole (Optional)			
Product Specifications: Chrome Plated Brass Above Deck Flectroni	cs Faucet Singl	- Hala	t Compliance:
Chrome Plated Brass Above Deck Electronics Faucet, Single Hole Deck Mount, Swivel Gooseneck w/ VR 2.2 GPM Laminar Flow			A112.18.1 / CSA B125.1 I - Section 9
Device, Point-of-Use Temperature Control, I Powered, Flexible Stainless Steel Supply Ho	Battery or AC Ac	nnression ANSI A	72 (Low Lead Content) .117.1 (ADA)
- oviciou, i loxible cialilicas cicci cupply i le	2003 W/ 0/0 COI	1101 6331011 Ul 195	1




T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

EC-3130-LF22

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

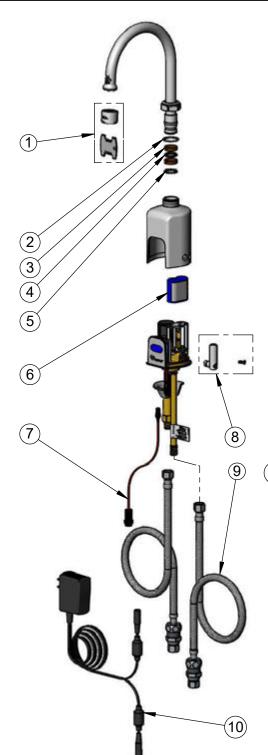

ITEM NO.	SALES NO.	DESCRIPTION
1	B-0199-21-VRF	2.2 GPM VR Laminar Flow Device
2	009538-45	Swivel Washer
3	011429-45	Swivel Sleeves (2)
4	001074-45	O-Ring
5	014200-45	Star Washer, Anti-Rotation
6	019087-45	6VDC Lithium Battery, CR-P2
7	019088-45	Auxiliary Power Connector Cable
8	019082-45	Lever & Body Screw Kit w/ L-Key
9	018544-45	Flexible Stainless Steel Hose w/ Check Valve Adapter
10	5EF-0002	A/C Transformer
11	019086-45	Body Plug, Pre-Set Temperature



A maximum of (8) ChekPoint faucets can be powered by EC-HARDWIRE ChekPoint Hardwire AC Transformer when connected using EC-ADEWIRE cables. (Both sold separately)



Optional Plug Replaces Lever Handle When Pre-setting Temperature (Installs from Inside of Body)



015425-45 VR Aerator Key



018543-45 Torx T-20 VR L-Key

Flow Control Switches are Located Behind the Sensor. Remove Battery to Access Switches.

- * Switches are set to DEFAULT position:
 - Auto Time Out = 15 seconds
 - Shut Off Delay = 1 second
 - Auto Flush = ÓFF
- * Available Water Flow Control Selections:
- Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min
- Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec
- Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

Product Specifications:

Chrome Plated Brass Above Deck Electronics Faucet, Single Hole Deck Mount, Swivel Gooseneck w/ VR 2.2 GPM Laminar Flow Device, Point-of-Use Temperature Control, Battery or AC Adapter Powered, Flexible Stainless Steel Supply Hoses w/ 3/8" Compression Fittings

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951

Drawn: DHL Checked: KJG Approved: JHB Date: 12/20/14 Scale: NTS Sheet: 2 of 2